

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0749790901](#)
Status: **Active**
Overview: [vhdm__hsd](#)
Description: 2.00mm (.079") Pitch 6-Row VHDM-HSD™ Backplane Header, Open Module, 36 Circuits, Gold (Au) Selective 0.76µm (30µ"), Pin Length 4.75mm (.187")

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-74031-999 \(PDF\)](#)

Agency Certification


UL E29179

General

Product Family Backplane Connectors
Series [74979](#)
Application Backplane
Application Tooling Documents Tooling Manual
Comments Open Header
Component Type PCB Header
Overview [vhdm__hsd](#)
Product Name VHDM-HSD™
Style N/A

Physical

Circuits (Loaded) 36
Circuits (maximum) 36
Color - Resin Black
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part None
Material - Metal Copper-Nickel-Silicon, High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Tin-Lead
Material - Resin High Temperature Thermoplastic
Number of Columns 9
Number of Pairs Open Pin Field
Number of Rows 6
Orientation Vertical
PCB Retention None
PCB Thickness Recommended (in) 0.070 In
PCB Thickness Recommended (mm) 1.80 mm
Packaging Type Tube
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.75
Plating min: Termination (µin) 30
Plating min: Termination (µm) 0.75
Polarized to PCB Yes
Stackable Yes
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -55°C to +105°C



Series

image - Reference only

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[74979Series](#)

Mates With

[74880 VHDM\HSD Daughtercard](#). [74886 VHDM\HSD Hybrid Daughtercard](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
VHDM® Signal Pin	0622015700
Insertor Repair Tool	

Termination Interface: Style

Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact

1A

Data Rate

5.0 Gbps

Real Signals (per 25mm)

48

Voltage - Maximum

120V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Product Specification

PS-74031-999

Sales Drawing

SD-74979-010

VHDM-HSD is a trademark of Amphenol Corporation

This document was generated on 05/28/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

12 11 10 9 8 7 6 5 4 3 2 74979

J

I

H

G

F

E

D

C

B

A

J

I

H

G

F






E

D

C

B

A

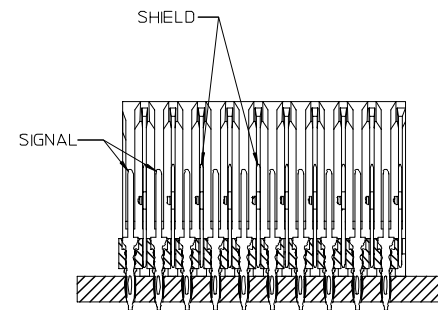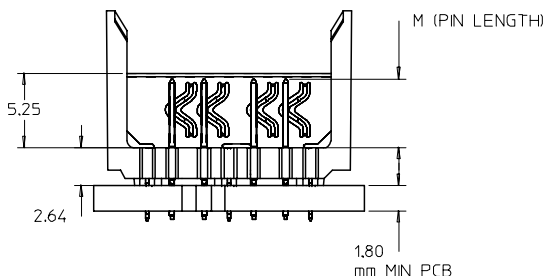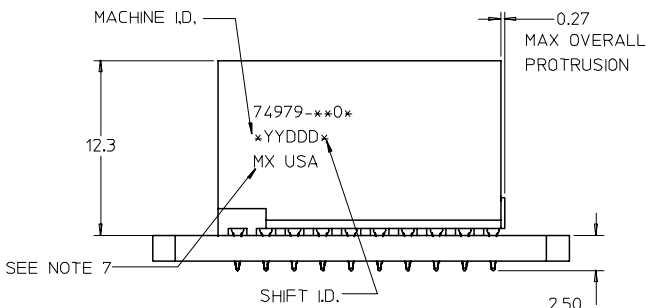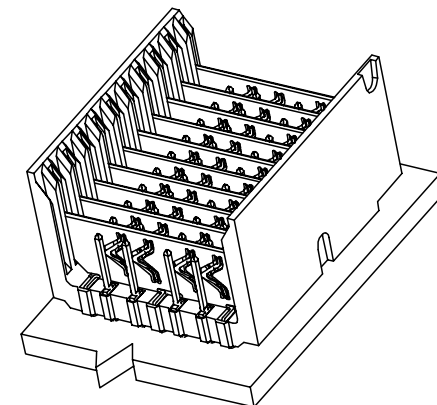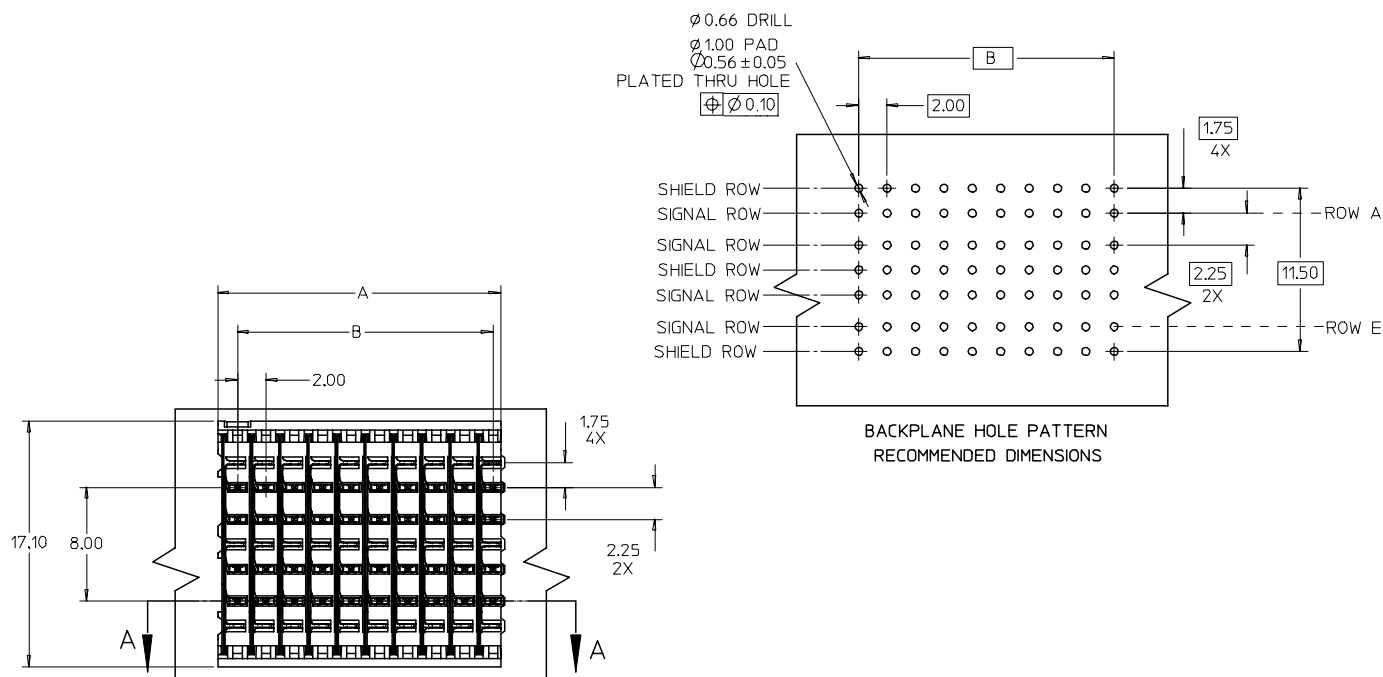

SECTION A-A
ROTATED 180°

NOTES:

1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0. COLOR - BLACK. SIGNAL AND SHIELD - HIGH PERFORMANCE COPPER ALLOY.
2. FINISHES:
CONTACT AREA: SELECTIVE GOLD (Au)
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb) OR SELECTIVE MATTE TIN (Sn) NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-74031-999.
4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY.
5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION REFER TO SHEET 2.
6. PACKAGE PER PK-74057-003 FOR 10 & 25 COLUMN.
PACKAGE PER PK-70873-0934 FOR THE 9 COLUMN CONNECTOR.
7. EITHER MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE LABEL ON TUBE.

ADD LEADFREE PINS EC NO: UCP2006-0067 DRWN: KMULVEY 2005/07/15 CHKD: 2005/07/18 APPR: SREED 2005/08/11	DESCRIPTION	QUALITY SYMBOLS ▽ = 0 ∠ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY		
				mm	INCH	DIMENSION STYLE MM ONLY		TITLE HSD SALES ASSEMBLY 6 ROW OPEN END BACKPLANE			
			4 PLACES	±---	±---	DRAWN BY	DATE	MOLEX MOLEX INCORPORATED			
			3 PLACES	±---	±---	NMARTIN	2002/05/03				
			2 PLACES	±---	±---	CHECKED BY	DATE				
			1 PLACE	±---	±---	SREED	2002/05/03				
			ANGULAR ±---°			APPROVED BY	DATE	MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
			DRAFT WHERE APPLICABLE			CBIXLER	2002/05/03	SEE SHEET 2	SD-74979-010	1 OF 2	
			MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					C

11 10 9 8 7 6 5 4 3 2 1

12 11 10 9 8 7 6 5 4 3 2 74979

J

I

H

G

F

E

D

C

B

A

J

I

H

G

F

E



D

C

B

A

DAUGHTERCARD
CONNECTOR SIDE

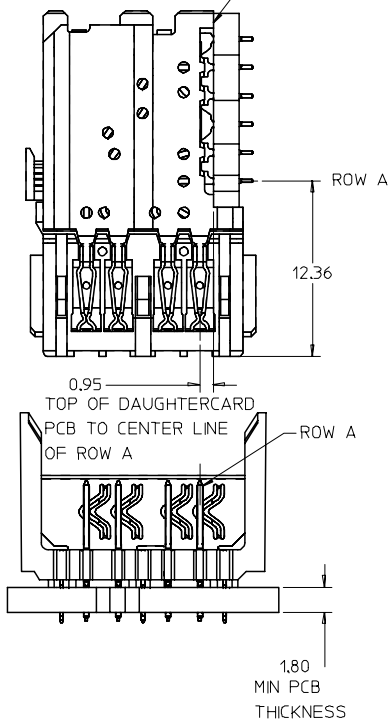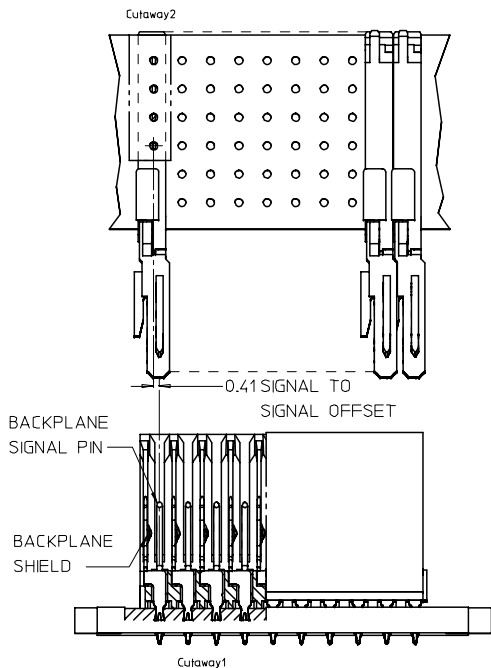

PART NUMBER	COLUMN	NUMBER OF SIGNAL PINS	NUMBER OF SHIELDS	A	B	M	Au (um) MIN THICKNESS	Sn (um) THICKNESS	
74979-x901	9	36	9	18.00	16.00	4.75	0.76	0.76-152	
74979-x906							1.27		
74979-x001	10	40	10	20.00	18.00		0.76		
74979-x006							1.27		
74979-x501	25	100	25	50.00	48.00		0.76		
74979-x506							1.27		
74979-x902	9	36	9	18.00	16.00	6.25	0.76		
74979-x907							1.27		
74979-x002	10	40	10	20.00	18.00		0.76		
74979-x007							1.27		
74979-x502	25	100	25	50.00	48.00		0.76		
74979-x507							1.27		
74979-x903	9	36	9	18.00	16.00	4.25	0.76		
74979-x908							1.27		
74979-x003	10	40	10	20.00	18.00		0.76		
74979-x008							1.27		
74979-x503	25	100	25	50.00	48.00		0.76		
74979-x508							1.27		
74979-x904	9	36	9	18.00	16.00	5.15	0.76		
74979-x909							1.27		
74979-x004	10	40	10	20.00	18.00		0.76		
74979-x009							1.27		
74979-x504	25	100	25	50.00	48.00		0.76		
74979-x509							1.27		

MATERIAL NUMBER ASSIGNMENT

74979-** **

SEE TABLE

NUMBER OF COLUMNS/PLATING

10 = 10 COLUMN TIN/LEAD

25 = 25 COLUMN TIN/LEAD

09 = 9 COLUMN TIN/LEAD

90 = 10 COLUMN MATTE TIN

85 = 25 COLUMN MATTE TIN

99 = 9 COLUMN MATTE TIN

SEE SHEET 1 EC NO: UCP2006-0067 DRWN:KMULVEY 2005/07/15 CHKD: 2005/07/18 APPR: SREED 2005/08/11	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE 4:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION		REVISE ON CAD ONLY					
			mm		INCH		DIMENSION STYLE		TITLE					
			4 PLACES ±---		±---		MM ONLY		HSD SALES ASSEMBLY		6 ROW OPEN END BACKPLANE			
			3 PLACES ±---		±---		DRAWN BY DATE		MOLEX INCORPORATED		MATERIAL NO. DOCUMENT NO. SHEET NO.			
			2 PLACES ±---		±---		NMARTIN 2002/05/03							
			1 PLACE ±---		±---		CHECKED BY DATE							
			ANGULAR ±---°		2002/05/03		SREED		SEE TABLE		SD-74979-010			
			DRAFT WHERE APPLICABLE		APPROVED BY DATE		CBIXLER 2002/05/03		2 OF 2					
			MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
			REV		C									

11 10 9 8 7 6 5 4 3 2 1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.