


# HDSP-70xE

17.3 mm (0.68 inch) General Purpose  
5x7 Dot Matrix Alphanumeric Displays



## Data Sheet

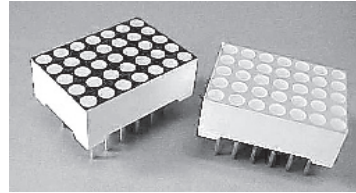

**HDSP-70xE Series, HDSP-71xE Series**  
**HDSP-70xG Series, HDSP-71xG Series**  
**HDSP-70xA Series, HDSP-71xA Series**

### Description

These displays have a 17.3 mm (0.68 inch) character height and use industry standard size and pin-out. The devices are available in either common row anode or common row cathode configurations. The displays come in either gray or black face paint and are available in a choice of high efficiency red (HER) or green colors or AlGaAs.

These parts are subjected to Outgoing Quality Assurance (OQA) inspection with an AQL of 0.065% for functional and visual/cosmetic defects.

For optimal intensity performance, please consider our industrial grade displays:

- HDSP-L20x
- HDSP-540x
- HDSP-L10x

### Features

- **5 x 7 dot matrix font**
- Viewable up to 12 meters
- **X-Y stackable**
- **Industry standard pin-out**  
7.6 mm (0.3 in.) Dual-in-Line (DIP) leads on 2.54 mm (0.1 in.) centers
- **Choice of colors**  
Red or Green or AlGaAs
- **Choice of face paint colors**  
Gray or black
- Design flexibility  
Common row anode or common row cathode
- **Categorized for luminous intensity**
- **Green categorized for color**

### Applications

- Suitable for indoor use
- Not recommended for industrial applications, i.e., operating temperature requirements exceeding 85°C or Below -40°C [1]
- Extreme temperature cycling not recommended [2]




### Devices

HER HDSP-	Green HDSP-	AlGaAs HDSP-	Description
701E	701G	701A	17.3 mm Gray Surface Common Row Anode
703E	703G	703A	17.3 mm Gray Surface Common Row Cathode
711E	711G	711A	17.3 mm Black Surface Common Row Anode
713E	713G	713A	17.3 mm Black Surface Common Row Cathode

#### Notes:


1. For details, please contact your local Avago components sales office or an authorized distributor.

## Package Dimensions

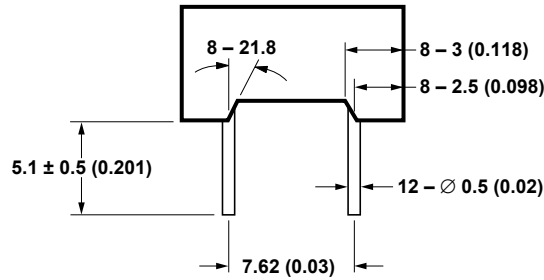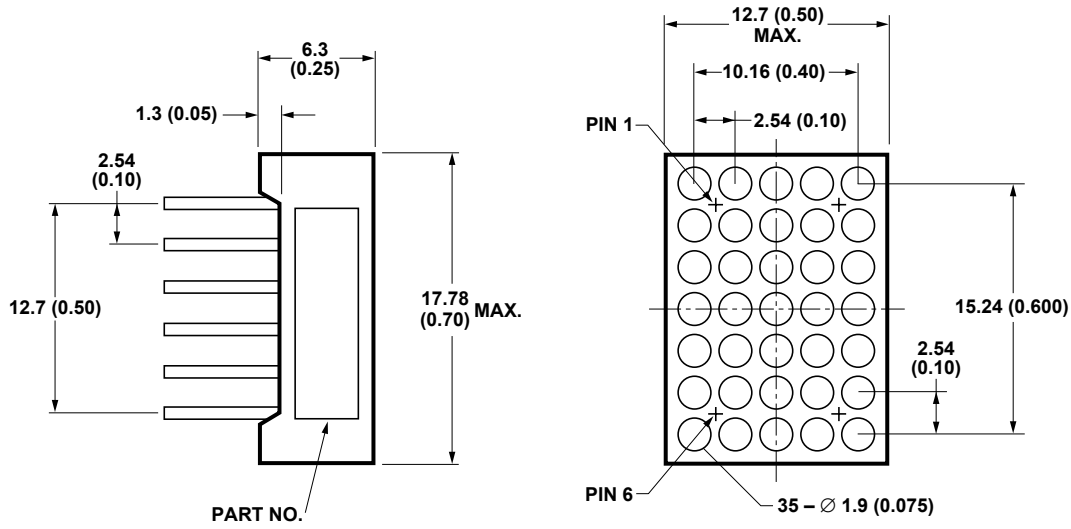

- NOTES:  
 1. ALL DIMENSIONS IN MILLIMETERS (INCHES).  
 2. UNLESS OTHERWISE STATED, TOLERANCE IS  $\pm 0.25$  mm (0.010).  
 3. FOR GREEN ONLY.

## Internal Circuit Diagram

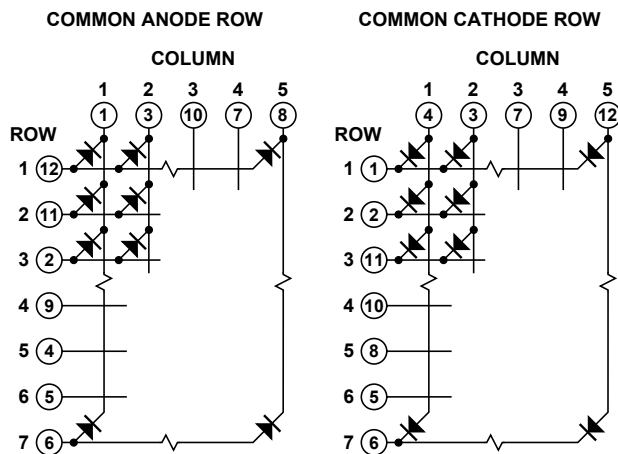

x = ROW OR COLUMN NUMBER, (x) = PIN NUMBER

COMMON ROW ANODE		COMMON ROW CATHODE	
PIN	HDSP-701E/711E/ 701G/711G/701A/711A	PIN	HDSP-703E/713E/ 703G/713G/703A/713A
1	COLUMN 1 CATHODE	1	ROW 1 CATHODE
2	ROW 3 ANODE	2	ROW 2 CATHODE
3	COLUMN 2 CATHODE	3	COLUMN 2 ANODE
4	ROW 5 ANODE	4	COLUMN 1 ANODE
5	ROW 6 ANODE	5	ROW 6 CATHODE
6	ROW 7 ANODE	6	ROW 7 CATHODE
7	COLUMN 4 CATHODE	7	COLUMN 3 ANODE
8	COLUMN 5 CATHODE	8	ROW 5 CATHODE
9	ROW 4 ANODE	9	COLUMN 4 ANODE
10	COLUMN 3 CATHODE	10	ROW 4 CATHODE
11	ROW 2 ANODE	11	ROW 3 CATHODE
12	ROW 1 ANODE	12	COLUMN 5 ANODE

### Absolute Maximum Ratings at T<sub>A</sub> = 25°C

Parameter	HER HDSP-701E/ 711E/703E/ 713E	AlGaAs HDSP-701A/ 703A/711A/ 713A	Green HDSP-701G/ 711G/703G/ 713G	Units
Average Power per Dot <sup>[1]</sup>	75	75	75	mW
Peak Forward Current per Dot <sup>[1,2]</sup> (1/10 Duty Cycle, 0.1 ms Pulse Width)	90	125	90	mA
Average Forward Current per Dot <sup>[1]</sup>	23	23 <sup>[3]</sup>	15 <sup>[2]</sup>	mA
Reverse Voltage per Dot	5	5	5	V
Operating Temperature	-40 to +85	-40 to +85	-40 to +85	°C
Storage Temperature	-40 to +85	-40 to +85	-40 to +85	°C
Wave Soldering Temperature for 3 seconds <sup>[3]</sup> (1.6 mm [0.063 in.] below Body)	250	250	250	°C

Notes:

1. Do not exceed maximum average current per dot.
2. Derate above 35°C at 0.2 mA/°C.
3. Not recommended to be soldered more than 2 times. Minimum interval between solderings is 15 minutes. Total soldering time not to exceed 5 seconds.

### Optical/Electrical Characteristics at T<sub>A</sub> = 25°C

#### High Efficiency Red

Devices HDSP-	Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions	
701E 711E 703E 713E	Luminous Intensity/Dot (Digit Average) <sup>[1]</sup>	I <sub>V</sub>	1.289	2.500		mcd	I <sub>F</sub> = 50 mA, 20% Duty Factor	
	Peak Wavelength	λ <sub>PEAK</sub>		632		nm	I <sub>F</sub> = 20 mA	
	Dominant Wavelength <sup>[2]</sup>	λ <sub>d</sub>		622		nm	I <sub>F</sub> = 20 mA	
	Forward Voltage	V <sub>F</sub>			3.40		V	I <sub>F</sub> = 50 mA
					2.05	2.50		I <sub>F</sub> = 20 mA
			1.60					I <sub>F</sub> = 5 mA
Reverse Voltage <sup>[3]</sup> V <sub>R</sub>	5				V	I <sub>R</sub> = 100 μA		
Luminous Intensity Matching Ratio	I <sub>V-M</sub>			2:1		I <sub>F</sub> = 50 mA 20% Duty Factor		

**Optical/Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , continued**

**Green**

<b>Devices HDSP-</b>	<b>Parameter</b>	<b>Symbol</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Units</b>	<b>Test Conditions</b>
701G 711G 703G 713G	Luminous Intensity/Dot (Digit Average) <sup>[1]</sup>	$I_V$	0.96	2.50		mcd	$I_F = 50\text{ mA}$ , 20% Duty Factor
	Peak Wavelength	$\lambda_{PEAK}$		568		nm	$I_F = 20\text{ mA}$
	Dominant Wavelength <sup>[2]</sup>	$\lambda_d$		573		nm	$I_F = 20\text{ mA}$
	Forward Voltage	$V_F$			3.40	V	$I_F = 50\text{ mA}$
			1.80	2.25	2.60		$I_F = 20\text{ mA}$
			1.60				$I_F = 5\text{ mA}$
	Reverse Voltage <sup>[3]</sup> $V_R$	5				V	$I_R = 100\ \mu\text{A}$
Luminous Intensity Matching Ratio	$I_{V-M}$			2:1		$I_F = 50\text{ mA}$ 20% Duty Factor	

**AlGaAs**

<b>Devices HDSP-</b>	<b>Parameter</b>	<b>Symbol</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Units</b>	<b>Test Conditions</b>	
701A 711A 703A 713A	Luminous Intensity/Dot (Digit Average) <sup>[1]</sup>	$I_V$	1.55	2.10		mcd	$I_F = 10\text{ mA}$ , 20% Duty Factor	
	Peak Wavelength	$\lambda_{PEAK}$		660		nm	$I_F = 20\text{ mA}$	
	Dominant Wavelength <sup>[2]</sup>	$\lambda_d$		643		nm	$I_F = 20\text{ mA}$	
	Forward Voltage	$V_F$			1.8	2.0	V	$I_F = 20\text{ mA}$
						2.0		$I_F = 10\text{ mA}$
			1.5					$I_F = 5\text{ mA}$
	Reverse Voltage <sup>[3]</sup> $V_R$	5				V	$I_R = 100\ \mu\text{A}$	
Luminous Intensity Matching Ratio	$I_{V-M}$			1.5:1		$I_F = 10\text{ mA}$ 20% Duty Factor		

Notes:

1. The digits are categorized for luminous intensity. The intensity category is designated by a letter on the side of the package.
2. The dominant wavelength,  $\lambda_d$ , is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
3. Typical specification for reference only. Do not exceed absolute maximum ratings.

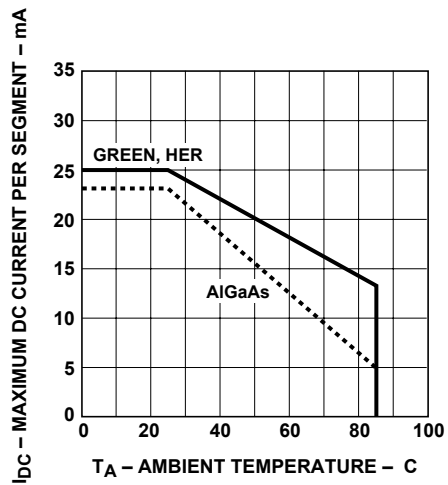


Figure 1. Maximum Allowable Average Current Per Dot vs. Ambient Temperature.

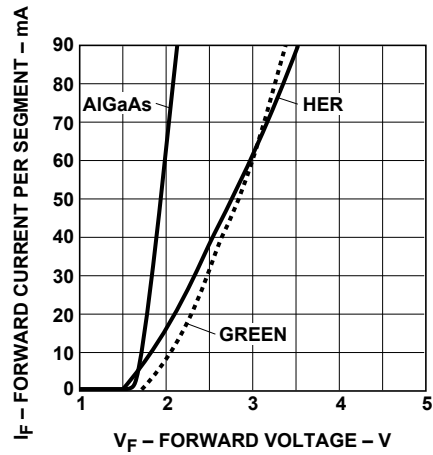


Figure 2. Forward Current vs. Forward Voltage.

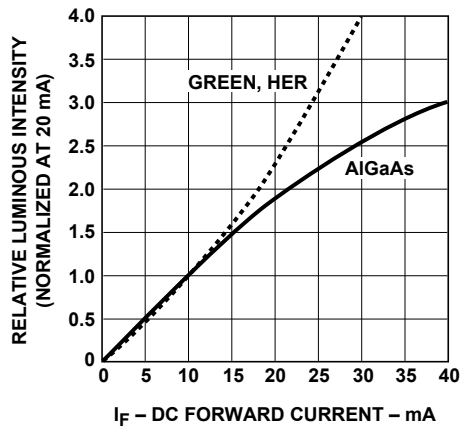


Figure 3. Relative Luminous Intensity vs. DC Forward Current.

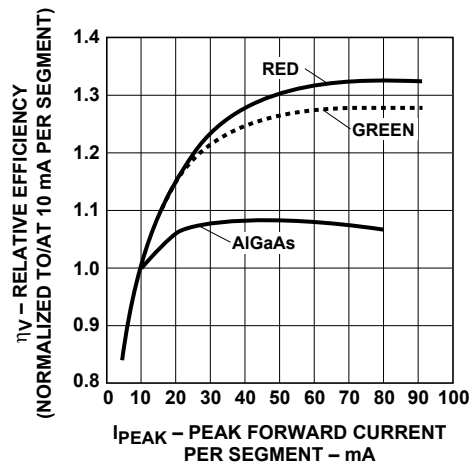


Figure 4. Relative Efficiency (Luminous Intensity Per Unit Current Per Dot) vs. Peak Current Per Dot.

**Intensity Bin Limits<sup>[1]</sup>**  
**(mcd at 50 mA, 20% Duty Factor)**

**High Efficiency Red**

Bin name	Min. <sup>[2]</sup>	Max. <sup>[2]</sup>
E	1.289	1.934
F	1.934	2.900
G	2.900	4.350
H	4.350	6.525

**Green**

Bin name	Min. <sup>[2]</sup>	Max. <sup>[2]</sup>
H	0.96	1.44
I	1.44	2.15
J	2.15	3.23
K	3.23	4.85
L	4.85	7.28

Notes:

- Bin categories are established for classification of products. Products may not be available in all bin categories.
- Tolerance for each intensity bin limit is  $\pm 10\%$ .

**(mcd at 10 mA, 20% Duty Factor)**

**AlGaAs**

Bin name	Min. <sup>[2]</sup>	Max. <sup>[2]</sup>
I	1.55	2.33
J	2.33	3.49

Notes:

- Bin categories are established for classification of products. Products may not be available in all bin categories.
- Tolerance for each intensity bin limit is  $\pm 10\%$ .

**Color Bin Limits (Dominant Wavelength)**

Color	Bin	Dominant Wavelength (nm)	
		Min.	Max.
Green	2	573.6	576.5
	3	570.6	573.5
	4	567.6	570.5
	5	564.5	567.5

Note:

All categories are established for classification of products. Products may not be available in all categories. Please contact your local Avago representatives for further clarification/information.

**Contrast Enhancement**

For information on contrast enhancement, please see Application Note 1015.

**Soldering/Cleaning**

Cleaning agents from the ketone family (acetone, methyl ethyl ketone, etc.) and from the chlorinated hydrocarbon family (methylene chloride, trichloro-ethylene, carbon tetrachloride, etc.) are not recommended for cleaning LED parts. All of these various solvents attack or dissolve the encapsulating epoxies used to form the package of plastic LED parts.

For information on soldering LEDs, please refer to Application Note 1027.

**Device Reliability**

For reliability information, please see the reliability datasheet

*17.3 mm General Purpose*

*5 x 7 Dot Matrix Alphanumeric Displays.*

For product information and a complete list of distributors, please go to our website: [www.avagotech.com](http://www.avagotech.com)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.