

Passive module - VIP-2/PT/FLK10/ROC DO - 2905317

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE Professional (VIP) board for the ROC800 controller

Product Features

- These system-specific interface modules for the ROC800 controller are used in combination with the relevant system cables
- Interface from field wiring to ROC800 controller
- Compact design reduces space requirements in the control cabinet
- Field side I/O marking clearly identified when device is mounted.
- Integrated ZB marker provides per-channel labeling
- Rugged metal mounting foot allows easy DIN rail installation and removal.



Key Commercial Data

| | |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 100.0 g |
| Country of origin | United States |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 36.8 mm |
| Height | 72.1 mm |
| Depth | 46.6 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

General

Passive module - VIP-2/PT/FLK10/ROC DO - 2905317

Technical data

General

| | |
|---------------------------------|--------------|
| Max. perm. operating voltage | 60 V AC/DC |
| Max. perm. current (per branch) | 1 A |
| Number of positions | 10 |
| Status display | No |
| Mounting position | any |
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |
| | IEC 62103 |
| Degree of pollution | 2 |
| Overvoltage category | II |

Connection data for connection 1

| | |
|----------------------------------|--|
| Connection name | Field level |
| Connection in acc. with standard | IEC / EN |
| Connection method | Push-in connection |
| Stripping length | 8 mm |
| Conductor cross section solid | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.14 mm ² ... 2.5 mm ² |
| Conductor cross section AWG | 26 ... 14 |
| Number of positions | 10 |

Connection data for connection 2

| | |
|-----------------------|-----------------------------|
| Connection name | Controller level |
| Connection method | IDC/FLK pin strip (2.54 mm) |
| Number of connections | 1 |
| Number of positions | 10 |
| Pitch | 2.54 mm |

Supported controller

| | |
|---------------------|----------------|
| Controller | Emerson ROC800 |
| - suitable I/O card | ROC800 DO |

Standards and Regulations

| | |
|-----------------------|--------------|
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |
| | IEC 62103 |
| Degree of pollution | 2 |
| Overvoltage category | II |

Passive module - VIP-2/PT/FLK10/ROC DO - 2905317

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27242608 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001434 |
| ETIM 3.0 | EC001604 |
| ETIM 4.0 | EC001604 |
| ETIM 5.0 | EC002780 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11 | 39121421 |
| UNSPSC 12.01 | 39121421 |
| UNSPSC 13.2 | 39121421 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

Passive module - VIP-2/PT/FLK10/ROC DO - 2905317

Approvals

| | |
|--------------------------------|-------|
| UL Recognized | |
| mm ² /AWG/kcmil | 26-14 |
| Nominal current I _N | 1 A |
| Nominal voltage U _N | 60 V |

| | |
|--------------------------------|-------|
| cUL Recognized | |
| mm ² /AWG/kcmil | 26-14 |
| Nominal current I _N | 1 A |
| Nominal voltage U _N | 60 V |

| | |
|------------------|--|
| cULus Recognized | |
|------------------|--|

Accessories

Accessories

System cable

Cable - VIP-CAB-FLK10/0,14/0,5M - 2318305



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m

Cable - VIP-CAB-FLK10/0,14/1,0M - 2318318



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m

Passive module - VIP-2/PT/FLK10/ROC DO - 2905317

Accessories

Cable - VIP-CAB-FLK10/0,14/1,5M - 2318321



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m

Cable - VIP-CAB-FLK10/0,14/2,0M - 2318334



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m

Cable - VIP-CAB-FLK10/0,14/3,0M - 2318347



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m

Cable - VIP-CAB-FLK10/0,14/4,0M - 2318350



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m

Cable - VIP-CAB-FLK10/0,14/6,0M - 2318363



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m

Required add-on products

Passive module - VIP-2/PT/FLK10/ROC DO - 2905317

Accessories


Front adapters - FLKM 10-PA-ROC800 - 2904889



VARIOFACE front adapters for ROC800 controller

Drawings

Circuit diagram

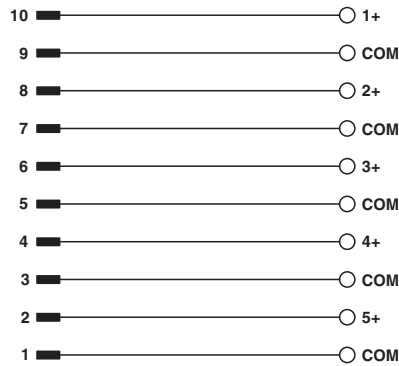

Connection scheme VIP-2/.../FLK50 (1-40) /S7



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.