

## S1D13505 Embedded RAMDAC LCD/CRT Controller

February 2009

### ■ DESCRIPTION

The S1D13505 is a color/monochrome LCD/CRT graphics controller interfacing to a wide range of CPUs and display devices. The S1D13505 architecture is designed to meet the low cost, low power requirements of the embedded markets, such as Mobile Communications, Hand-Held PCs, and Office Automation.

The S1D13505 supports multiple CPUs, all LCD panel types, CRT, and additionally provides a number of differentiating features. Products requiring a "Portrait" mode display can take advantage of the SwivelView feature. Simultaneous, Virtual and Split Screen Display are just some of the display modes supported, while the Hardware Cursor, Ink Layer, and the Memory Enhancement Registers offer substantial performance benefits. These features, combined with the S1D13505's Operating System independence, make it an ideal display solution for a wide variety of applications.

### ■ FEATURES

#### Memory Interface

- 16-bit EDO-DRAM or FPM-DRAM interface.
- Memory size options:  
512K bytes using one 256K×16 device.  
2M bytes using one 1M×16 device.
- Addressable as a single linear address space.

#### CPU Interface

- Supports the following interfaces:  
Hitachi SH-4.  
Hitachi SH-3.  
Motorola M68K.  
Philips MIPS PR31500/PR31700.  
Toshiba MIPS TX3912.  
Motorola Power PC MPC821.  
NEC MIPS VR4102/VR4111.  
Epson E0C33.  
PC Card (PCMCIA).  
StrongARM (PC Card).  
ISA bus.  
MPU bus interface with programmable READY.
- CPU write buffer.

#### Display Support

- 4/8-bit monochrome passive LCD interface.
- 4/8/16-bit color passive LCD interface.
- Single-panel, single-drive displays.
- Dual-panel, dual-drive displays.
- Direct support for 9/12-bit TFT/D-TFD; 18-bit TFT/D-TFD is supported up to 64K color depth (16-bit data).
- Embedded RAMDAC with direct analog CRT drive.
- Simultaneous display of CRT and passive or TFT/D-TFD panels.
- Maximum resolution of 800x600 pixels at a color depth of 16 bpp.

#### Display Modes

- 1/2/4/8/16 bit-per-pixel (bpp) support on LCD/CRT.
- Up to 16 shades of gray using FRM on monochrome passive LCD panels.
- Up to 4096 colors on passive LCD panels.
- Up to 64K colors on active matrix TFT/D-TFD LCD panels and CRT in 16 bpp modes.
- Split Screen Display: allows two different images to be simultaneously viewed on the same display.
- Virtual Display Support: displays images larger than the display size through the use of panning.
- Double Buffering/multi-pages: provides smooth animation and instantaneous screen update.
- SwivelView: direct hardware 90° rotation of display image for portrait mode display.
- Acceleration of screen updates by allocating full display memory bandwidth to CPU.
- Hardware 64x64 pixel 2-bit cursor or full screen 2-bit ink layer.



#### Clock Source

- Single clock input for both pixel and memory clocks.
- Memory clock can be input clock or (input clock/2), providing flexibility to use CPU bus clock as input.
- Pixel clock can be memory clock or (memory clock/2) or (memory clock/3) or (memory clock/4).

#### Power Down Modes

- Software power save mode.
- LCD power sequencing.

#### General Purpose IO Pins

- Up to 3 General Purpose IO pins are available.


#### Operating Voltage

- 2.7 volts to 5.5 volts.

#### Package

- 128-pin QFP15 surface mount package.

### ■ SYSTEM BLOCK DIAGRAM

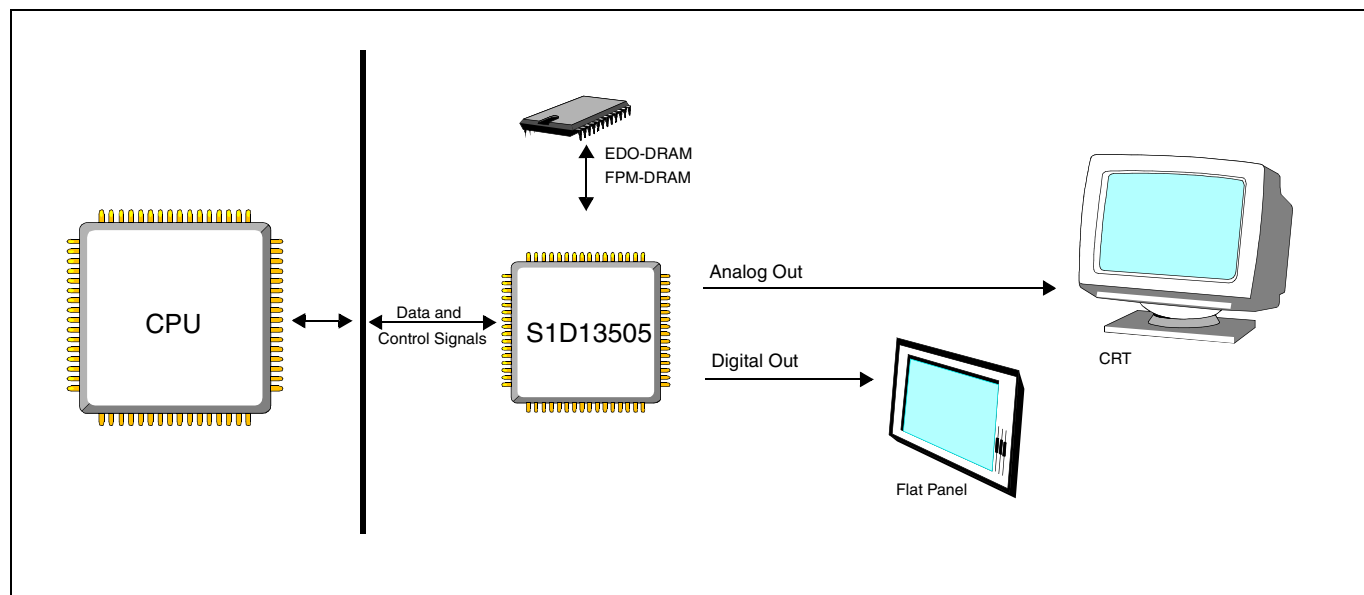

### CONTACT YOUR SALES REPRESENTATIVE FOR THESE COMPREHENSIVE DESIGN TOOLS

- S1D13505 Technical Manual
- S5U13505 Evaluation Boards
- CPU Independent Software Utilities
- Linux Console Driver
- Windows® CE Display Driver
- VXWorks® Tornado™ Display Driver

#### Japan

Seiko Epson Corporation  
IC International Sales Group  
421-8, Hino, Hino-shi  
Tokyo 191-8501, Japan  
Tel: +81-42-587-5814  
Fax: +81-42-587-5117

#### North America

Epson Electronics America, Inc.  
2580 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: +1-800-228-3964  
Fax: +1-408-922-0238

#### China

Epson (China) Co., Ltd.  
7F, Jinbao Bldg.  
No. 89 Jinbao St.  
Dongcheng District  
Beijing 100005, China  
Tel: +86-10-6410-6555  
Fax: +86-10-6410-7320

#### Taiwan

Epson Taiwan Technology & Trading Ltd.  
14F, No. 7  
Song Ren Road  
Taipei 110, Taiwan  
Tel: +886-2-8786-6688  
Fax: +886-2-8786-6660

#### Hong Kong

Epson Hong Kong Ltd.  
20/F, Harbour Centre  
25 Harbour Road  
Wanchai, Hong Kong  
Tel: +852-2585-4600  
Fax: +852-2827-4346

#### Europe

Epson Europe Electronics GmbH  
Riesstrasse 15  
80992 Munich, Germany  
Tel: +49-89-14005-0  
Fax: +49-89-14005-110

#### Singapore

Epson Singapore Pte., Ltd.  
1 HarbourFront Place  
#03-02 HarbourFront Tower One  
Singapore 098633  
Tel: +65-6586-5500  
Fax: +65-6271-3182

#### Korea

Seiko Epson Corp.  
Korea Office  
50F, LKI 63 Bldg.  
60 Yoido-dong, Youngdeungpo-Ku,  
Seoul, 150-763, Korea  
Tel: +82-2-784-6027  
Fax: +82-2-767-3677

© SEIKO EPSON CORPORATION 2001-2009. All rights reserved.

Information in this document is subject to change without notice. You may download and use this document, but only for your own use in evaluating Seiko Epson/EPSON products. You may not modify the document. Epson Research and Development, Inc. disclaims any representation that the contents of this document are accurate or current. The Programs/Technologies described in this document may contain material protected under U.S. and/or International Patent laws. EPSON is a registered trademark of Seiko Epson Corporation. Microsoft, Windows, and the Windows Embedded Partner Logo are registered trademarks of Microsoft Corporation. All other trademarks are the property of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.