

Metallized Polyester (PET) Capacitors in PCM 2.5 mm. Capacitances from 3300 pF to 1.0 μF. Rated Voltages from 63 VDC to 400 VDC.

Special Features

- High volume/capacitance ratio and reduced base
- PCM 2.5 mm
- Self-healing
- According to RoHS 2011/65/EU

Typical Applications

For general DC-applications e.g.

- By-pass
- Blocking
- Coupling and decoupling
- Timing

Construction


Dielectric:

Polyethylene-terephthalate (PET) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

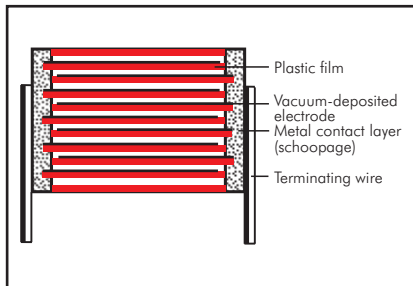

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Silver.

Electrical Data

Capacitance range:

3300 pF to 1.0 μF (E12-values on request)

Rated voltages:

63 VDC, 100 VDC, 250 VDC, 400 VDC

Capacitance tolerances:

±20%, ±10% (±5% available subject to special enquiry)

Operating temperature range:

-55° C to +100° C

Test specifications:

In accordance with IEC 60384-2

Climatic test category:

55/100/21 in accordance with IEC

Insulation resistance at +20° C:

| U_r | U_{test} | $C \leq 0.33 \mu F$ | $0.33 \mu F < C \leq 1.0 \mu F$ |
|------------------------|------------|---------------------------------|--|
| 63 VDC | 50 V | $\geq 3.75 \times 10^3 M\Omega$ | $\geq 1250 \text{ sec} (M\Omega \times \mu F)$ |
| $\geq 100 \text{ VDC}$ | 100 V | $\geq 1 \times 10^4 M\Omega$ | - |

Measuring time: 1 min.

Test voltage: $1.6 U_r$, 2 sec.

Maximum pulse rise time:

| Capacitance pF/μF | Pulse rise time V/μsec max. operation/test |
|-------------------|--|
| 3300 ... 6800 | 100 / 1000 |
| 0.01 ... 0.022 | 50 / 500 |
| 0.033 ... 0.068 | 30 / 300 |
| 0.1 ... 0.33 | 20 / 200 |
| 0.47 ... 1.0 | 15 / 150 |

for pulses equal to the rated voltage

Dissipation factors at +20° C: $\tan \delta$

| at f | $C \leq 0.1 \mu F$ | $0.1 \mu F < C \leq 1.0 \mu F$ |
|---------|--------------------------|--------------------------------|
| 1 kHz | $\leq 8 \times 10^{-3}$ | $\leq 8 \times 10^{-3}$ |
| 10 kHz | $\leq 15 \times 10^{-3}$ | $\leq 15 \times 10^{-3}$ |
| 100 kHz | $\leq 30 \times 10^{-3}$ | - |

Voltage derating:

A voltage derating factor of 1.25 % per K must be applied from +85° C for DC voltages and from +75° C for AC voltages.

Reliability:

Operational life > 300 000 hours

Failure rate < 2 fit ($0.5 \times U_r$ and 40° C)

Mechanical Tests

Pull test on pins:

10 N in direction of pins according to IEC 60068-2-21

Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

Low air density:

1kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec² in accordance with IEC 60068-2-29

Packing

Available taped and reeled.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

| Capacitance | 63 VDC/40 VAC* | | | | | 100 VDC/63 VAC* | | | | |
|--------------------|----------------|-----|-----|------------|-----------------|-----------------|-----|-----|------------|-----------------|
| | W | H | L | PCM** | Part number | W | H | L | PCM** | Part number |
| 0.01 μF | 2.5 | 7 | 4.6 | 2.5 | MKSOC021000B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOD021000B00_ |
| 0.015 " | 2.5 | 7 | 4.6 | 2.5 | MKSOC021500B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOD021500B00_ |
| 0.022 " | 2.5 | 7 | 4.6 | 2.5 | MKSOC022200B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOD022200B00_ |
| 0.033 " | 2.5 | 7 | 4.6 | 2.5 | MKSOC023300B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOD023300B00_ |
| 0.047 " | 2.5 | 7 | 4.6 | 2.5 | MKSOC024700B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOD024700B00_ |
| 0.068 " | 2.5 | 7 | 4.6 | 2.5 | MKSOC026800B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOD026800B00_ |
| 0.1 μF | 3 | 7.5 | 4.6 | 2.5 | MKSOC031000C00_ | 3 | 7.5 | 4.6 | 2.5 | MKSOD031000C00_ |
| 0.15 " | 3 | 7.5 | 4.6 | 2.5 | MKSOC031500C00_ | 3.8 | 8.5 | 4.6 | 2.5 | MKSOD031500D00_ |
| 0.22 " | 3 | 7.5 | 4.6 | 2.5 | MKSOC032200C00_ | 4.6 | 9 | 4.6 | 2.5 | MKSOD032200E00_ |
| 0.33 " | 3.8 | 8.5 | 4.6 | 2.5 | MKSOC033300D00_ | 5.5 | 10 | 4.6 | 2.5 | MKSOD033300F00_ |
| 0.47 " | 4.6 | 9 | 4.6 | 2.5 | MKSOC034700E00_ | | | | | |
| 0.68 " | 5.5 | 10 | 4.6 | 2.5 | MKSOC036800F00_ | | | | | |
| 1.0 μF | 5.5 | 10 | 4.6 | 2.5 | MKSOC041000F00_ | | | | | |

| Capacitance | 250 VDC/160 VAC* | | | | | 400 VDC/200 VAC* | | | | |
|--------------------|------------------|-----|-----|------------|-----------------|------------------|-----|-----|------------|-----------------|
| | W | H | L | PCM** | Part number | W | H | L | PCM** | Part number |
| 3300 pF | 2.5 | 7 | 4.6 | 2.5 | MKSOF013300B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOG013300B00_ |
| 4700 " | 2.5 | 7 | 4.6 | 2.5 | MKSOF014700B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOG014700B00_ |
| 6800 " | 2.5 | 7 | 4.6 | 2.5 | MKSOF016800B00_ | 2.5 | 7 | 4.6 | 2.5 | MKSOG016800B00_ |
| 0.01 μF | 2.5 | 7 | 4.6 | 2.5 | MKSOF021000B00_ | 3 | 7.5 | 4.6 | 2.5 | MKSOG021000C00_ |
| 0.015 " | 2.5 | 7 | 4.6 | 2.5 | MKSOF021500B00_ | 3.8 | 8.5 | 4.6 | 2.5 | MKSOG021500D00_ |
| 0.022 " | 2.5 | 7 | 4.6 | 2.5 | MKSOF022200B00_ | 4.6 | 9 | 4.6 | 2.5 | MKSOG022200E00_ |
| 0.033 " | 3 | 7.5 | 4.6 | 2.5 | MKSOF023300C00_ | 5.5 | 10 | 4.6 | 2.5 | MKSOG023300F00_ |
| 0.047 " | 3.8 | 8.5 | 4.6 | 2.5 | MKSOF024700D00_ | 5.5 | 10 | 4.6 | 2.5 | MKSOG024700F00_ |
| 0.068 " | 4.6 | 9 | 4.6 | 2.5 | MKSOF026800E00_ | | | | | |
| 0.1 μF | 5.5 | 10 | 4.6 | 2.5 | MKSOF031000F00_ | | | | | |

* AC voltage: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$


New range and value

** PCM = Printed circuit module = pin spacing

Dims. in mm.



| Part number completion: | |
|-----------------------------|----------|
| Tolerance: | 20 % = M |
| | 10 % = K |
| | 5 % = J |
| Packing: | bulk = S |
| Pin length: | 6-2 = SD |
| Taped version see page 149. | |

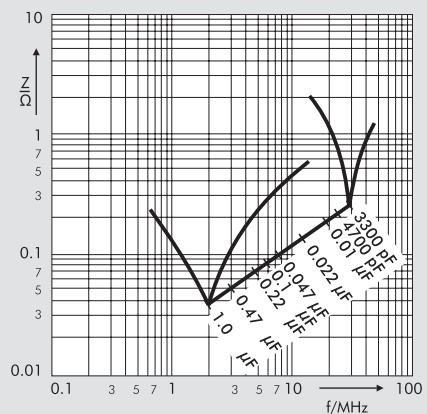

Impedance change with frequency (general guide).

Rights reserved to amend design data without prior notification.

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{max.} \leq 125^{\circ}C$
 soldering: $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating: $T_{max.} \leq 100^{\circ}C$
 soldering: $T_{max.} \leq 110^{\circ}C$


Single wave soldering

Soldering bath temperature: $T < 260^{\circ}C$
 Dwell time: $t < 5 \text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}C$
 Dwell time: $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

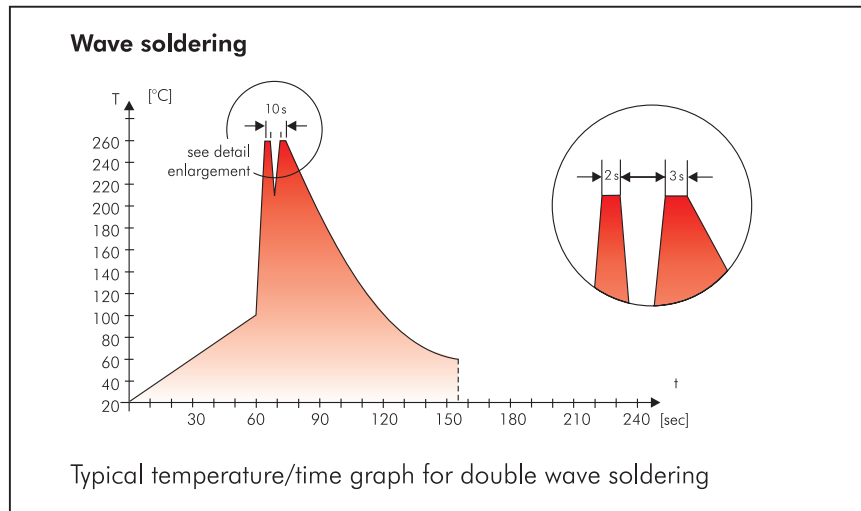

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration



Diagram 1:
PCM 2.5/5/7.5mm

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

| Designation | Symbol | Dimensions for Radial Taping | | | | | | |
|--|-----------------------|--|--|---|---|---|---|---|
| | | PCM 2.5 taping | PCM 5 taping | PCM 7.5 taping | PCM 10 taping* | PCM 15 taping* | PCM 22.5 taping | PCM 27.5 taping |
| Carrier tape width | W | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 |
| Hold-down tape width | W ₀ | 6.0 for hot-sealing adhesive tape | 6.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape |
| Hole position | W ₁ | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 |
| Hold-down tape position | W ₂ | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. |
| Feed hole diameter | D ₀ | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 |
| Pitch of component | P | 12.7 ±1.0 | 12.7 ±1.0 | 12.7 ±1.0 | 25.4 ±1.0 | 25.4 ±1.0 | 38.1 ±1.5 | 38.1 ±1.5 or 50.8 ±1.5 |
| Feed hole pitch | P ₀ | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch |
| Feed hole centre to pin | P ₁ | 5.1 ±0.5 | 3.85 ±0.7 | 2.6 ±0.7 | 7.7 ±0.7 | 5.2 ±0.7 | 7.8 ±0.7 | 5.3 ±0.7 |
| Hole centre to component centre | P ₂ | 6.35 ±1.3 | 6.35 ±1.3 | 6.35 ±1.3 | 12.7 ±1.3 | 12.7 ±1.3 | 19.05 ±1.3 | 19.05 ±1.3 |
| Feed hole centre to bottom edge of the component | H | 16.5 ±0.3 18.5 ±0.5 | 16.5 ±0.3 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 |
| Feed hole centre to top edge of the component | H ₁ | H+H _{component} < H ₁ 32.25 max. | H+H _{component} < H ₁ 32.25 max. | H+H _{component} < H ₁ 24.5 to 31.5 | H+H _{component} < H ₁ 25.0 to 31.5 | H+H _{component} < H ₁ 26.0 to 37.0 | H+H _{component} < H ₁ 30.0 to 43.0 | H+H _{component} < H ₁ 35.0 to 45.0 |
| Pin spacing at upper edge of carrier tape | F | 2.5 ±0.5 | 5.0 ^{+0.8} _{-0.2} | 7.5 ±0.8 | 10.0 ±0.8 | 15 ±0.8 | 22.5 ±0.8 | 27.5 ±0.8 |
| Pin diameter | d | 0.4 ±0.05 | 0.5 ±0.05 | 0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05} | 0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05} | 0.8 ^{+0.08} _{-0.05} | 0.8 ^{+0.08} _{-0.05} | 0.8 ^{+0.08} _{-0.05} |
| Component alignment | Δh | ± 2.0 max. | ± 2.0 max. | ± 3.0 max. | ± 3.0 max. | ± 3.0 max. | ± 3.0 max. | ± 3.0 max. |
| Total tape thickness | t | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 |
| Package (see also page 150) | ROLL/AMMO | | | AMMO | | | | |
| | REEL | ϕ 360 max. ϕ 30 ±1 | B 52 ±2 B 58 ±2 } depending on comp. dimensions | REEL ϕ 360 max. ϕ 30 ±1 | B 52 ±2 B 58 ±2 or B 66 ±2 | REEL ϕ 500 max. ϕ 25 ±1 | B 54 ±2 B 60 ±2 B 68 ±2 } depending on PCM and component dimensions | |
| Unit | see details page 151. | | | | | | | |

Dims in mm.

* Diameter of pins see General Data.


* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

Types of Tape Packaging of Capacitors for Automatic Radial Insertion

■ ROLL Packaging

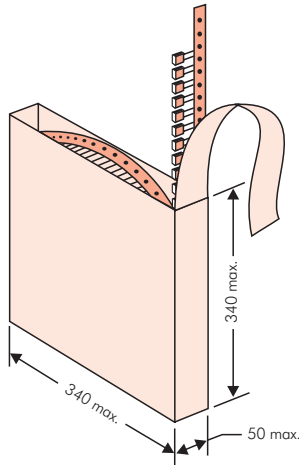

■ AMMO Packaging

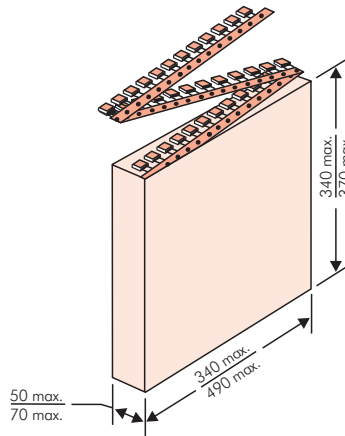

■ REEL Packaging



BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

| | | |
|---|---|--------------------------|
| WIMA Best Capacitors Made In Germany | | Werk Unna |
| Supplier-ID: 123456789 | RoHS 2011/65/EU | Date Code: 08.10.10 |
| | | |
| Purchase Order No. (P/O): Bestellung xyz | | Quantity: 5.000 |
| | | |
| Customer Part No.: KUNDETEILENUMMER | | Customer No.: 0000100002 |
| | | Gross Weight [g]: 1870 |
| WIMA Confirmation No.: 0001004053000100 | WIMA Part No.: MKS2C034701C00K8SD | |
| | | |
| Handling Unit: MKS 2 | QTY: 5.000 | COO: DE |
| | MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RM5 | |
| 1000067326 | Standard 10% Loss - Standard | Drühte 6-2 |
| | Vorlage Debitor Inland | Week 03/2011 |

BARCODE „Code 39“

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



| PCM | Size | | | | bulk | pcs. per packing unit | | | | | | | | |
|----------------|------|------|-----------|-----------|------|-----------------------|-------|-------|-------|-------|-----------|-----------|------|---|
| | | | | | | ROLL | | REEL | | | | AMMO | | |
| | W | H | L | Codes | | S | H16.5 | H18.5 | ø 360 | ø 500 | 340 x 340 | 490 x 370 | | |
| | | | | | N | O | F | I | H | J | A | C | B | D |
| 2.5 mm | 2.5 | 7 | 4.6 | 0B | 5000 | | 2200 | 2500 | | | 2800 | | | |
| | 3 | 7.5 | 4.6 | 0C | 5000 | | 2000 | 2300 | | | 2300 | | | |
| | 3.8 | 8.5 | 4.6 | 0D | 5000 | | 1500 | 1800 | | | 1800 | | | |
| | 4.6 | 9 | 4.6 | 0E | 5000 | | 1200 | 1500 | | | 1500 | | | |
| | 5.5 | 10 | 4.6 | 0F | 5000 | | 900 | 1200 | | | 1200 | | | |
| 5 mm | 2.5 | 6.5 | 7.2 | 1A | 5000 | | 2200 | 2500 | | | 2800 | | | |
| | 3 | 7.5 | 7.2 | 1B | 5000 | | 2000 | 2300 | | | 2300 | | | |
| | 3.5 | 8.5 | 7.2 | 1C | 5000 | | 1600 | 2000 | | | 2000 | | | |
| | 4.5 | 6 | 7.2 | 1D | 6000 | | 1300 | 1500 | | | 1500 | | | |
| | 4.5 | 9.5 | 7.2 | 1E | 4000 | | 1300 | 1500 | | | 1500 | | | |
| | 5 | 10 | 7.2 | 1F | 3500 | | 1100 | 1400 | | | 1400 | | | |
| | 5.5 | 7 | 7.2 | 1G | 4000 | | 1000 | 1200 | | | 1200 | | | |
| | 5.5 | 11.5 | 7.2 | 1H | 2500 | | 1000 | 1200 | | | 1200 | | | |
| | 6.5 | 8 | 7.2 | 1I | 2500 | | 800 | 1000 | | | 1000 | | | |
| | 7.2 | 8.5 | 7.2 | 1J | 2500 | | 700 | 1000 | | | 1000 | | | |
| | 7.2 | 13 | 7.2 | 1K | 2000 | | 700 | 950 | | | 1000 | | | |
| | 8.5 | 10 | 7.2 | 1L | 2000 | | 600 | 800 | | | 800 | | | |
| 8.5 | 14 | 7.2 | 1M | 1500 | | 600 | 800 | | | 800 | | | | |
| 11 | 16 | 7.2 | 1N | 1000 | | 500 | 600 | | | 640 | | | | |
| 7.5 mm | 2.5 | 7 | 10 | 2A | 5000 | | | 2500 | 4400 | | 2500 | | | |
| | 3 | 8.5 | 10 | 2B | 5000 | | | 2200 | 4300 | | 2300 | | 4150 | |
| | 4 | 9 | 10 | 2C | 4000 | | | 1700 | 3200 | | 1700 | | 3100 | |
| | 4.5 | 9.5 | 10.3 | 2D | 3500 | | | 1500 | 2900 | | 1400 | | 2700 | |
| | 5 | 10.5 | 10.3 | 2E | 3000 | | | 1300 | 2500 | | 1300 | | | |
| | 5.7 | 12.5 | 10.3 | 2F | 2000 | | | 1000 | 2200 | | 1100 | | | |
| | 7.2 | 12.5 | 10.3 | 2G | 1500 | | | 900 | 1800 | | 1000 | | | |
| 10 mm | 3 | 9 | 13 | 3A | 3000 | | | 1100 | 2200 | | | | 1900 | |
| | 4 | 8.5 | 13.5 | FA | 3000 | | | 900 | 1600 | | | | 1450 | |
| | 4 | 9 | 13 | 3C | 3000 | | | 900 | 1600 | | | | 1450 | |
| | 4 | 9.5 | 13 | 3D | 3000 | | | 900 | 1600 | | | | 1400 | |
| | 5 | 10 | 13.5 | FB | 2000 | | | 700 | 1300 | | | | 1200 | |
| | 5 | 11 | 13 | 3F | 3000 | | | 700 | 1300 | | | | 1200 | |
| | 6 | 12 | 13 | 3G | 2400 | | | 550 | 1100 | | | | 1000 | |
| | 6 | 12.5 | 13 | 3H | 2400 | | | 550 | 1100 | | | | 1000 | |
| 8 | 12 | 13 | 3I | 2000 | | | 400 | 800 | | | | 740 | | |
| 15 mm | 5 | 11 | 18 | 4B | 2400 | | | 600 | 1200 | | | | 1150 | |
| | 5 | 13 | 19 | FC | 1000 | | | 600 | 1200 | | | | 1200 | |
| | 6 | 12.5 | 18 | 4C | 2000 | | | 500 | 1000 | | | | 1000 | |
| | 6 | 14 | 19 | FD | 1000 | | | 500 | 1000 | | | | 1000 | |
| | 7 | 14 | 18 | 4D | 1600 | | | 450 | 900 | | | | 850 | |
| | 7 | 15 | 19 | FE | 1000 | | | 450 | 900 | | | | 850 | |
| | 8 | 15 | 18 | 4F | 1200 | | | 400 | 800 | | | | 740 | |
| | 8 | 17 | 19 | FF | 500 | | | 400 | 800 | | | | 740 | |
| | 9 | 14 | 18 | 4H | 1200 | | | 350 | 700 | | | | 650 | |
| | 9 | 16 | 18 | 4J | 900 | | | 350 | 700 | | | | 650 | |
| 10 | 18 | 19 | FG | 500 | | | 300 | 650 | | | | 590 | | |
| 11 | 14 | 18 | 4M | 1000 | | | 300 | 600 | | | | 540 | | |
| 22.5 mm | 5 | 14 | 26.5 | 5A | 1200 | | | | 800 | | | | 770 | |
| | 6 | 15 | 26.5 | 5B | 1000 | | | | 700 | | | | 640 | |
| | 7 | 16.5 | 26.5 | 5D | 760 | | | | 600 | | | | 550 | |
| | 8 | 20 | 28 | FH | 500 | | | | 500 | | | | 480 | |
| | 8.5 | 18.5 | 26.5 | 5F | 500 | | | | 480 | | | | 450 | |
| | 10 | 22 | 28 | FI | 570* | | | | 420 | | | | 380 | |
| | 10.5 | 19 | 26.5 | 5G | 594* | | | | 400 | | | | 360 | |
| | 10.5 | 20.5 | 26.5 | 5H | 594* | | | | 400 | | | | 360 | |
| | 11 | 21 | 26.5 | 5I | 561* | | | | 380 | | | | 350 | |
| | 12 | 24 | 28 | FJ | 480* | | | | 350 | | | | 310 | |

* TPS (Tray-Packing-System). Plate versions may have different packing units. Moulded versions. Rights reserved to amend design data without prior notification. Samples and pre-production needs on request.



Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

| PCM | Size | | | | bulk | pcs. per packing unit | | | | | | | | | | | |
|----------------|------|------|------|-----------|------|-----------------------|---|-------|-------|----------|-------|-------|-----------|-------|-----------|-------|-------|
| | | | | | | ROLL | | REEL | | | | AMMO | | | | | |
| | W | H | L | Codes | | S | N | O | ø 360 | | ø 500 | | 340 x 340 | | 490 x 370 | | |
| | | | | | | | | H16.5 | H18.5 | H16.5 | H18.5 | H16.5 | H18.5 | H16.5 | H18.5 | H16.5 | H18.5 |
| | | | | | | | | F | I | H | J | A | C | B | D | | |
| 27.5 mm | 9 | 19 | 31.5 | 6A | 567* | - | - | - | - | 460/340* | - | - | 420 | | | | |
| | 11 | 21 | 31.5 | 6B | 459* | - | - | - | - | 380/280* | - | - | 350 | | | | |
| | 13 | 24 | 31.5 | 6D | 378* | - | - | - | - | 300 | - | - | 290 | | | | |
| | 13 | 25 | 33 | FK | 405* | - | - | - | - | - | - | - | - | | | | |
| | 15 | 26 | 31.5 | 6F | 324* | - | - | - | - | 270 | - | - | 250 | | | | |
| | 15 | 26 | 33 | FL | 324* | - | - | - | - | - | - | - | - | | | | |
| | 17 | 29 | 31.5 | 6G | 198* | - | - | - | - | - | - | - | - | | | | |
| | 17 | 34.5 | 31.5 | 6I | 198* | - | - | - | - | - | - | - | - | | | | |
| | 20 | 32 | 33 | FM | 162* | - | - | - | - | - | - | - | - | | | | |
| | 20 | 39.5 | 31.5 | 6J | 162* | - | - | - | - | - | - | - | - | | | | |
| 37.5 mm | 9 | 19 | 41.5 | 7A | 441* | - | - | - | - | - | - | - | - | | | | |
| | 11 | 22 | 41.5 | 7B | 357* | - | - | - | - | - | - | - | - | | | | |
| | 13 | 24 | 41.5 | 7C | 294* | - | - | - | - | - | - | - | - | | | | |
| | 15 | 26 | 41.5 | 7D | 252* | - | - | - | - | - | - | - | - | | | | |
| | 17 | 29 | 41.5 | 7E | 154* | - | - | - | - | - | - | - | - | | | | |
| | 19 | 32 | 41.5 | 7F | 140* | - | - | - | - | - | - | - | - | | | | |
| | 20 | 39.5 | 41.5 | 7G | 126* | - | - | - | - | - | - | - | - | | | | |
| | 24 | 45.5 | 41.5 | 7H | 112* | - | - | - | - | - | - | - | - | | | | |
| | 31 | 46 | 41.5 | 7I | 84* | - | - | - | - | - | - | - | - | | | | |
| | 35 | 50 | 41.5 | 7J | 35* | - | - | - | - | - | - | - | - | | | | |
| | 40 | 55 | 41.5 | 7K | 28* | - | - | - | - | - | - | - | - | | | | |
| 48.5 mm | 19 | 31 | 56 | 8D | 120* | - | - | - | - | - | - | - | - | | | | |
| | 23 | 34 | 56 | 8E | 80* | - | - | - | - | - | - | - | - | | | | |
| | 27 | 37.5 | 56 | 8H | 84* | - | - | - | - | - | - | - | - | | | | |
| | 33 | 48 | 56 | 8J | 25* | - | - | - | - | - | - | - | - | | | | |
| | 37 | 54 | 56 | 8L | 25* | - | - | - | - | - | - | - | - | | | | |
| 52.5 mm | 25 | 45 | 57 | 9D | 70* | - | - | - | - | - | - | - | - | | | | |
| | 30 | 45 | 57 | 9E | 60* | - | - | - | - | - | - | - | - | | | | |
| | 35 | 50 | 57 | 9F | 25* | - | - | - | - | - | - | - | - | | | | |
| | 45 | 55 | 57 | 9H | 20* | - | - | - | - | - | - | - | - | | | | |
| | 45 | 65 | 57 | 9J | 20* | - | - | - | - | - | - | - | - | | | | |

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.

Updated data on www.wima.com



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
|--------------------------|---|---|---|-----------------------|---|---------------------|---|---|--|----|--|-----|------|---|----|----|----|
| M | K | S | 2 | C | 0 | 2 | 1 | 0 | 0 | 1 | A | 0 | 0 | M | S | S | D |
| MKS 2 | | | | 63 VDC | | 0.01 µF | | | 2.5x6.5x7.2 | | - | 20% | bulk | 6 -2 | | | |
| Type description: | | | | Rated voltage: | | Capacitance: | | | Size: | | Tolerance: | | | Packing: | | | |
| SMD-PET = SMDT | | | | 50 VDC = B0 | | 22 pF = 0022 | | | 4.8x3.3x3 Size 1812 = KA | | ±20% = M | | | AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ... | | | |
| SMD-PEN = SMDN | | | | 63 VDC = C0 | | 47 pF = 0047 | | | 4.8x3.3x4 Size 1812 = KB | | ±10% = K | | | | | | |
| SMD-PPS = SMDI | | | | 100 VDC = D0 | | 100 pF = 0100 | | | 5.7x5.1x3.5 Size 2220 = QA | | ±5% = J | | | | | | |
| FKP 02 = FKPO | | | | 250 VDC = F0 | | 150 pF = 0150 | | | 5.7x5.1x4.5 Size 2220 = QB | | ±2.5% = H | | | | | | |
| MKS 02 = MKS0 | | | | 400 VDC = G0 | | 220 pF = 0220 | | | 7.2x6.1x3 Size 2824 = TA | | ±1% = E | | | | | | |
| FKS 2 = FKS2 | | | | 450 VDC = H0 | | 330 pF = 0330 | | | 7.2x6.1x5 Size 2824 = TB | | ... | | | | | | |
| FKP 2 = FKP2 | | | | 520 VDC = H2 | | 470 pF = 0470 | | | 10.2x7.6x5 Size 4030 = VA | | Version code: Standard = 00 Version A1 = 1A Version A1.1.1 = 1B Version A2 = 2A ... | | | | | | |
| FKS 3 = FKS3 | | | | 600 VDC = I0 | | 680 pF = 0680 | | | 12.7x10.2x6 Size 5040 = XA | | | | | | | | |
| FKP 3 = FKP 3 | | | | 630 VDC = J0 | | 1000 pF = 1100 | | | 15.3x13.7x7 Size 6054 = YA | | Pin length (untaped) 3.5 ±0.5 = C9 6 -2 = SD 16 ±1 = P1 ... Pin length (taped) none = 00 | | | | | | |
| MKS 2 = MKS2 | | | | 700 VDC = K0 | | 1500 pF = 1150 | | | 2.5x7x4.6 PCM 2.5 = 0B | | | | | | | | |
| MKP 2 = MKP2 | | | | 800 VDC = L0 | | 2200 pF = 1220 | | | 3x7.5x4.6 PCM 2.5 = 0C | | ... | | | | | | |
| MKS 4 = MKS4 | | | | 850 VDC = M0 | | 3300 pF = 1330 | | | 2.5x6.5x7.2 PCM 5 = 1A | | | | | | | | |
| MKP 4C = MKPC | | | | 900 VDC = N0 | | 4700 pF = 1470 | | | 3x7.5x7.2 PCM 5 = 1B | | | | | | | | |
| MKP 4 = MKP4 | | | | 1000 VDC = O1 | | 6800 pF = 1680 | | | 2.5x7x10 PCM 7.5 = 2A | | | | | | | | |
| MKP 10 = MKP1 | | | | 1100 VDC = P0 | | 0.01 µF = 2100 | | | 3x8.5x10 PCM 7.5 = 2B | | | | | | | | |
| FKP 1 = FKP1 | | | | 1200 VDC = Q0 | | 0.022 µF = 2220 | | | 3x9x13 PCM 10 = 3A | | | | | | | | |
| MKP-X2 = MKX2 | | | | 1250 VDC = R0 | | 0.047 µF = 2470 | | | 4x9x13 PCM 10 = 3C | | | | | | | | |
| MKP-X1 R = MKX1 | | | | 1500 VDC = S0 | | 0.1 µF = 3100 | | | 5x11x18 PCM 15 = 4B | | | | | | | | |
| MKP-Y2 = MKY2 | | | | 1600 VDC = T0 | | 0.22 µF = 3220 | | | 6x12.5x18 PCM 15 = 4C | | | | | | | | |
| MP 3-X2 = MPX2 | | | | 2000 VDC = U0 | | 0.47 µF = 3470 | | | 5x14x26.5 PCM 22.5 = 5A | | | | | | | | |
| MP 3-X1 = MPX1 | | | | 2500 VDC = V0 | | 1 µF = 4100 | | | 6x15x26.5 PCM 22.5 = 5B | | | | | | | | |
| MP 3-Y2 = MPY2 | | | | 3000 VDC = W0 | | 2.2 µF = 4220 | | | 9x19x31.5 PCM 27.5 = 6A | | | | | | | | |
| MP 3R-Y2 = MPRY | | | | 4000 VDC = X0 | | 4.7 µF = 4470 | | | 11x21x31.5 PCM 27.5 = 6B | | | | | | | | |
| MKP 4F = MKPF | | | | 6000 VDC = Y0 | | 10 µF = 5100 | | | 9x19x41.5 PCM 37.5 = 7A | | | | | | | | |
| Snubber MKP = SNMP | | | | 250 VAC = 0W | | 22 µF = 5220 | | | 11x22x41.5 PCM 37.5 = 7B | | | | | | | | |
| Snubber FKP = SNFP | | | | 275 VAC = 1W | | 47 µF = 5470 | | | 19x31x56 PCM 48.5 = 8D | | | | | | | | |
| GTO MKP = GTOM | | | | 300 VAC = 2W | | 100 µF = 6100 | | | 25x45x57 PCM 52.5 = 9D | | | | | | | | |
| DC-LINK MKP 3 = DCP3 | | | | 305 VAC = AW | | 220 µF = 6220 | | | ... | | | | | | | | |
| DC-LINK MKP 4 = DCP4 | | | | 350 VAC = BW | | 1000 µF = 7100 | | | Pin length (taped) none = 00 | | | | | | | | |
| DC-LINK MKP 4S = DCP4S | | | | 440 VAC = 4W | | 1500 µF = 7150 | | | | | | | | | | | |
| DC-LINK MKP 5 = DCP5 | | | | 500 VAC = 5W | | ... | | | | | | | | | | | |
| DC-LINK MKP 6 = DCP6 | | | | ... | | ... | | | | | | | | | | | |
| DC-LINK HC = DCHC | | | | | | | | | | | | | | | | | |
| DC-LINK HY = DCHY | | | | | | | | | | | | | | | | | |

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.