



**MMSZ4678
 THRU
 MMSZ4716**

**500mW Silicon
 Zener Diodes**

Features

- Zener Voltage 1.8V-39V
- Very Sharp Reverse Characteristic
- VZ – tolerance $\pm 5\%$
- High Reliability
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Mechanical Data


- Halogen free available upon request by adding suffix "-HF"
- Polarity: Cathode indicated by polarity band
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings

| | Symbol | Value | Units |
|--|------------|------------|------------------|
| Max. Steady State Power Dissipation at $T_L < 75^\circ\text{C}$, Lead Length=3/8" | P_D | 500 | mW |
| Junction Temperature | T_J | 150 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -55 to 150 | $^\circ\text{C}$ |
| Thermal Resistance(Junction to Ambient) | R_{thJA} | 340 | K/W |

Electrical Characteristics @ 25°C Unless Otherwise Specified

| | Symbol | Maximum | Unit |
|--|--------|---------|------|
| Max. Forward Voltage @ $I_F=10\text{mA}$ | V_F | 0.95 | V |

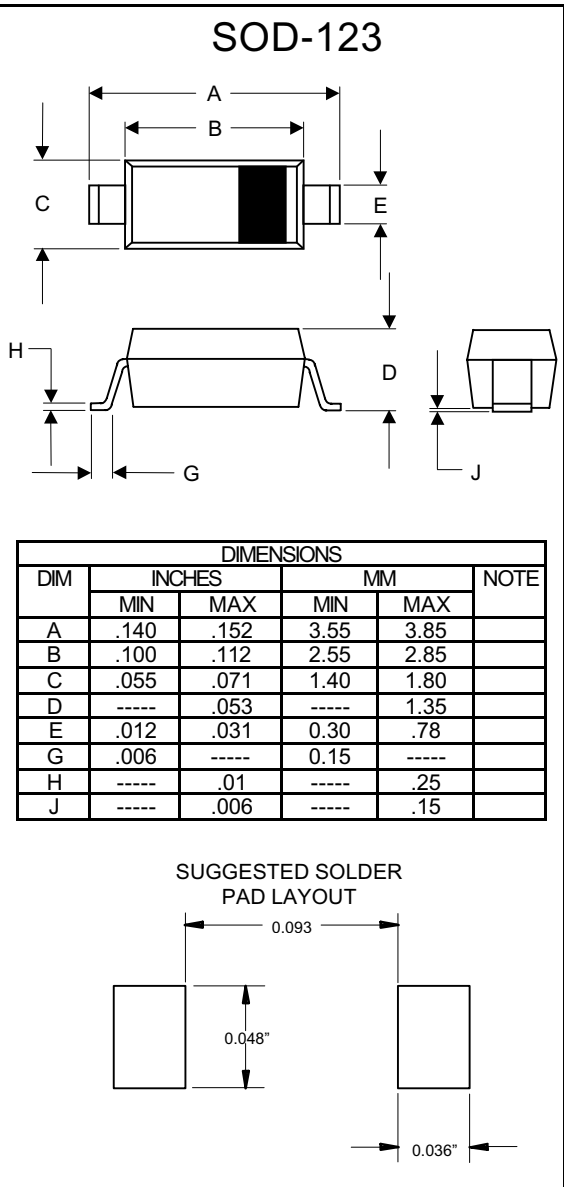

MMSZ4678 thru MMSZ4716

Electrical Characteristics (T_i= 30°C Unless Otherwise Noted, V_F=0.95V Max @ I_F=10mA for all types)

| Device | Zener Voltage | | | @I _{ZT} u A | Leakage Current | | Device Marking |
|----------|------------------------|------|-------|-------------------------|---------------------------------|-------|-------------------|
| | V _Z (Volts) | | | | I _R @ V _R | | |
| | Min | Nom | Max | | u A | Volts | |
| MMSZ4678 | 1.71 | 1.8 | 1.89 | 50 | 7.5 | 1.0 | CC |
| MMSZ4679 | 1.90 | 2.0 | 2.10 | 50 | 5.0 | 1.0 | CD |
| MMSZ4680 | 2.09 | 2.2 | 2.31 | 50 | 5.0 | 1.0 | CE |
| MMSZ4681 | 2.28 | 2.40 | 2.52 | 50 | 2.0 | 1.0 | CF |
| MMSZ4682 | 2.565 | 2.7 | 2.835 | 50 | 1.0 | 1.0 | CH |
| MMSZ4683 | 2.85 | 3.0 | 3.15 | 50 | 0.8 | 1.0 | CJ |
| MMSZ4684 | 3.135 | 3.3 | 3.465 | 50 | 7.5 | 1.5 | CK |
| MMSZ4685 | 3.42 | 3.6 | 3.78 | 50 | 7.5 | 2.0 | CM |
| MMSZ4686 | 3.705 | 3.9 | 4.095 | 50 | 5.0 | 2.0 | CN |
| MMSZ4687 | 4.085 | 4.3 | 4.515 | 50 | 4.0 | 2.0 | CP |
| MMSZ4688 | 4.465 | 4.7 | 4.935 | 50 | 10 | 3.0 | CT |
| MMSZ4689 | 4.845 | 5.1 | 5.355 | 50 | 10 | 3.0 | CU |
| MMSZ4690 | 5.32 | 5.6 | 5.88 | 50 | 10 | 4.0 | CV |
| MMSZ4691 | 5.89 | 6.2 | 6.51 | 50 | 10 | 5.0 | CA |
| MMSZ4692 | 6.46 | 6.8 | 7.14 | 50 | 10 | 5.1 | CX |
| MMSZ4693 | 7.125 | 7.5 | 7.875 | 50 | 10 | 5.7 | CY |
| MMSZ4694 | 7.79 | 8.2 | 8.61 | 50 | 10 | 6.2 | CZ |
| MMSZ4695 | 8.265 | 8.7 | 9.135 | 50 | 10 | 6.6 | DC |
| MMSZ4696 | 8.645 | 9.1 | 9.555 | 50 | 10 | 6.9 | DD |
| MMSZ4697 | 9.50 | 10 | 10.5 | 50 | 10 | 7.6 | DE |
| MMSZ4698 | 10.45 | 11 | 11.55 | 50 | 0.05 | 8.4 | DF |
| MMSZ4699 | 11.40 | 12 | 12.6 | 50 | 0.05 | 9.1 | DH |
| MMSZ4700 | 12.35 | 13 | 13.65 | 50 | 0.05 | 9.8 | DJ |
| MMSZ4701 | 13.30 | 14 | 14.7 | 50 | 0.05 | 10.6 | DK |
| MMSZ4702 | 14.25 | 15 | 15.75 | 50 | 0.05 | 11.4 | DM |
| MMSZ4703 | 15.20 | 16 | 16.8 | 50 | 0.05 | 12.1 | DN |
| MMSZ4704 | 16.15 | 17 | 17.85 | 50 | 0.05 | 12.9 | DP |
| MMSZ4705 | 17.10 | 18 | 18.9 | 50 | 0.05 | 13.6 | DT |
| MMSZ4706 | 18.05 | 19 | 19.95 | 50 | 0.05 | 14.4 | DU |
| MMSZ4707 | 19.00 | 20 | 21 | 50 | 0.01 | 15.2 | DV |
| MMSZ4708 | 20.9 | 22 | 23.1 | 50 | 0.01 | 16.7 | DA |
| MMSZ4709 | 22.8 | 24 | 25.2 | 50 | 0.01 | 18.2 | DX |
| MMSZ4710 | 23.75 | 25 | 26.25 | 50 | 0.01 | 19.0 | DY |
| MMSZ4711 | 25.65 | 27 | 28.35 | 50 | 0.01 | 20.4 | EA |
| MMSZ4712 | 26.6 | 28 | 29.4 | 50 | 0.01 | 21.2 | EC |
| MMSZ4713 | 28.5 | 30 | 31.5 | 50 | 0.01 | 22.8 | ED |
| MMSZ4714 | 31.35 | 33 | 34.65 | 50 | 0.01 | 25.0 | EF |
| MMSZ4715 | 34.2 | 36 | 37.8 | 50 | 0.01 | 27.3 | EF |
| MMSZ4716 | 37.05 | 39 | 40.95 | 50 | 0.01 | 29.6 | EH |

TYPICAL CHARACTERISTICS



Figure 1. Temperature Coefficients (Temperature Range -55°C to +150°C)



Figure 2. Temperature Coefficients (Temperature Range -55°C to +150°C)



Figure 3. Steady State Power Derating



Figure 4. Maximum Nonrepetitive Surge Power



Figure 5. Effect of Zener Voltage on Zener Impedance

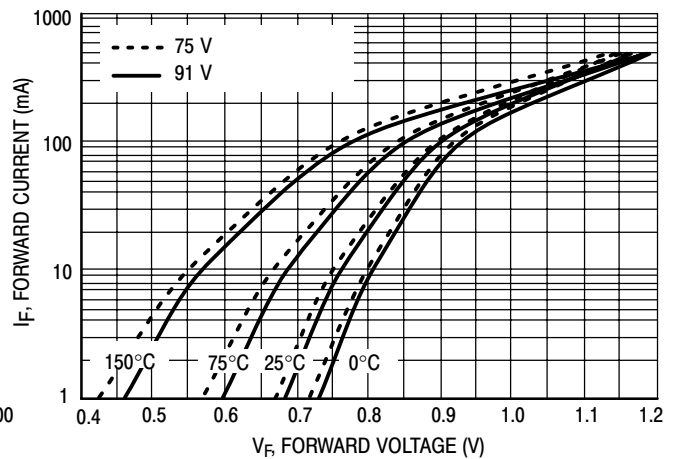


Figure 6. Typical Forward Voltage

TYPICAL CHARACTERISTICS



Figure 7. Typical Capacitance

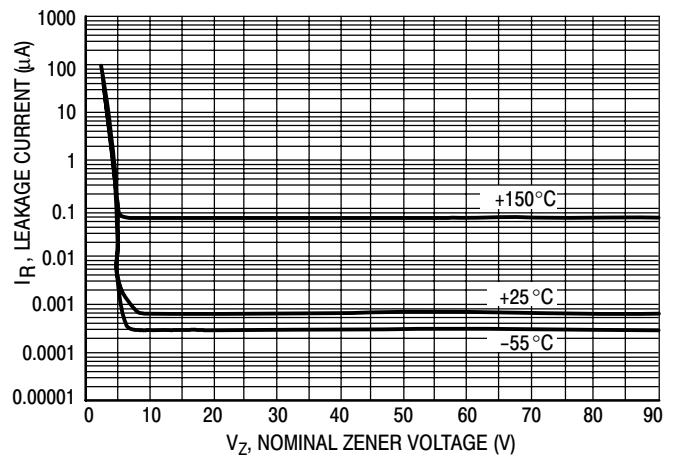


Figure 8. Typical Leakage Current



Figure 9. Zener Voltage versus Zener Current (V_Z Up to 12 V)

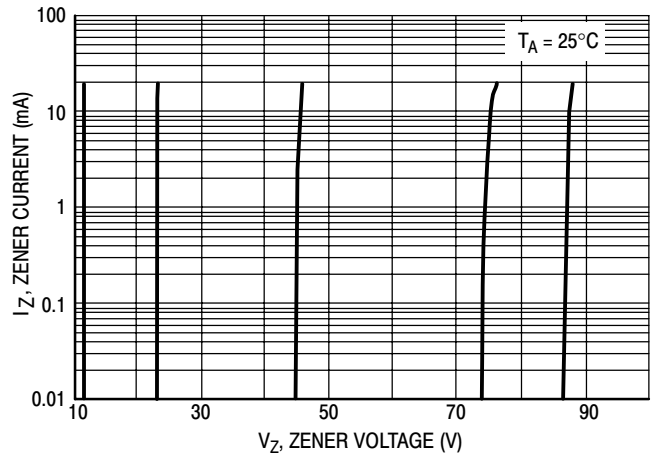


Figure 10. Zener Voltage versus Zener Current (12 V to 91 V)



TM

Micro Commercial Components

Ordering Information :

| Device | Packing |
|----------------|-----------------------|
| Part Number-TP | Tape&Reel: 3Kpcs/Reel |

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.