IL-312 SERIES CONNECTORS

0.5mm (.020") Contact Spacing, PCB-to-PCB SMT Connectors

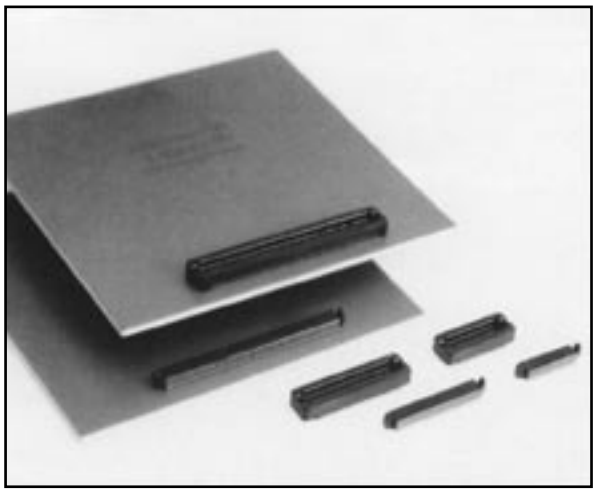

These high density SMT connectors are designed for parallel PCB-to-PCB applications. They are ideal for use in VCRs, notebook PCs, cordless telephones, mobile phones, audio/visual and other telecommunications equipment where reduced size and weight are important.

GENERAL SPECIFICATIONS

Number of Contacts	20, 30, 40, 50, 60, 70, 80
Contact Spacing	0.5mm (.020")
Current Rating	0.3 Amp per contact
Dielectric Withstanding Voltage	500 VAC r.m.s. (for one minute)
Insulation Resistance	100 megohms min.
Contact Resistance	40 milliohms max.
Operating Temperature	-40°C to +85°C

MATERIALS AND FINISHES*

Description	Materials/Finishes
Insulator	Heat-resistant plastic (UL94V-0, Black)
Contact	Copper alloy/Gold Plating: connecting area 0.1µm (.000004") min.

FEATURES

- SMT contacts
- 2.5mm (.098") to 3.5mm (.138") stacked height
- Surface area of both pin and socket connectors facilitates automatic mounting
- Contact terminal length permits image recognition
- Available on embossed tape for automatic mounting
- Lead free

Connector Profile (Ref.)

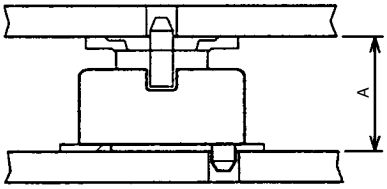

Stacking Height (A)

	Pin		
Socket	Connector height code	Blank (standard)	30
	Blank (standard)	2.5 (.098)	3.0 (.118)
	H05	3.0 (.118)	3.5 (.138)

ORDERING INFORMATION

IL-312 – ** * * VF ** – A1

Series

No. of Contacts

20, 30, 40, 50, 60, 70, 80, 100

Contact Type

P – Pin S – Socket

Polarizing Boss

Blank – No Boss

B – Positioning Boss

Termination Style

VF – Straight

Connector Height Code

[Socket] Blank (Standard) – 2.15 (.085)

H05 – 2.65 (.104)

[Pin] Blank (Standard) – 1.55 (.061)

30 – 2.05 (.081)

Finish Code

A1 – Gold Plating, 0.1µm (.000004") min.

• Please consult JAE for verification of product availability.

Dimensions in mm (inches).

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.