

# FLUKE®

## The Fluke 66 and 68 Infrared Thermometers

Non-contact temperature measurement

### Technical Data

#### The professional's diagnostic tool

The Fluke 66 and Fluke 68 non-contact thermometers are the ideal professional diagnostic tools for HVAC technicians performing room balance checks, electricians evaluating electrical connections and auto mechanics diagnosing catalytic converters. This handheld portable tool enables professionals to research heating and ventilation problems, monitor the status of electrical motors and electrical panels and diagnose car malfunctions with ease. They measure surface temperatures, helping to quickly locate potential blockages or malfunctioning systems reducing work time and improving performance.

#### The 60 series thermometers feature:

- Laser guided sighting system for easy targeting with 1 % accuracy.
- 12-point data logging.
- Advanced optics to measure smaller targets at greater distances.
- Adjustable emissivity for more accurate temperature measurements.
- Selectable MAX, MIN, DIF and AVG functions that display values instantly with Hi/Lo Alarm.
- Temperatures up to 760 °C (1400 °F) (68, 68IS).
- Intrinsically Safe model available (68IS)\*.

#### Optical resolution

The laser sighting system guides measurements to the right target and indicates the approximate center of the measurement area.

(D:S = distance to spot using 90 % encircled energy at focal point).

The 68IS\* model is available for the noncontact temperature monitoring needs of potentially explosive or flammable environments.


\*Approved by Factory Mutual Research, a USA organization, for use in hazardous locations. The 68IS approval does not apply to atmosphere containing coal dust, grain dust, metal dust or fibers. Check your national and company regulations to determine if this approval is appropriate for your situation.




## Specifications

	<b>Fluke 66</b>	<b>Fluke 68/68IS*</b>
Temperature range	-32 to 600 °C (-25 to 1100 °F)	-32 to 760 °C (-25 to 1400 °F)
Accuracy (assumes ambient operating temperature of 23 °C [73 °F])	-32 to -26 °C (-25 to -15 °F): ±3 °C (±5 °F) -26 to -18 °C (-15 to 0 °F): ±2.5 °C (±4 °F) -18 to 23 °C (0 to 73 °F): ±2 °C (±3 °F) For targets above 23 °C (73 °F): ±1 % or reading or ±1 °C (±2 °F), whichever is greater	
Repeatability	±0.5 % or ≤ ±1 °C (±2 °F), whichever is greater	
Response time	≤ 0.5 second (95 % of reading)	
Spectral response	8 to 14 μm	
Emissivity	Digitally adjustable emissivity (from 0.1 to 1.0 by 0.01)	
Ambient operating temp.	0 to 50 °C (32 to 120 °F)	
Relative humidity	10 to 90 % RH non-condensing, at <30 °C (86 °F) ambient	
Storage temperature	-20 to 60 °C (-13 to 158 °F) without battery	
Dimensions	200 x 160 x 55 mm (8 x 6 x 2 in.)	
Weight	320 g (11 oz.)	
Power	9 V alkaline or NiCd battery	
Batter life (alkaline)	20 hours with laser and backlight on 50 % 40 hours with laser and backlight off	
Laser sighting (Class II)	Offset single point laser point	
Typical distance to target	5 m (15 ft.)	8 m (25 ft.)
Distance to Spot (D:S)	30:1 at focus point	50:1 at focus point
MIN, MAX, AVG, DIF Temperature display	•	
Data logging	12 points	
Probe jack	•	
Display hold (7 seconds)	•	
Hi/Low alarm	•	
LCD backlight	•	
Temperature display	°C or °F selectable	
Display resolution	0.1 °C (0.1 °F)	
Hard carrying case	•	
Locking trigger	•	
Tripod mounting	6.35 mm (.25 in.) 20 UNC threading	
Warranty	2 years, conditional	

\* Approved by Factory Mutual Research for use in hazardous locations.

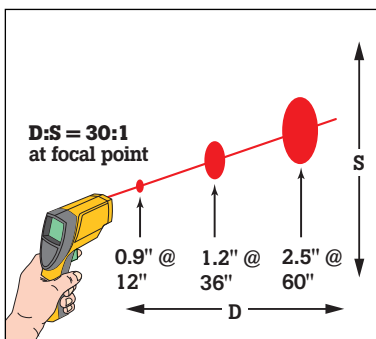

Use the Fluke 66 within 5 m (15 ft.) of the intended target. At greater distances, the measured area will be larger (approximately the distance divided by 30).

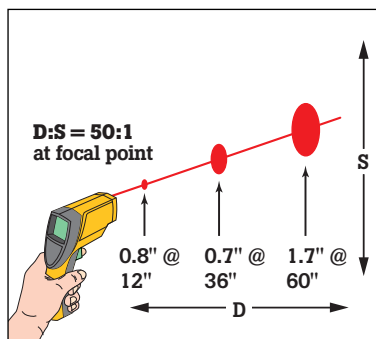

Use the Fluke 68 and 68IS within 8 m (25 ft.) of the intended target. At greater distances, the measured area will be larger (approximately the distance divided by 50).

## Ordering information

**Fluke 66** Infrared Thermometer  
**Fluke 68** Infrared Thermometer  
**Fluke 68IS** Infrared Thermometer

## Included



## Optional accessories:

- RTD temperature probe (standard w/68IS) 32 °C to 260 °C (-25 °F to 500 °F)
- Non-contact thermometer holster



\*Included w/68IS

## Standard Feature (68IS only)

- Factory Mutual Research Intrinsically Safe approval, including probe (Intrinsically safe, Class 1 Division 1 Groups A, B, C, D Class I, Zone 0, AEx ia IIC, T4 at 50 °C when used with 9V alkaline battery.) Groups A, B, C, D refers to: Acetylene, Hydrogen, Ethylene and Propane.

**Fluke.** Keeping your world up and running.

## Fluke Corporation

PO Box 9090, Everett, WA USA 98206

Fluke Europe B.V.

PO Box 1186, 5602 BD

Eindhoven, The Netherlands

For more information call:

In the U.S.A. (800) 443-5853 or Fax (425) 446-5116

In Europe/M-East/Africa +31 (40) 2 675 200 or Fax +31 (40) 2 675 222

In Canada (800) 36-FLUKE or Fax (905) 890-6866

From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116

Web access: <http://www.fluke.com>

©2005 Fluke Corporation. All rights reserved.

Printed in U.S.A. 6/2005 2153543 D-US-N Rev C



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.