

# NEON-1040/1020

Intel® Atom™ Quad-Core Processor E3845 1.91 GHz-based smart camera



## Introduction

ADLINK's new generation x86 NEON-1040/1020 features 4MP 60fps/2MP 120fps global shutter sensor and the Intel® Atom™ quad core 1.91 GHz processor, featuring minimal footprint and rugged IP67-rated construction. The quad core CPU increases computing power and FPGA coprocessors and GPU deliver advanced image processing, both beyond the capabilities of conventional smart cameras. Rich software support and API compatibility enable easy migration from original x86 platforms, eliminating software and development language burdens across the platform, reducing time to market.

The NEON-1040/1020 is a powerful new generation x86 smart camera that features Intel® Atom™ quad core Processor E3845 1.91 GHz, global shutter image sensor (4 MP at 60 fps for the 1040, 2 MP at 120 fps for the 1020), and PWM lighting control support. The NEON-1040/1020 stands out with its minimal footprint, and superior computing power. Rugged construction with IP67-rated housing and M12 connectors enables the NEON-1040 to withstand the harshest industrial environments.

High-end quad-core processor with FPGA coprocessors, GPU and up to 32GB storage for image processing, programs, and archiving, all provide advanced image processing ability that's ideally suited to high-speed, high-resolution industrial imaging applications.

Optimal I/O including one additional slave GigE Vision camera connection, 4x isolated inputs, 4x isolated outputs, and VGA output maximize integration with external devices. Additionally, flexible software development support, including GenTL support for image acquisition and Open CV and Open CL programming, significantly benefits developers by easing migration from x86 platforms.

## Features


- Quad core Intel® Atom™ processor E3845 1.91GHz
- 4M 60fps/2M 120fps monochrome global shutter CMOS sensor
- IP67-rated housing and M12 connectors thoroughly protect against dust & moisture
- Advanced image processing support
- Additional GigE Vision 1 slave camera support reduces TCO
- Built-in PWM lighting control
- 4x digital inputs, 4x digital outputs, USB 2.0 and RS-232 ports
- Flexible software support with STEMMER Common Vision Blox, MVTec HALCON, COGNEX VisionPro, Teledyne Dalsa Sherlock, Adaptive Vision Studio, Euresys Open eVision, and many others
- GenICam, GenTL, Open CV and Open CL compatible with image acquisition
- VGA output, max. 2560x1600 @60 Hz

## Applications

- Industrial automation
- Robot guidance
- 3D vision
- Medical imaging
- Machine Tooling

## Software Support

- OS Information
  - Windows® 7, Embedded Standard 7

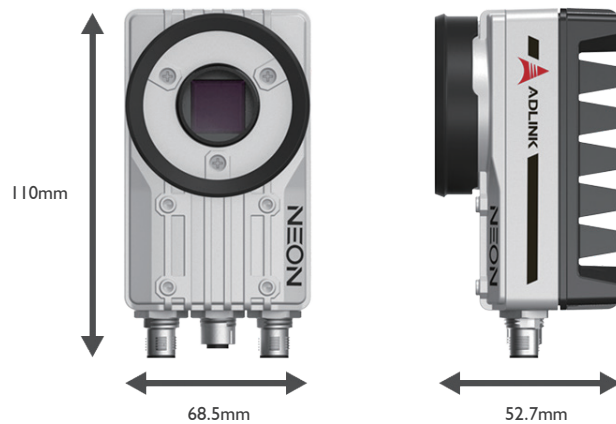

Standard M4 mounting holes enable easy installation



Programmable LED indicator provides status information



M12 connectors allow secure, rugged connection

## Specifications

Model Name	NEON-1020	NEON-1040
<b>Processing &amp; Memory</b>		
■ Processor	Intel® Atom™ E3845 Processor, Quad Core @ 1.91 GHz	
■ Display	VGA output, max. 2048 x 1152 at 60 Hz	
■ RAM	4 GB DDR3L	
■ Storage	16 to 32 GB solid state drive	
■ Advanced Processing	ROI, LUT, Shading Correction	
<b>Sensor</b>		
■ Image Sensor	CMOSIS CMV2000	CMOSIS CMV4000
■ Resolution	2048 x 1088	2048 x 2048
■ Sensor Size	2/3"	1"
■ Format	Monochrome	
■ Pixel Size (µm)	5.5	
■ Frame Rate (fps)	120	60
■ Shutter	Global	
■ Trigger Mode	External trigger, software trigger, free run	
<b>I/O Interface</b>		
■ Trigger Input	1x Opto-isolated trigger input	
■ Digital Output	4x sink type output, max sink 100mA sink voltage max 30VDC	
■ Digital Input	4x TTL level input	
■ PWM Lighting Control	■ Drive Method	Constant current 500mA
	■ Applicable Light Units	24 VDC illuminators
	■ Dimming Resolution	1000:1
■ Ethernet	1 x GbE	
■ Serial Communication	1 x RS-232 (TX and RX only)	
■ USB	1 x USB 2.0	
<b>Mechanical</b>		
■ Dimensions	68.5mm W x 110mm D x 52.7 mm H / 2.70" W x 4.33" D x 2.08" H (68.5mm x 110mm x 42.7mm reduced size option)	
■ Lens mount	C mount	
■ Connectors	1 x M12 8-pin (Female), 1xM12 17-pin (Male), 1x M12 12-pin (Male)	
<b>Software Support</b>		
■ Operation System	Windows 7, Windows Embedded Standard 7	
<b>Environmental &amp; Electrical</b>		
■ Power Consumption	24 VDC +/-10%, 13W (Typical)	
■ Operating Temperature	Standard: 0°C to 50°C (32°F to 122°F)	0° to 50 °C (32° F to 122° F)
	Extended temperature option: 0° to 60 °C (32° F to 140° F) (w/ industrial SSD)	
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes	
■ Certification	IP67, CE, FCC Class A	

## Ordering Information

Model Name	Description
NEON-1040/M4G/SSD32G	Intel® Atom™ Quad-Core Processor E3845 1.91 GHz-based smart camera with 4MP, 60fps, global shutter sensor with 32G SSD
NEON-1040/M4G/SSD16G	Intel® Atom™ Quad-Core Processor E3845 1.91 GHz-based smart camera with 4MP, 60fps, global shutter sensor with 16G SSD
NEON-1020/M4G/SSD32G	Intel® Atom™ Quad-Core Processor E3845 1.91 GHz-based smart camera with 2MP, 120fps, global shutter sensor with 32G SSD
NEON-1020/M4G/SSD16G	Intel® Atom™ Quad-Core Processor E3845 1.91 GHz-based smart camera with 2MP, 120fps, global shutter sensor with 16G SSD

## Optional Accessories

GigE cable 5m	5m Ethernet cable with shielded and AWG 26 stranded. M12 to RJ45 plug
Power & DI/O cable 3m	3m cable for NEON to connect power, DI/O and UART cable. M12 to free cable end.
VGA & USB cable 3m	3m cable for NEON to connect VGA and USB. M12 plug to VGA female and USB-type A female plug.
IP67 kits lens protector	Lens protector for NEON to achieved IP67 rated
DIN-1040 terminal board	Terminal board for DI/O, RS-232, GigE, USB and power input for NEON series.
16mm C-mount lens	16mm 4Mega pixels resolution C-mount lens for 1" sensor
LED lighting	15" high-density white LED arrays in ring shape.
NEON Starter Kit	ADLINK Smart Camera Starter Kit with NEON-1040/1020 and accessories package



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.