


### SP4208 series 3.0pF, 30A Discrete TVS Diode



#### Description

The SP4208 components integrate low capacitance steering diodes with one or two avalanche breakdown diodes for unidirectional or bidirectional protection, respectively, to protect against ESD and lightning induced surge events. These components can safely absorb up to 30A per IEC 61000-4-5 2<sup>nd</sup> edition ( $t_p=8/20\mu s$ ) without performance degradation and a minimum  $\pm 30kV$  ESD per IEC 61000-4-2 International Standard. The low loading capacitance and high surge capability make it ideal for protecting telecommunication ports such as Ethernet and other high speed data interfaces.


#### Pinout

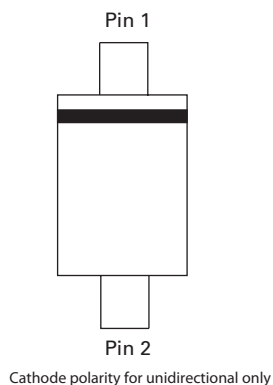

#### Features

- ESD, IEC 61000-4-2,  $\pm 30kV$  contact,  $\pm 30kV$  air
- EFT, IEC 61000-4-4, 40A (5/50ns)
- Lightning, IEC 61000-4-5 2<sup>nd</sup> edition, 30A ( $t_p=8/20\mu s$ )
- Low capacitance of 3.0pF (@  $V_R=0V$ )
- Low leakage current
- Unidirectional and bidirectional configuration
- Small SOD323 package fits 0805 footprints
- AEC-Q101 qualified
- Halogen free, lead free and RoHS compliant
- Moisture Sensitivity Level(MSL -1)

#### Functional Block Diagram

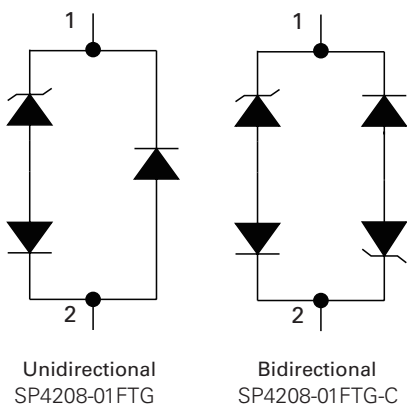

#### Applications

- 10/100/1000 2.5 and 5 Gigabit Ethernet
- Medical Equipment
- Computers and Peripherals
- Instrumentation

Life Support Note:

#### Not Intended for Use in Life Support or Life Saving Applications

The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

### Absolute Maximum Ratings

| Symbol     | Parameter                            | Value      | Units |
|------------|--------------------------------------|------------|-------|
| $I_{PP}$   | Peak Current ( $t_p=8/20\mu s$ )     | 30         | A     |
| $P_{PK}$   | Peak Pulse Power ( $t_p=8/20\mu s$ ) | 750        | W     |
| $T_{OP}$   | Operating Temperature                | -40 to 125 | °C    |
| $T_{STOR}$ | Storage Temperature                  | -55 to 150 | °C    |

Notes:

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.

### Electrical Characteristics ( $T_{OP}=25^\circ C$ )


| Parameter                          | Symbol     | Test Conditions                   | Min      | Typ  | Max | Units    |
|------------------------------------|------------|-----------------------------------|----------|------|-----|----------|
| Breakdown Voltage                  | $V_{BD}$   | $I_R=1mA$                         |          | 9.5  |     | V        |
| Reverse Standoff Voltage           | $V_{RWM}$  | $I_R \leq 1\mu A$                 |          |      | 8.0 | V        |
| Leakage Current                    | $I_{LEAK}$ | $V_R=8.0V$                        |          | 0.02 | 0.5 | $\mu A$  |
| Clamp Voltage <sup>1</sup>         | $V_C$      | $I_{PP}=1A, t_p=8/20\mu s, Fwd$   |          | 11.5 |     | V        |
|                                    |            | $I_{PP}=17A, t_p=8/20\mu s, Fwd$  |          | 19   |     | V        |
|                                    |            | $I_{PP}=30A, t_p=8/20\mu s, Fwd$  |          | 25   |     | V        |
| Dynamic Resistance <sup>2</sup>    | $R_{DYN}$  | TLP, $t_P=100ns$ , I/O to GND     |          | 0.37 |     | $\Omega$ |
| ESD Withstand Voltage <sup>1</sup> | $V_{ESD}$  | IEC 61000-4-2 (Contact Discharge) | $\pm 30$ |      |     | kV       |
|                                    |            | IEC 61000-4-2 (Air Discharge)     | $\pm 30$ |      |     | kV       |
| Diode Capacitance <sup>1</sup>     | $C_D$      | Reverse Bias=0V, $f=1MHz$         |          | 3.0  |     | pF       |

Note:


1. Parameter is guaranteed by design and/or component characterization.

2. Transmission Line Pulse (TLP) with 100ns width, 2ns rise time, and average window  $t_1=70ns$  to  $t_2=90ns$


### 8/20 $\mu s$ Pulse Waveform

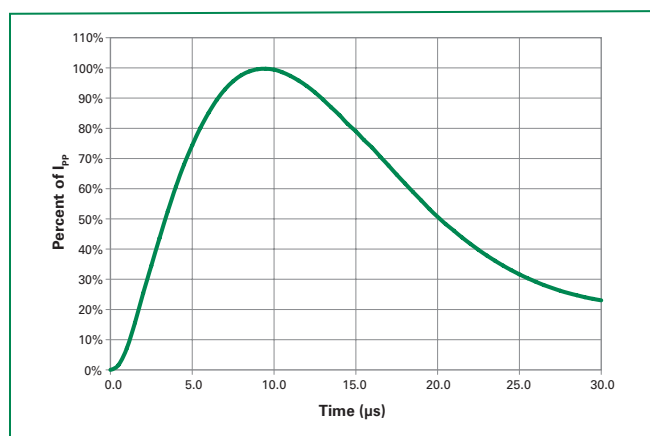


### Positive Transmission Line Pulsing (TLP) Plot

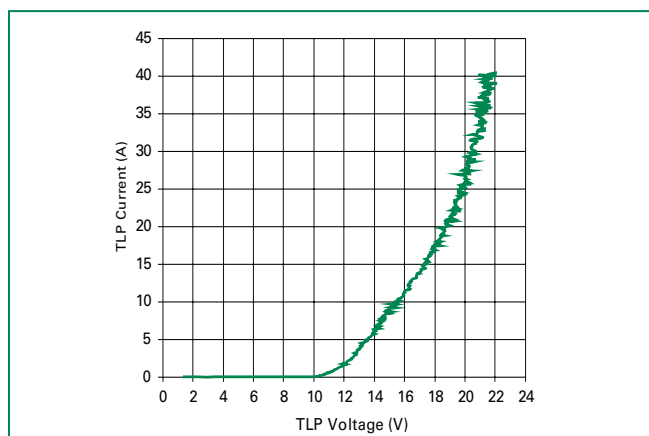


### Non-Repetitive Peak Pulse Power vs. Pulse Time

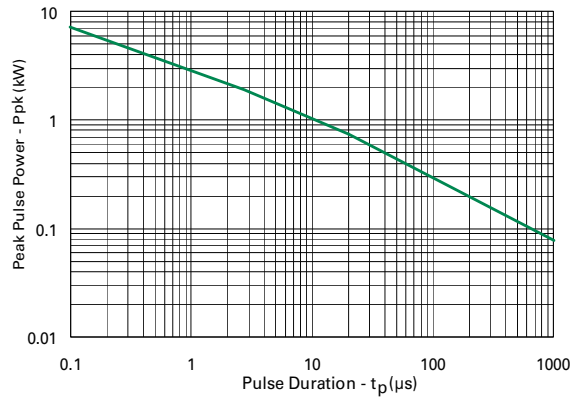


### Clamping Voltage vs $I_{PP}$ 8/20μS waveshape

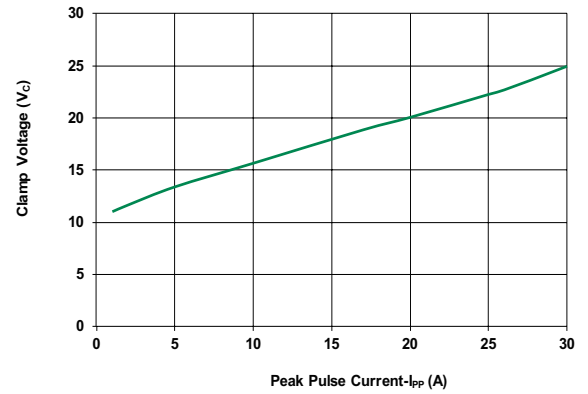


### Capacitance vs. Reverse Bias

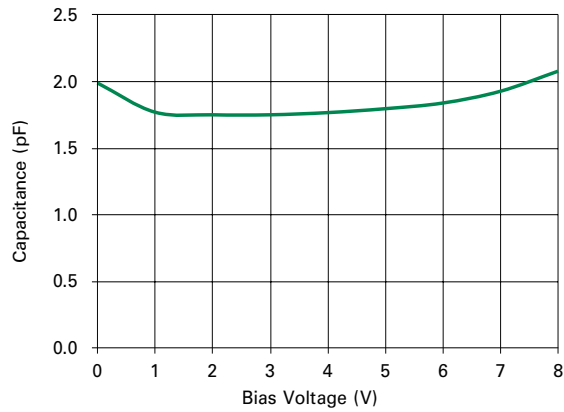

### IEC 61000-4-2 +8 kV Contact ESD Clamping Voltage

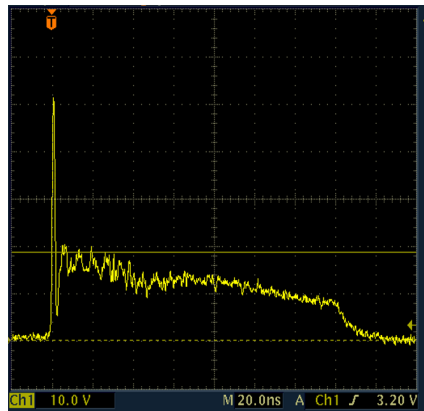


### IEC 61000-4-2 -8 kV Contact ESD Clamping Voltage

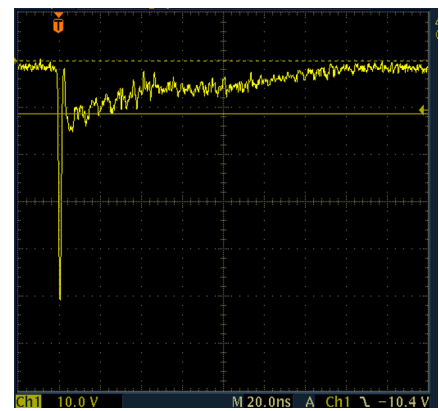

### Soldering Parameters

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus) Temp ( $T_L$ ) to peak |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_P$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate                                         |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_P$ )                |                                    | 8 minutes Max.          |
| Do not exceed                                          |                                    | 260°C                   |

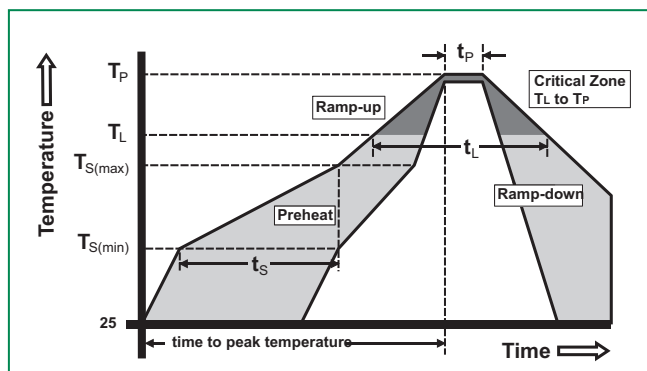

### Product Characteristics

|                           |                                                      |
|---------------------------|------------------------------------------------------|
| <b>Lead Plating</b>       | Matte Tin                                            |
| <b>Lead Material</b>      | Iron Alloy                                           |
| <b>Lead Coplanarity</b>   | 0.004 inches(0.102mm)                                |
| <b>Substrate material</b> | Silicon                                              |
| <b>Body Material</b>      | Molded Epoxy                                         |
| <b>Flammability</b>       | UL Recognized epoxy meeting flammability rating V-0. |

Notes :

1. All dimensions are in millimeters
2. Dimensions include solder plating.
3. Dimensions are exclusive of mold flash & metal burr.
4. Blo is facing up for mold and facing down for trim/form, i.e. reverse trim/form.
5. Package surface matte finish VDI 11-13.

### Part Marking System




A= Part Code  
X= Assembly site  
Y= Date code



B= Part Code  
X= Assembly site  
Y= Date code


### Part Numbering System

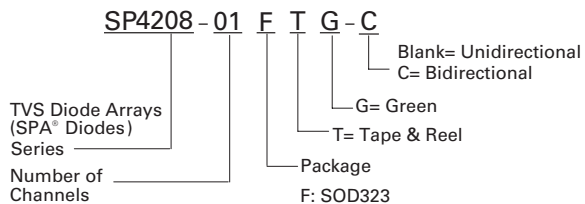

### Ordering Information


| Part Number    | Package | Marking | Min. Order Qty. |
|----------------|---------|---------|-----------------|
| SP4208-01FTG   | SOD323  | Axx     | 3000            |
| SP4208-01FTG-C | SOD323  | Bxx     | 3000            |

### Package Dimensions -SOD323

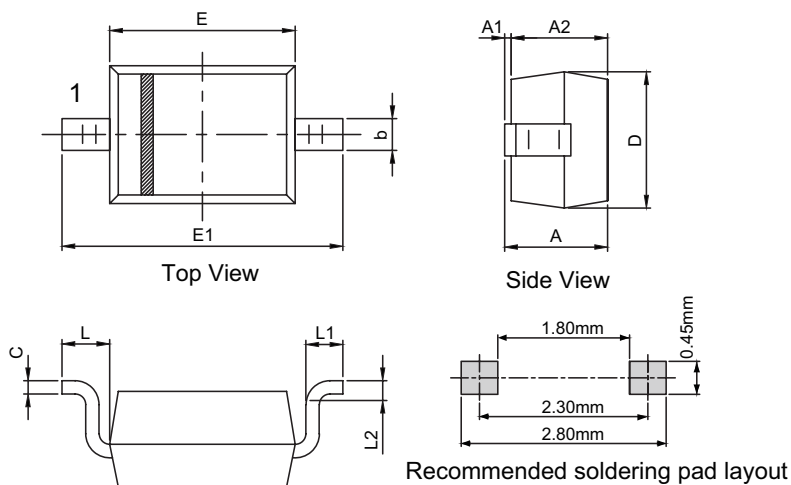

| Symbol    | Millimeters |      |      |
|-----------|-------------|------|------|
|           | Min         | Nor  | Max  |
| <b>A</b>  | 0.80        | 1.00 | 1.14 |
| <b>A1</b> | 0           | -    | 0.10 |
| <b>A2</b> | 0.80        | 0.95 | 1.04 |
| <b>b</b>  | 0.25        | 0.30 | 0.35 |
| <b>c</b>  | 0.08        | -    | 0.15 |
| <b>D</b>  | 1.15        | 1.30 | 1.45 |
| <b>E</b>  | 1.60        | 1.75 | 1.90 |
| <b>E1</b> | 2.44        | 2.55 | 2.75 |
| <b>L</b>  | 0.475 REF   |      |      |
| <b>L1</b> | 0.22        | 0.35 | 0.45 |
| <b>L2</b> | 0.20 BSC    |      |      |

### Embossed Carrier Tape & Reel Specification – SOD323

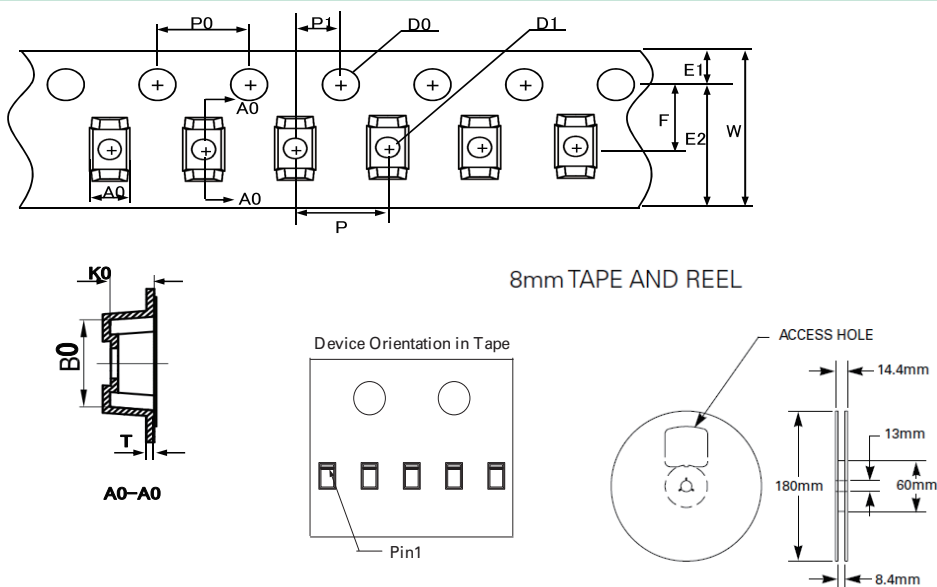

| Symbol    | Millimeters     |
|-----------|-----------------|
| <b>A0</b> | 1.46+/-0.10     |
| <b>B0</b> | 2.90+/-0.10     |
| <b>W</b>  | 8.0+0.3/-0.10   |
| <b>D0</b> | 1.50+0.10       |
| <b>D1</b> | 0.45min/1.15max |
| <b>E1</b> | 1.75+/-0.10     |
| <b>E2</b> | -               |
| <b>F</b>  | 3.50+/-0.10     |
| <b>P0</b> | 4.00+/-0.10     |
| <b>P</b>  | 4.00+/-0.10     |
| <b>P1</b> | 2.00+/-0.05     |
| <b>K0</b> | 1.25+/-0.10     |
| <b>T</b>  | 0.254+/-0.02    |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.