

SPF-S SILVER PLATED 10X38mm SOLAR FUSES

1000 Vdc • 1-30 A



Description

The SPF Solar Protection Fuse series has been specifically designed for the protection of photovoltaic (PV) systems. This family of Midget style fuses (10 x 38 mm) can safely protect PV modules and conductors from reverse-overcurrent conditions.

As PV systems have grown in size, so have the corresponding voltage requirements. This increase in system voltage has typically been intended to minimize power loss associated with long conductor runs. Standard circuit protection devices are not designed to completely protect photovoltaic panels. However, the SPF series is UL Listed to safely interrupt faulted circuits up to this demanding voltage level.

Features/Benefits

- UL 248-19 Listed
- Meets IEC 60269-6 performance requirements
- 1-30 A ratings available
- 20,000 A Interrupting Rating: 1A - 20A
- 50,000 A Interrupting Rating: 25A - 30A

Applications

- Inverters
- Combiner boxes
- Battery charge controllers

Recommended Fuse Holders

LPHV Series 1000 Vdc Dead-Front

Web Resources

Download technical documents: littelfuse.com/spfs

Specifications


| | |
|----------------------------|--|
| Voltage Rating | 1000 VDC |
| Amperage Rating | 1, 2, 3, 3.5, 4, 5, 6, 8, 10, 12, 15, 20, 25, 30 |
| Interrupting Rating | 20 kA: 1A - 20A 50 kA: 25A - 30A |
| Time Constant | ≤ 2ms |
| Material | Body: Melamine Caps: Copper Alloy (Silver Plated) |
| Approvals | UL 248-19 Listed (File: E339112) CSA Certified (File: 029862_0_000) |
| Environmental | RoHS Compliant |
| Country of Origin | Mexico |

Part Numbering System



| SERIES | AMP | PACKAGE QUANTITY | MOUNTING METHOD | CATALOG NUMBER | ORDERING NUMBER |
|--------|-----|------------------|-----------------|----------------|-----------------|
| SPF-S | 2 | 10 | FERRULE | SPF002-S | OSPF002.TXS |
| SPF-S | 3.5 | 10 | FERRULE | SPF03.5-S | OSPF03.5.TXS |

Dimensions Inches (mm)

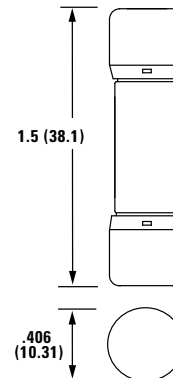

Look for this logo to indicate products that are used in solar applications. Visit our website littelfuse.com/solar for the latest updates on approvals, certifications, and new products.

SPF-S SILVER PLATED SERIES SOLAR FUSES


Ordering Information

| SERIES | AMPERAGE | AMP CODE | CATALOG NUMBER | PRODUCT MARKING | PACK QUANTITY | ORDERING NUMBER | UPC |
|--------|----------|----------|----------------|-----------------|---------------|-----------------|-------------|
| SPF-S | 1 | 001. | SPF001-S | SPF 1A-S | 10 | OSPF001.TXS | 07945884195 |
| | | | | | 100 | OSPF001.HXS | 07945884194 |
| SPF-S | 2 | 002. | SPF002-S | SPF 2A-S | 10 | OSPF002.TXS | 07945884197 |
| | | | | | 100 | OSPF002.HXS | 07945884196 |
| SPF-S | 3 | 003. | SPF003-S | SPF 3A-S | 10 | OSPF003.TXS | 07945884199 |
| | | | | | 100 | OSPF003.HXS | 07945884198 |
| SPF-S | 3.5 | 03.5 | SPF03.5-S | SPF 3 ½A-S | 10 | OSPF03.5TXS | 07945884219 |
| | | | | | 100 | OSPF03.5HXS | 07945884218 |
| SPF-S | 4 | 004. | SPF004-S | SPF 4A-S | 10 | OSPF004.TXS | 07945884201 |
| | | | | | 100 | OSPF004.HXS | 07945884298 |
| SPF-S | 5 | 005. | SPF005-S | SPF 5A-S | 10 | OSPF005.TXS | 07945884203 |
| | | | | | 100 | OSPF005.HXS | 07945884202 |
| SPF-S | 6 | 006. | SPF006-S | SPF 6A-S | 10 | OSPF006.TXS | 07945884205 |
| | | | | | 100 | OSPF006.HXS | 07945884204 |
| SPF-S | 8 | 008. | SPF008-S | SPF 8A-S | 10 | OSPF008.TXS | 07945884207 |
| | | | | | 100 | OSPF008.HXS | 07945884206 |
| SPF-S | 10 | 010. | SPF010-S | SPF 10A-S | 10 | OSPF010.TXS | 07945884209 |
| | | | | | 100 | OSPF010.HXS | 07945884208 |
| SPF-S | 12 | 012. | SPF012-S | SPF 12A-S | 10 | OSPF012.TXS | 07945884211 |
| | | | | | 100 | OSPF012.HXS | 07945884210 |
| SPF-S | 15 | 015. | SPF015-S | SPF 15A-S | 10 | OSPF015.TXS | 07945884213 |
| | | | | | 100 | OSPF015.HXS | 07945884212 |
| SPF-S | 20 | 020. | SPF020-S | SPF 20A-S | 10 | OSPF020.TXS | 07945884215 |
| | | | | | 100 | OSPF020.HXS | 07945884214 |
| SPF-S | 25 | 025. | SPF025-S | SPF 25A-S | 10 | OSPF025.TXS | 07945884217 |
| | | | | | 100 | OSPF025.HXS | 07945884216 |
| SPF-S | 30 | 030. | SPF030-S | SPF 30A-S | 10 | OSPF030.TXS | 07945884221 |
| | | | | | 100 | OSPF030.HXS | 07945884220 |

Electrical Specification — Agency Requirements

| AMPERAGE RATING | OPENING TIME (MINUTES) | | | | |
|-----------------|---------------------------|----------------------------|---------------------------|----------------------------|---------------------------|
| | 100% of Amp Rating per UL | 113% of Amp Rating per IEC | 135% of Amp Rating per UL | 145% of Amp Rating per IEC | 200% of Amp Rating per UL |
| 1-30 | Temperature Stabilization | 60 Min | 60 Max | 60 Max | 4 Max |

Temperature Derating Curve (Temperature of Air Immediately Surrounding Fuse)

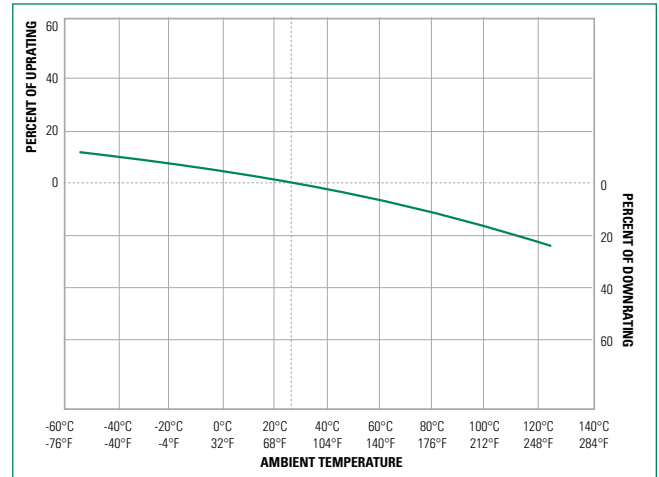


SPF-S SILVER PLATED SERIES SOLAR FUSES


Electrical Specifications

| AMPERAGE | VOLTAGE | INTERRUPTING RATING (kA) | NOM COLD RESISTANCE (ohm) | WATTS LOSS AT 100% RATED CURRENT (W) | WATTS LOSS AT 80% RATED CURRENT (W) | TOTAL CLEARING I ² t (A ² s) 20 kA | TOTAL CLEARING I ² t (A ² s) 50 kA |
|----------|---------|--------------------------|---------------------------|--------------------------------------|-------------------------------------|--|--|
| | DC | DC | | | | | |
| 1 | 1000 | 20kA DC | 0.394 | 0.60 | 0.41 | 0.6 | — |
| 2 | 1000 | 20kA DC | 0.237 | 1.59 | 0.85 | 5 | — |
| 3 | 1000 | 20kA DC | 0.11 | 1.50 | 0.82 | 7.9 | — |
| 3.5 | 1000 | 20kA DC | 0.07787 | 1.37 | 0.78 | 11 | — |
| 4 | 1000 | 20kA DC | 0.06127 | 1.49 | 0.84 | 23 | — |
| 5 | 1000 | 20kA DC | 0.04086 | 1.47 | 0.86 | 43 | — |
| 6 | 1000 | 20kA DC | 0.0281 | 1.35 | 0.77 | 80 | — |
| 8 | 1000 | 20kA DC | 0.0178 | 1.61 | 0.91 | 199 | — |
| 10 | 1000 | 20kA DC | 0.0125 | 1.76 | 1.00 | 401 | — |
| 12 | 1000 | 20kA DC | 0.00993 | 1.97 | 1.11 | 642 | — |
| 15 | 1000 | 20kA DC | .007855 | 2.28 | 1.38 | 505 | — |
| 20 | 1000 | 20kA DC | 0.0045 | 2.81 | 1.57 | 1313 | — |
| 25 | 1000 | 50kA DC | 0.00370 | 3.331 | 1.878 | 2141 | 2433 |
| 30 | 1000 | 50kA DC | 0.00299 | 3.845 | 2.147 | 3290 | 3810 |

Time Current Curve (1-12 A)

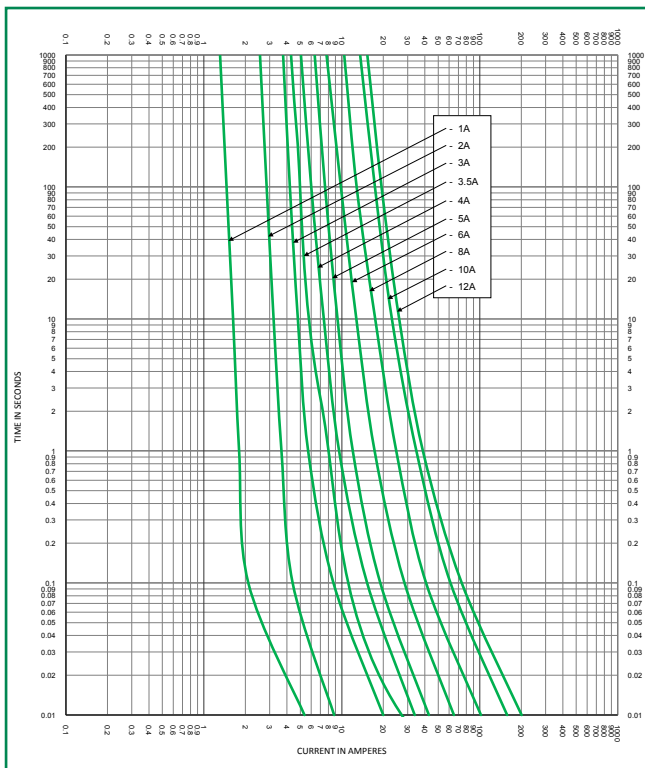


Time Current Curve (15-20 A)

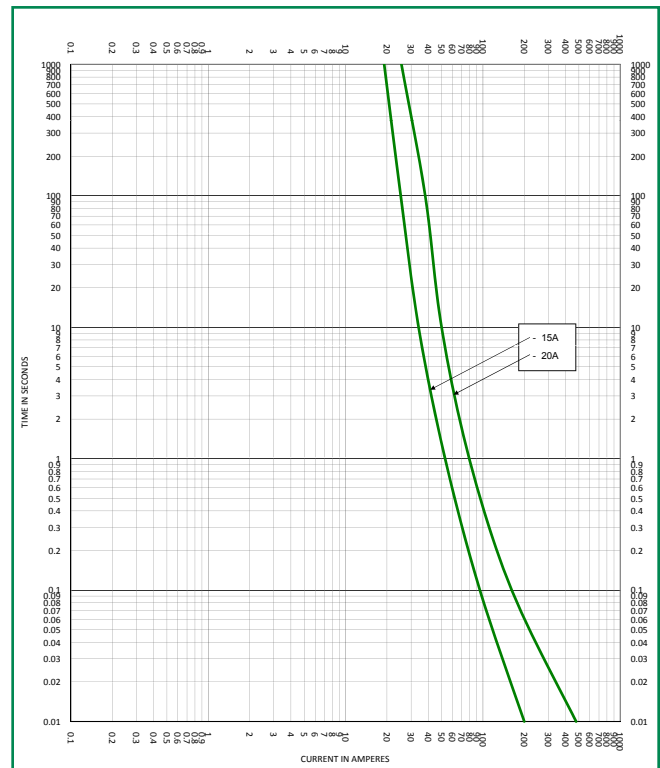

SPF-S SILVER PLATED SERIES SOLAR FUSES

Time Current Curve (25-30 A)

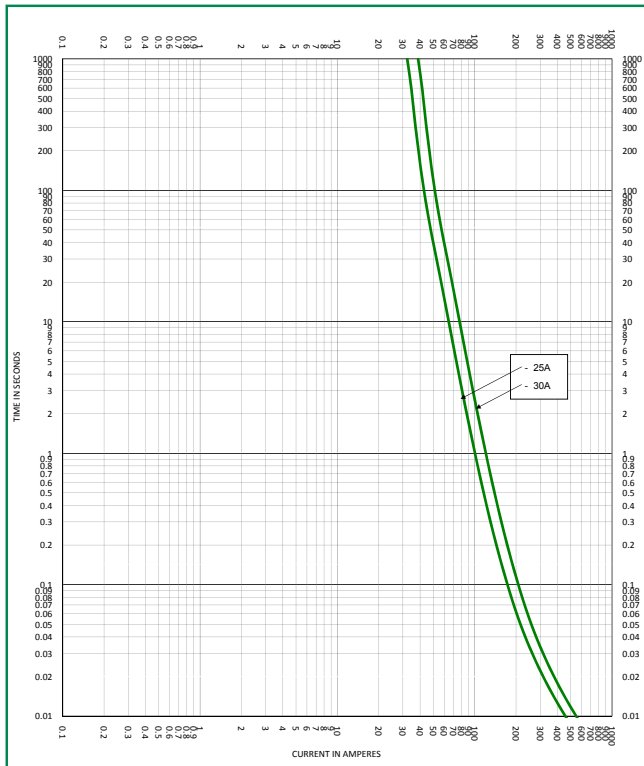



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.