

# Keysight N2744A

## T2A Probe Interface Adapter

### Key features

- Enables TekProbe-BNC™ level II probes to connect to Keysight's AutoProbe interface on InfiniiVision 3000X/T, 4000X, 6000X, 5000, 6000, 7000 and Infiniium S-Series, 9000, 90000 oscilloscopes
- An easy-to-use plug-on adapter to the Keysight oscilloscope's AutoProbe interface
- Provides necessary probe power, offset control and calibration as needed to the attached TekProbe probe

The Keysight Technologies, Inc. N2744A T2A interface adapter enables selected Tektronix TekProbe interface level II probes to be used with Keysight oscilloscopes with the AutoProbe interface. Existing TekProbe-BNC probe types can simply be plugged into the T2A adapter which is then plugged directly into any AutoProbe input channel on an InfiniiVision or Infiniium oscilloscope. Select the probe model in the scope menu and the Keysight oscilloscope sets up the attenuation factor and the probe type automatically. The T2A interface adapter supplies the necessary probe power and offset control as used by the connected TekProbe probe. The adapter is targeted for customers using both Tek active probes with TekProbe-BNC level II interfaces and Keysight oscilloscopes with the AutoProbe interface.



## Tek probe compatibility

- The N2744A T2A adapter supports only the probes listed below with TekProbe interfaces

## Current probe

- TCP202 50 MHz AC/DC current probe

## Single-ended active probes


- P6205 single-ended active probe, 750 MHz, 10:1 without offset control
- P6243 single-ended active probe, 1 GHz, 10:1 without offset control
- P6245 single-ended active probe, 1.5 GHz, 10:1 with offset control
- P6241 single-ended active probe, 4 GHz, 10:1 with offset control
- P6249 single-ended active probe, 4 GHz, 10:1 with offset control

## Differential active probes

- P5205/P5205A differential probe, 100 MHz, 50:1/500:1 with offset control (works with InfiniiVision 3000X, 4000X, 5000, 6000 and 7000 Series oscilloscopes/Choose P5205 in the listing when you use P5205A)
- P5210/P5210A differential probe, 50 MHz, 100:1/1000:1 with offset control (works with InfiniiVision 3000X, 4000X, 5000, 6000 and 7000 Series oscilloscopes/Choose the P5210 in the listing when you use P5210A)
- P6246 differential probe, 400 MHz, 10:1/1:1 with offset control
- P6247 differential probe, 1 GHz, 10:1/1:1 with offset control
- P6248 differential probe, 1.5 GHz, 10:1/1:1 with offset control
- P6250 differential probe, 500 MHz, 50:1/5:1 with offset control
- P6251 differential probe, 1 GHz, 50:1/5:1 with offset control

## Optical-to-electrical converters

- P6701B 1 GHz optical-to-electrical converter with FC/PC connector
- P6703B 1.2 GHz optical-to-electrical converter with FC/PC connector
- P6711 250 MHz optical-to-electrical converter
- P6713 300 MHz optical-to-electrical converter

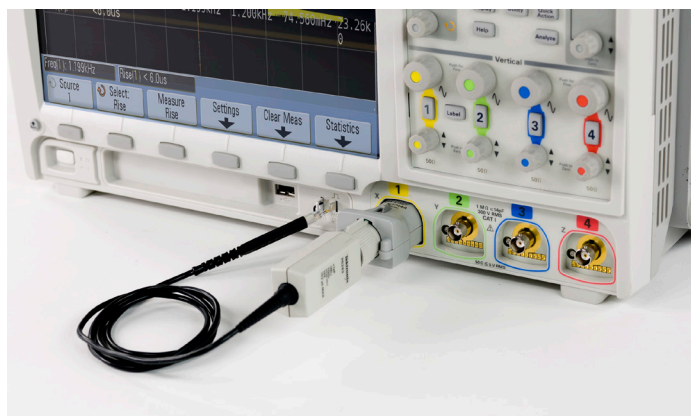

## Keysight scope compatibility

- Keysight InfiniiVision 3000X/T, 4000X, 6000X Series
- Keysight Infiniium S-Series
- Keysight InfiniiVision 5000, 6000, and 7000 Series (except 6000 100 MHz) with software version 06.16 or higher
- Keysight Infiniium 9000 and 90000 Series with software version 03.11 or higher
- Keysight Infiniium V-Series and 90000 X-Series with software version 03.11 or higher and N5442A InfiniiMax III 50 Ω adapter

## Performance characteristics

Electrical	
Bandwidth	4 GHz (adapter only)
Power supplies	+15 V, -15 V, +5 V, -5 V (each 2%)
Max output current	200 mA for positive and negative supplies
Offset control range	± 1 V (from the adapter)
Max input voltage	42 Vpk, 30 Vrms

## Environmental

- Operating temperature range: 0 to 50 °C
- Non-operating temperature range: -40 to 70 °C
- Humidity: 95% RH at 50 °C
- Altitude: 4.000 m

## Physical

- 37 mm W x 29.5 mm L x 58 mm D
- Weight: 45 g

TEKTRONIX, TEK, and TEKPROBE are registered trademarks of Tektronix, Inc.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

This information is subject to change without notice.  
 © Keysight Technologies, 2011 - 2017  
 Published in USA, January 13, 2017  
 5990-6477EN  
[www.keysight.com](http://www.keysight.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.