

FEATURES

- ◆ Efficiency up to 83%
- ◆ SMD Package with Industry Standard Pinout
- ◆ Isolation Voltage 1500VDC
- ◆ 2:1 Wide Input Range
- ◆ Low ripple and noise
- ◆ Short Circuit Protection
- ◆ Temperature Performance -40°C to +71°C
- ◆ CSA60950-1 Safety Approval
- ◆ > 1MHours MTBF
- ◆ Lead free, RoHs Compliant
- ◆ 3 Years Product Warranty



The SE03S/D series are miniature, SMD Package, isolated 3W DC/DC converters with 1,500VDC isolation. The SE03S/D series features fully regulated output and ultra wide 2:1 input voltage ranges. It offers short circuit protection and allows a wide operating temperature range of -40°C to +71°C. These isolated DC/DC converters are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc.

Model List

| Model Number | Input Voltage (Range) VDC | Output Voltage VDC | Output Current | | Input Current | | Reflected Ripple Current mA(typ.) | Max. capacitive Load uF | Efficiency (typ.) @Max. Load % |
|--------------|------------------------------|-----------------------|----------------|------------|------------------------|----------------------|--------------------------------------|----------------------------|--------------------------------------|
| | | | Max. mA | Min. mA | @Max. Load mA(typ.) | @No Load mA(typ.) | | | |
| | | | | | | | | | |
| SE03S1203A | 12 (9 ~ 18) | 3.3 | 700 | 70 | 257 | 20 | 25 | 4700 | 75 |
| SE03S1205A | | 5 | 600 | 60 | 316 | | | | 79 |
| SE03S1212A | | 12 | 250 | 25 | 305 | | | | 82 |
| SE03S1215A | | 15 | 200 | 20 | 305 | | | | 82 |
| SE03D1205A | | ±5 | ±300 | ±30 | 321 | | | 180* | 78 |
| SE03D1212A | | ±12 | ±125 | ±12.5 | 309 | | | | 81 |
| SE03D1215A | | ±15 | ±100 | ±10 | 309 | | | | 81 |
| SE03S2403A | 24 (18 ~ 36) | 3.3 | 700 | 70 | 127 | 5 | 15 | 4700 | 76 |
| SE03S2405A | | 5 | 600 | 60 | 156 | | | | 80 |
| SE03S2412A | | 12 | 250 | 25 | 151 | | | | 83 |
| SE03S2415A | | 15 | 200 | 20 | 151 | | | | 83 |
| SE03D2405A | | ±5 | ±300 | ±30 | 158 | | | 180* | 79 |
| SE03D2412A | | ±12 | ±125 | ±12.5 | 152 | | | | 82 |
| SE03D2415A | | ±15 | ±100 | ±10 | 152 | | | | 82 |
| SE03S4803A | 48 (36 ~ 75) | 3.3 | 700 | 70 | 63 | 3 | 10 | 4700 | 76 |
| SE03S4805A | | 5 | 600 | 60 | 78 | | | | 80 |
| SE03S4812A | | 12 | 250 | 25 | 75 | | | | 83 |
| SE03S4815A | | 15 | 200 | 20 | 75 | | | | 83 |
| SE03D4805A | | ±5 | ±300 | ±30 | 79 | | | 180* | 79 |
| SE03D4812A | | ±12 | ±125 | ±12.5 | 76 | | | | 82 |
| SE03D4815A | | ±15 | ±100 | ±10 | 76 | | | | 82 |

* For each output

Input Characteristics

| Parameter | Model | Min. | Typ. | Max. | Unit |
|-----------------------------------|------------------|-----------|------|------|------|
| Input Surge Voltage (1 sec. max.) | 12V Input Models | -0.7 | --- | 25 | VDC |
| | 24V Input Models | -0.7 | --- | 50 | |
| | 48V Input Models | -0.7 | --- | 100 | |
| Start-Up Voltage | 12V Input Models | 4.5 | 6 | 8 | |
| | 24V Input Models | 8 | 12 | 18 | |
| | 48V Input Models | 16 | 24 | 36 | |
| Under Voltage Shutdown | 12V Input Models | --- | --- | 8 | |
| | 24V Input Models | --- | --- | 16 | |
| | 48V Input Models | --- | --- | 32 | |
| Reverse Polarity Input Current | All Models | --- | --- | 0.5 | A |
| Short Circuit Input Power | | --- | --- | 1500 | mW |
| Input Filter | | Pi Filter | | | |
| Internal Power Dissipation | | --- | --- | 2500 | mW |

Output Characteristics

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|------------------------------|-----------------------------|------------|-------|-------|-------------------|
| Output Voltage Accuracy | | --- | ±0.5 | ±1.0 | % |
| Output Voltage Balance | Dual Output, Balanced Loads | --- | ±0.5 | ±2.0 | % |
| Line Regulation | Vin=Min. to Max. | --- | ±0.1 | ±0.3 | % |
| Load Regulation | Io=10% to 100% | --- | ±0.3 | ±1.0 | % |
| Ripple & Noise (20MHz) | | --- | 50 | 75 | mV _{P-P} |
| Ripple & Noise (20MHz) | Over Line, Load & Temp. | --- | --- | 100 | mV _{P-P} |
| Ripple & Noise (20MHz) | | --- | --- | 10 | mV rms |
| Transient Recovery Time | 25% Load Step Change | --- | 200 | 500 | uS |
| Transient Response Deviation | | --- | ±2 | ±6 | % |
| Temperature Coefficient | | --- | ±0.01 | ±0.02 | %/°C |
| Short Circuit Protection | | Continuous | | | |

General Characteristics

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|----------------------------------|-----------------------------------|-----------|------|------|-------|
| I/O Isolation Voltage (rated) | 60 Seconds | 1500 | --- | --- | VDC |
| I/O Isolation Resistance | 500 VDC | 1000 | --- | --- | MΩ |
| I/O Isolation Capacitance | 100KHz, 1V | --- | 65 | 100 | pF |
| Switching Frequency | | --- | 300 | --- | KHz |
| MTBF (calculated) | MIL-HDBK-217F@25°C, Ground Benign | 1,000,000 | --- | --- | Hours |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D | Level 2 | | | |


Recommended Input Fuse

| 12V Input Models | 24V Input Models | 48V Input Models |
|----------------------|----------------------|----------------------|
| 750mA Slow-Blow Type | 350mA Slow-Blow Type | 200mA Slow-Blow Type |

Environmental Specifications

| Parameter | Conditions | Min. | Max. | Unit |
|---|---------------------|------|------|----------|
| Operating Temperature Range (with Derating) | Ambient | -40 | +85 | °C |
| Case Temperature | | --- | +90 | °C |
| Storage Temperature Range | | -50 | +125 | °C |
| Humidity (non condensing) | | --- | 95 | % rel. H |
| Cooling | Free-Air convection | | | |
| Lead Temperature (1.5mm from case for 10Sec.) | | --- | 260 | °C |

Power Derating Curve

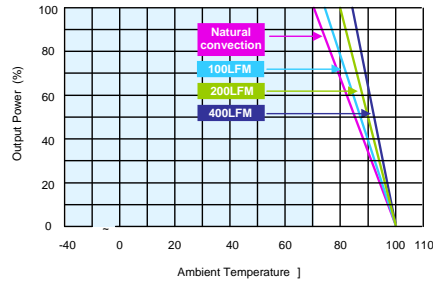

Notes


- 1 Specifications typical at $T_a = +25^\circ\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement bandwidth is 0-20MHz.
- 4 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 5 All DC/DC converters should be externally fused at the front end for protection.
- 6 Specifications subject to change without notice.
- 7 It is not recommended to use water-washing process on SMT units.

Mechanical Drawing

Mechanical Dimensions



Connecting Pin Patterns

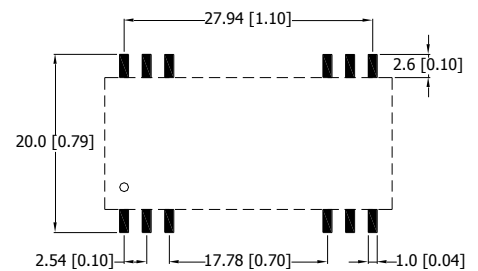

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: $X.X \pm 0.25$ ($X.XX \pm 0.01$)
 $X.XX \pm 0.13$ ($X.XXX \pm 0.005$)
- ▶ Pins ± 0.05 (± 0.002)

Pin Connections

| Pin | Single Output | Dual Output |
|------------|---------------|-------------|
| 1,2 | -Vin | -Vin |
| 3,11,14,22 | NC | NC |
| 10 | NC | Common |
| 12 | NC | -Vout |
| 13 | +Vout | +Vout |
| 15 | -Vout | Common |
| 23,24 | +Vin | +Vin |

NC : No Connection

Physical Characteristics

| | |
|---------------|---|
| Case Size | : 32.3x14.8x10.2mm (1.27x0.58x0.4 Inches) |
| Case Material | : Non-Conductive Black Plastic |
| | : (flammability to UL 94V-0 rated) |
| Weight | : 8.8g |



| Part Numbering System | | | | | | |
|-----------------------|---------------|-------|-------------------|---------------|----------------|--------------------|
| S | E | 03 | S | 12 | 05 | A |
| Form factor | Family series | Watt | Number of Outputs | Input Voltage | Output Voltage | Option Code |
| D-DIP | A-Z | 01:1W | S - Single | 03:3.3V | 03:3.3V | A - Std. Functions |
| P-SIP | | 02:2W | D- Dual | 05: 5V | 05: 5V | |
| S-SMD | | 03:3W | | 12:12V | 12:12V | |
| | | 04:4W | | 24: 24V | 15: 15V | |
| | | 06:6W | | 48:48V | 24: 24V | |

WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.