


FIXED CARBON COMPOSITION RESISTORS

KAMAYA OHM

RC

●Features

- 1. Improved pulse endurance characteristics compared to carbon-film devices.
- 2. Wide resistance range is available, 1 ohm ~ 22M ohm.
- 3. Stability Class : 10%

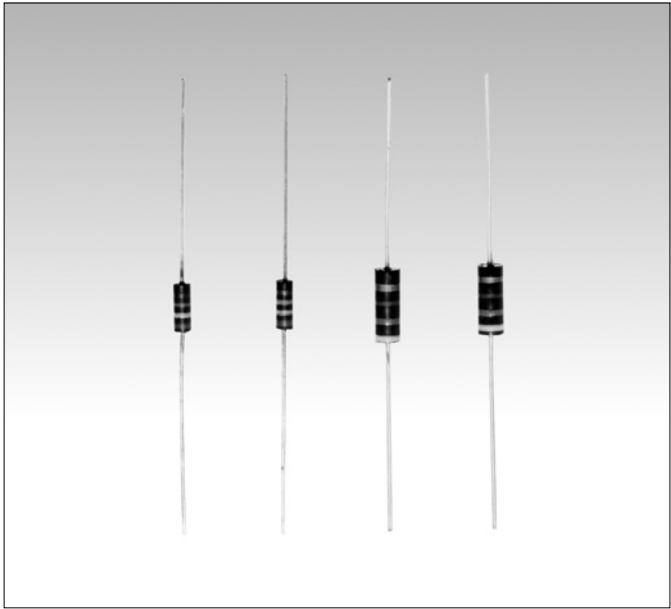

●Dimensions

Unit : mm

| Style | L                                   | D       | H    | d                                     | *Unit weight/pc. |
|-------|-------------------------------------|---------|------|---------------------------------------|------------------|
| RC1/4 | 6.3 ±0.7                            | 2.4±0.1 | 30±3 | 0.6 ±0.05                             | 222mg            |
| RC1/2 | 9.5 <sup>+0.8</sup> <sub>-0.7</sub> | 3.6±0.2 | 28±3 | 0.7 <sup>+0.07</sup> <sub>-0.05</sub> | 422mg            |

\*Values for reference

●Part Number Description

Example

Style

RC1/4

Product Type

Rated Dissipation

1/4 0.25W

1/2 0.5W

102

Rated Resistance

E24, 12, 6 Series

e.g. : 2R2=2.2 ohm

102=1k ohm

J

Tolerance on Rated Resistance

J ±5%

K ±10%

M ±20%

B

\*Packaging

B Bulk (Straight)

H Horizontal Forming

TB 52 mm Width Tape (Ammo Box)

TD 52 mm Width Tape (Reel)

\*Refer to Tape and Packaging information on pages 66.

## FIXED CARBON COMPOSITION RESISTORS

RC

## ●Ratings

| Style | Rated Dissipation<br>at 70°C<br>W | Limiting Element<br>Voltage<br>V | Rated Resistance<br>Range | Combination of Rated Resistance Range and Temperature Coefficient of Resistance |                          |                                                              | Tolerance on Rated Resistance and<br>Perferred Number Series for Resistors | Isolation<br>Voltage<br>V | Category Temperature<br>Range<br>°C |
|-------|-----------------------------------|----------------------------------|---------------------------|---------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------|----------------------------------------------------------------------------|---------------------------|-------------------------------------|
|       |                                   |                                  |                           | Temperature Coefficient of Resistance %                                         |                          | Rated Resistance<br>Range                                    |                                                                            |                           |                                     |
|       |                                   |                                  |                           | at -55 °C                                                                       | at +125 °C               |                                                              |                                                                            |                           |                                     |
| RC1/4 | 0.25                              | 250                              | 1 ohm~5.6M ohm            | +6.5 ~0<br>+10 ~0                                                               | +1~-5<br>0~-6            | 1 ohm ~ 1k ohm<br>1.1k ohm ~ 10k ohm                         | J ( ± 5%)<br>: E24<br>K ( ± 10%)<br>: E12<br>M( ± 20%)<br>: E6             | 100                       | -55~+125                            |
| RC1/2 | 0.5                               | 350                              | 1 ohm~22M ohm             | +13 ~0<br>+15 ~0<br>+20 ~0                                                      | 0~-7.5<br>0~-10<br>0~-15 | 11k ohm ~100k ohm<br>110k ohm ~ 1M ohm<br>1.1M ohm ~ 22M ohm |                                                                            | 500                       |                                     |

Note1. Rated Voltage =  $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$ . (d.c. or a.c. r.m.s. Voltage)

Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.

Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

## ●Storage

Temperature 20±15°C, Humidity 60%R.H. Max, Recommendation Storing Term 6 months after shipped from factory.

## ●Derating Curve

The derated values of dissipation for temperatures in excess of 70°C shall be indicated by the following Curve.

## ●Climatic Category

55/125/56

|                                              |         |
|----------------------------------------------|---------|
| Lower Category Temperature                   | -55°C   |
| Upper Category Temperature                   | +125°C  |
| Duration of the Damp heat, Steady-State Test | 56 days |



## ●Performance Characteristics JIS C 5201-1 : 1998

| Description                                 | Requirements                                                                                                                        | Test Methods                                                                                                                                        |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage proof                               | No breakdown or flashover                                                                                                           | Clause 4.7 V-block method RC1/4 100V a.c., 60s<br>RC1/2 500V a.c., 60s                                                                              |
| Variation of resistance with temperature    | See Ratings Table                                                                                                                   | Clause 4.8 Measuring temperature : +20°C/-55°C/<br>+20°C/+125°C/+20°C                                                                               |
| Overload                                    | $\Delta R \leq \pm(2\% + 0.1 \text{ ohm})$<br>No visible damage, legible marking                                                    | Clause 4.13 The applied voltage shall be 2.5 times of the rated voltage or twice of the limiting element voltage, whichever is the less Severe, 5s. |
| Robustness of terminations                  | Tensile $\Delta R \leq \pm(2\% + 0.1 \text{ ohm})$ No visible damage                                                                | Clause 4.16.2 10N for 5~10s                                                                                                                         |
|                                             | Bending $\Delta R \leq \pm(2\% + 0.1 \text{ ohm})$ No visible damage                                                                | Clause 4.16.3 5N twice                                                                                                                              |
|                                             | Torsion $\Delta R \leq \pm(2\% + 0.1 \text{ ohm})$ No visible damage                                                                | Clause 4.16.4 180°C, 2 rotation                                                                                                                     |
| Solderability                               | In accordance with Clause 4.17.4.5                                                                                                  | Clause 4.17 235°C, 5s                                                                                                                               |
| Resistance to soldering heat                | $\Delta R \leq \pm(3\% + 0.1 \text{ ohm})$<br>No visible damage, legible marking                                                    | Clause 4.18 After immersion into the flux, the immersion into solder shall be carried out 4mm from the body at 350°C for 3.5s.                      |
| Rapid change of temperature                 | $\Delta R \leq \pm(2\% + 0.1 \text{ ohm})$ No visible damage                                                                        | Clause 4.19 5 cycles between -55°C and +125°C.                                                                                                      |
| Climatic sequence                           | $\Delta R \leq \pm(10\% + 0.5 \text{ ohm})$ Insulation resistance : $R \geq 100M \text{ ohm}$<br>No visible damage                  | Clause 4.23 Dry/Damp heat(12+12h cycle), first cycle./<br>Cold/Damp heat(12+12h cycle), remaining cycle./<br>D.C.Load.                              |
| Damp test, steady state                     | $\Delta R \leq \pm(10\% + 0.5 \text{ ohm})$ Insulation resistance : $R \geq 100M \text{ ohm}$<br>No visible damage, legible marking | Clause 4.24 40°C, 95%R.H., 56 days, test a) , b) and c) of Clause 4.24.2.1                                                                          |
| Endurance at 70°C                           | $\Delta R \leq \pm(10\% + 0.5 \text{ ohm})$ No visible damage<br>Insulation resistance : $R \geq 1G \text{ ohm}$                    | Clause 4.25.1 Rated voltage, 1.5h "ON", 0.5h "OFF",<br>70°C, 1,000h.                                                                                |
| Endurance at the upper category temperature | $\Delta R \leq \pm(10\% + 0.5 \text{ ohm})$ No visible damage<br>Insulation resistance : $R \geq 1G \text{ ohm}$                    | Clause 4.25.3 125°C, no-load, 1,000h.                                                                                                               |



## FIXED CARBON COMPOSITION RESISTORS

RC


## ●Typical Characteristics

## ●Surge Resistance Characteristics


Charging and discharging a 2,000 pF capacitor for 100 cycles.

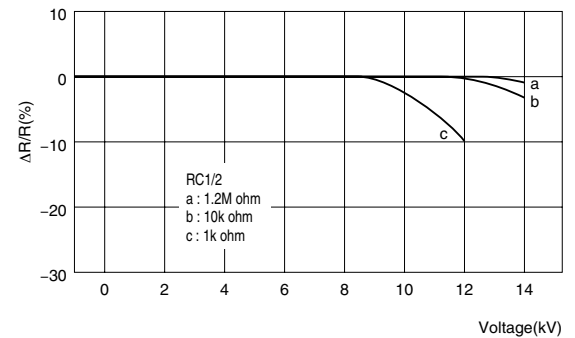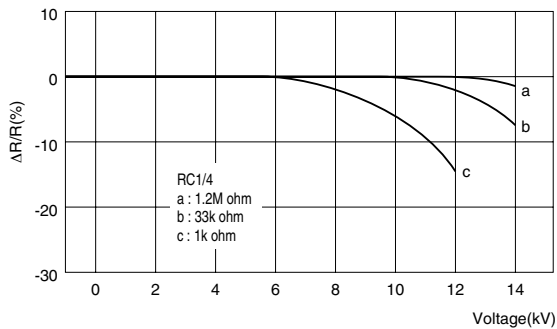

## ●Relationship between Load Ratio and Category Temperature

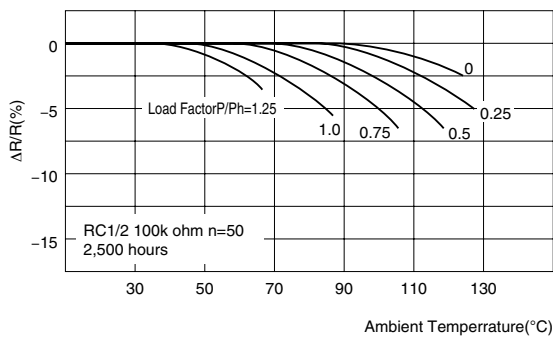


## ●Endurance at 70°C

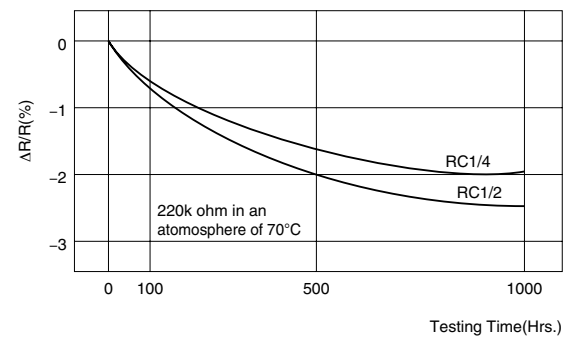


## ●Variation with Time

Condition : 5~35°C , 45~85% R.H.

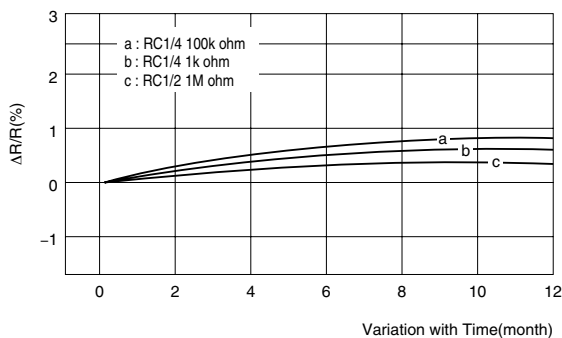

## ●Frequency Characteristics

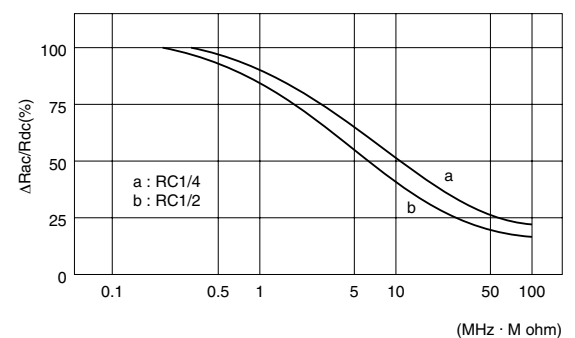

## ●Reliability Test

## Endurance in humidity

Samples : RC1/4J, 100 ohm, 1k ohm, 10k ohm, 100k ohm×150 each. Total 2,400.

Conditions : Direct current voltage equivalent to the following load ratings in cycles on "ON" for 1.5h and "OFF" for 0.5h for a total of 5,000h in an atmosphere of 40°C, 90 to 95%R.H.

"Typical characteristics indicate the mean values of  $\Delta R/R$  etc."

| Criterion (%) |         | Load Ratio P/Pn (%) | Total Testing Time T(Hrs. ) | Number of Failures r(pcs.) | Failure Ratio   |                      | Average Lifetime (60% reliability level) (Hrs.) |
|---------------|---------|---------------------|-----------------------------|----------------------------|-----------------|----------------------|-------------------------------------------------|
|               |         |                     |                             |                            | $\hat{\lambda}$ | $\lambda_{CL}(60\%)$ |                                                 |
| $\Delta R/R$  | $\pm 5$ | 0                   | 2.984X10 <sup>6</sup>       | 6                          | 0.201           | 0.244                | 4.098×10 <sup>5</sup>                           |
|               |         | 20                  | 2.990X10 <sup>6</sup>       | 4                          | 0.134           | 0.176                | 5.682×10 <sup>5</sup>                           |
|               |         | 60                  | 2.997X10 <sup>6</sup>       | 2                          | 0.067           | 0.104                | 9.615×10 <sup>5</sup>                           |
|               |         | 100                 | 2.992X10 <sup>6</sup>       | 3                          | 0.100           | 0.139                | 7.194×10 <sup>5</sup>                           |
|               |         | Total               | 1.196X10 <sup>7</sup>       | 15                         | 0.125           | 0.138                | 7.209×10 <sup>5</sup>                           |
|               | +10     | Total               | 1.20X10 <sup>7</sup>        | 0                          | 0.0055          | 0.007                | 1.299×10 <sup>7</sup>                           |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.