



SIPMOS® Small-Signal-Transistor
Feature

- P-Channel
- Enhancement mode
- Avalanche rated
- dv/dt rated
- Pb-free lead plating; RoHS compliant

Product Summary

V_{DS}	-100	V
$R_{DS(on)}$	0.24	Ω
I_D	-15	A

PG-TO220-3-1



Type	Package	Marking
SPP15P10P	PG-TO220-3-1	15P10P

Maximum Ratings, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current $T_C=25^\circ\text{C}$ $T_C=100^\circ\text{C}$	I_D	-15 -10.6	A
Pulsed drain current $T_C=25^\circ\text{C}$	$I_{D \text{ puls}}$	-60	
Avalanche energy, single pulse $I_D=-15 \text{ A}$, $V_{DD}=-25\text{V}$, $R_{GS}=25\Omega$	E_{AS}	230	mJ
Reverse diode dv/dt $I_S=-15\text{A}$, $V_{DS}=-48\text{V}$, $di/dt=-200\text{A}/\mu\text{s}$, $T_{j\text{max}}=150^\circ\text{C}$	dv/dt	6	kV/ μs
Gate source voltage	V_{GS}	± 20	V
Power dissipation $T_C=25^\circ\text{C}$	P_{tot}	128	W
Operating and storage temperature	T_j, T_{stg}	-55... +175	$^\circ\text{C}$
IEC climatic category; DIN IEC 68-1		55/175/56	

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-	-	1.17	K/W
SMD version, device on PCB:	R_{thJA}				
@ min. footprint		-	-	75	
@ 6 cm ² cooling area ¹⁾		-	-	45	

Electrical Characteristics, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain-source breakdown voltage $V_{GS}=0, I_D=-250\mu A$	$V_{(BR)DSS}$	-100	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D=-1.54mA$	$V_{GS(th)}$	-4	-3	-2.1	
Zero gate voltage drain current $V_{DS}=-100V, V_{GS}=0, T_j=25^{\circ}C$ $V_{DS}=-100V, V_{GS}=0, T_j=150^{\circ}C$	I_{DSS}	-	-0.1 -10	-1 -100	μA
Gate-source leakage current $V_{GS}=-20V, V_{DS}=0$	I_{GSS}	-	-10	-100	
Drain-source on-state resistance $V_{GS}=-10V, I_D=-10.6A$	$R_{DS(on)}$	-	0.18	0.24	Ω

¹⁾Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at $T_j = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic Characteristics

Transconductance	g_{fs}	$ V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$ $I_D = -10.7\text{A}$	4.7	9.3	-	S
Input capacitance	C_{iss}	$V_{GS} = 0, V_{DS} = -25\text{V},$ $f = 1\text{MHz}$	-	944	1180	pF
Output capacitance	C_{oss}		-	226	283	
Reverse transfer capacitance	C_{rss}		-	91	114	
Turn-on delay time	$t_{d(on)}$	$V_{DD} = -50\text{V}, V_{GS} = -10\text{V},$ $I_D = -15\text{A}, R_G = 6\Omega$	-	8.9	13.4	ns
Rise time	t_r		-	30	45	
Turn-off delay time	$t_{d(off)}$		-	35	53	
Fall time	t_f		-	22	33	

Gate Charge Characteristics


Gate to source charge	Q_{gs}	$V_{DD} = -80\text{V}, I_D = -15\text{A}$	-	-4.5	-6.7	nC
Gate to drain charge	Q_{gd}		-	-15.3	-23	
Gate charge total	Q_g	$V_{DD} = -80\text{V}, I_D = -15\text{A},$ $V_{GS} = 0 \text{ to } -10\text{V}$	-	-33.4	-50	
Gate plateau voltage	$V_{(plateau)}$	$V_{DD} = -80\text{V}, I_D = -15\text{A}$	-	-5.7	-	V

Reverse Diode

Inverse diode continuous forward current	I_S	$T_A = 25^{\circ}\text{C}$	-	-	-15	A
Inv. diode direct current, pulsed	I_{SM}		-	-	-60	
Inverse diode forward voltage	V_{SD}	$V_{GS} = 0, I_F = I_S $	-	-0.94	-1.35	V
Reverse recovery time	t_{rr}	$V_R = -50\text{V}, I_F = I_S ,$ $di_F/dt = 100\text{A}/\mu\text{s}$	-	100	150	ns
Reverse recovery charge	Q_{rr}		-	419	628	nC

1 Power dissipation


$$P_{\text{tot}} = f(T_C)$$

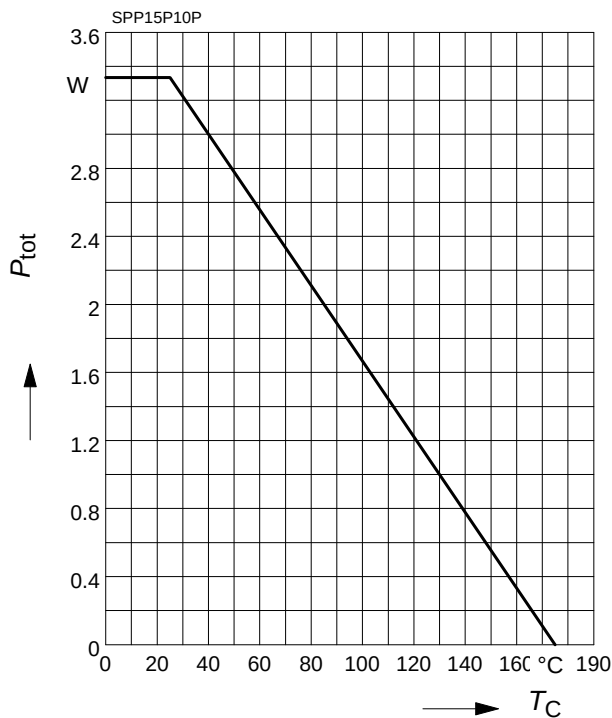

2 Drain current

$$I_D = f(T_C)$$


parameter: $|V_{GS}| \geq 10V$

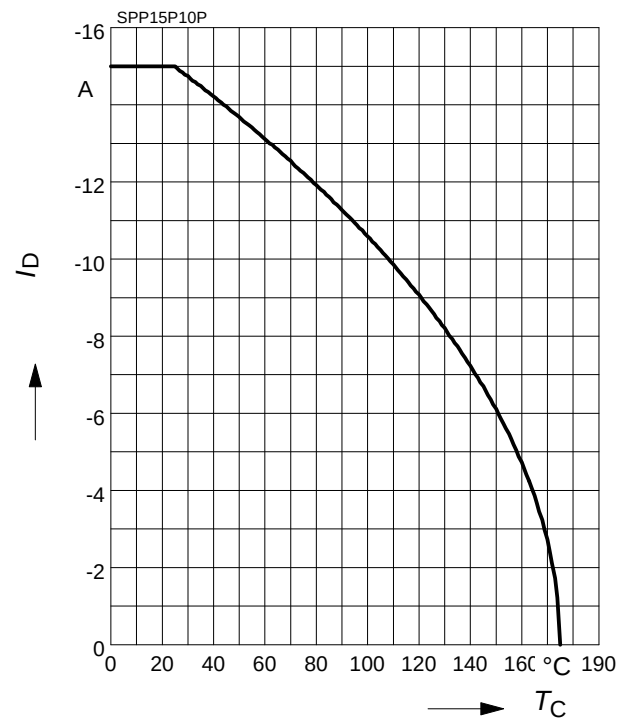

3 Safe operating area

$$I_D = f(V_{DS})$$


parameter: $D = 0$, $T_C = 25^\circ\text{C}$

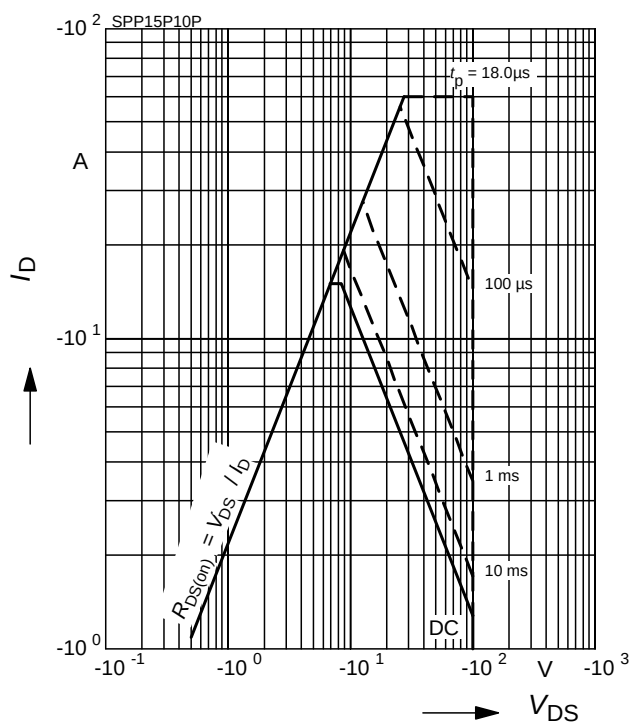

4 Max. transient thermal impedance

$$Z_{\text{thJC}} = f(t_p)$$


parameter: $D = t_p/T$

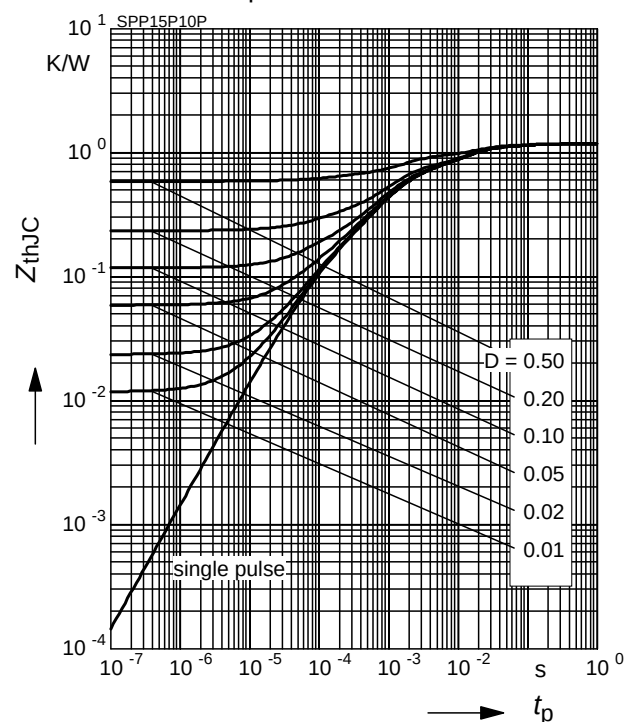

5 Typ. output characteristic

$$I_D = f(V_{DS})$$


parameter: $T_j = 25^\circ\text{C}$, $-V_{GS}$

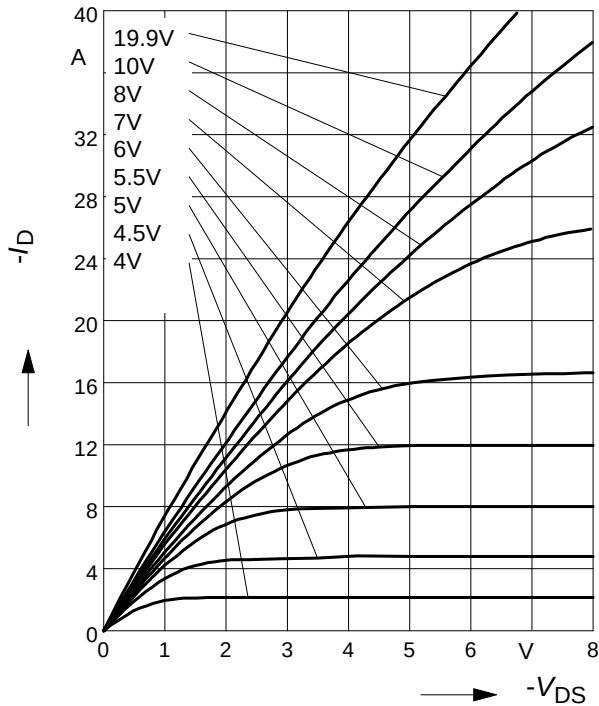

6 Typ. drain-source on resistance

$$R_{DS(on)} = f(I_D)$$


parameter: V_{GS} ; $T_j = 25^\circ\text{C}$, $-V_{GS}$

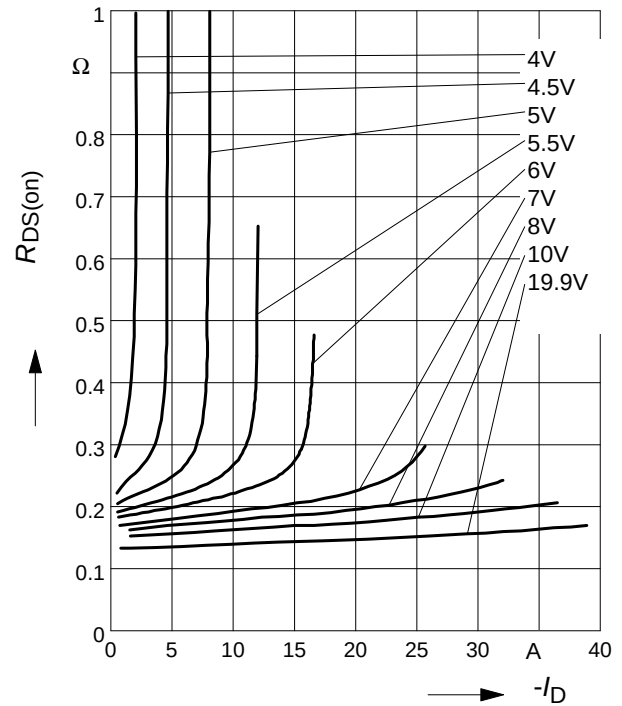

7 Typ. transfer characteristics

$$I_D = f(V_{GS}); |V_{DS}| \geq 2 \times |I_D| \times R_{DS(on)max}$$


parameter: $T_j = 25^\circ\text{C}$

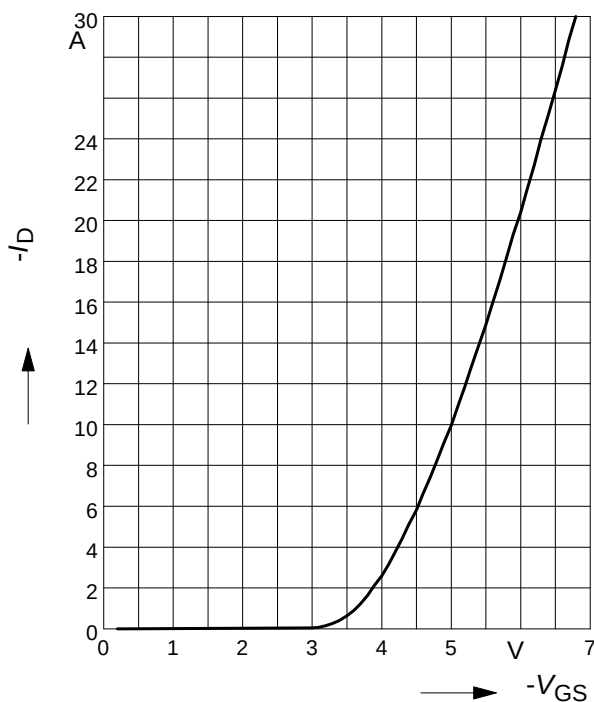

8 Typ. forward transconductance

$$g_{fs} = f(I_D)$$


parameter: $T_j = 25^\circ\text{C}$

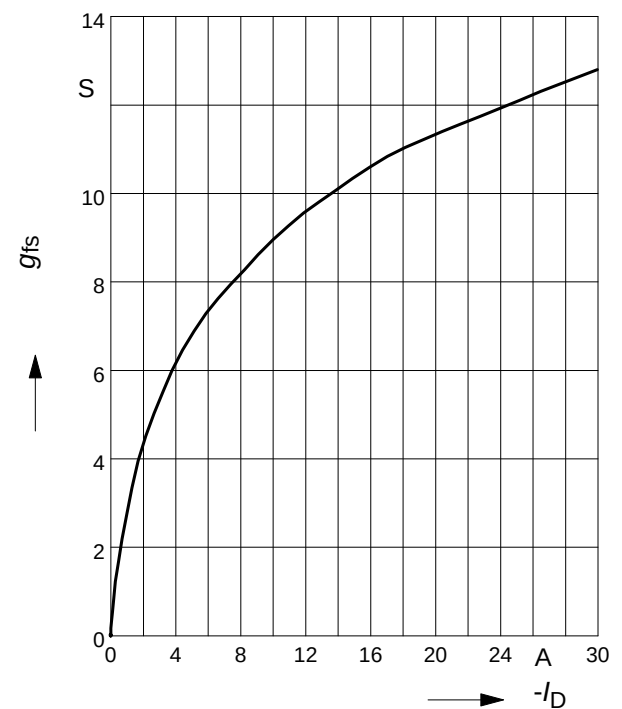

9 Drain-source on-state resistance

$$R_{DS(on)} = f(T_j)$$


parameter: $I_D = -10.6 \text{ A}$, $V_{GS} = -10 \text{ V}$

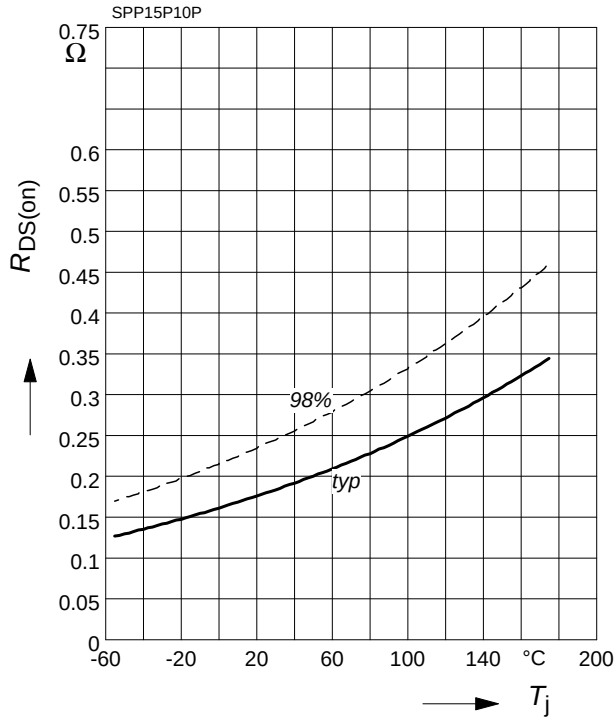

10 Typ. gate threshold voltage

$$V_{GS(th)} = f(T_j)$$


parameter: $V_{GS} = V_{DS}$

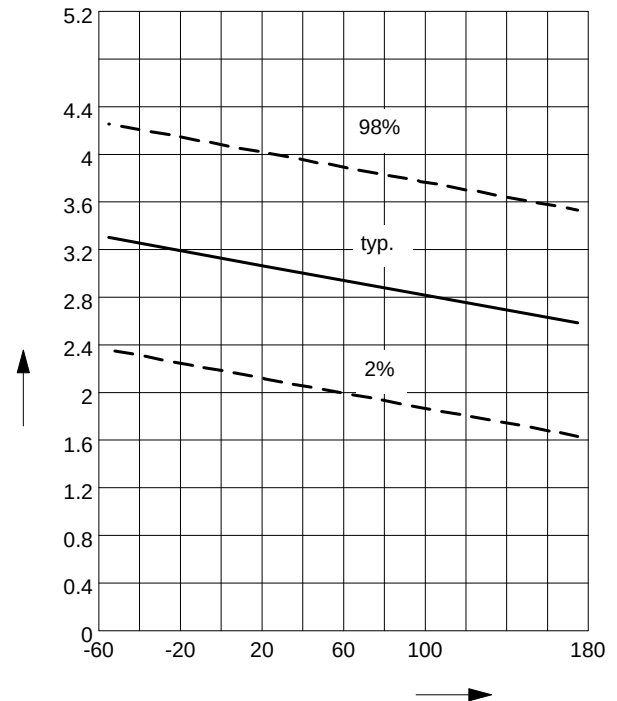

11 Typ. capacitances

$$C = f(V_{DS})$$


parameter: $V_{GS}=0$, $f=1 \text{ MHz}$, $T_j = 25 \text{ }^{\circ}\text{C}$

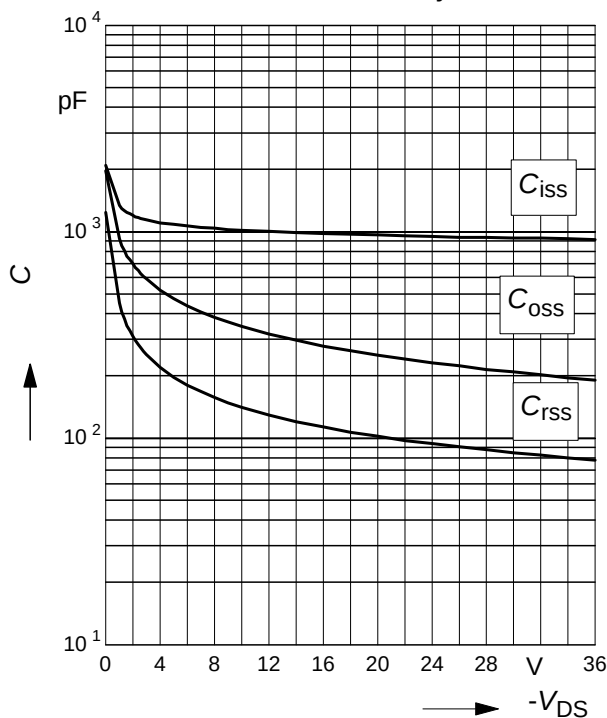


12 Forward character. of reverse diode



$$I_F = f(V_{SD})$$

parameter: T_j

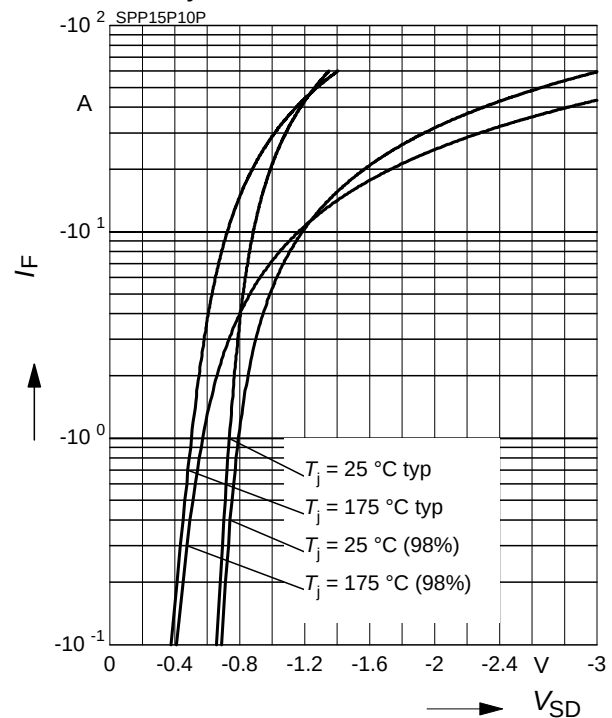

13 Typ. avalanche energy
 $E_{AS} = f(T_j)$; par.: $I_D = -15\text{ A}$,

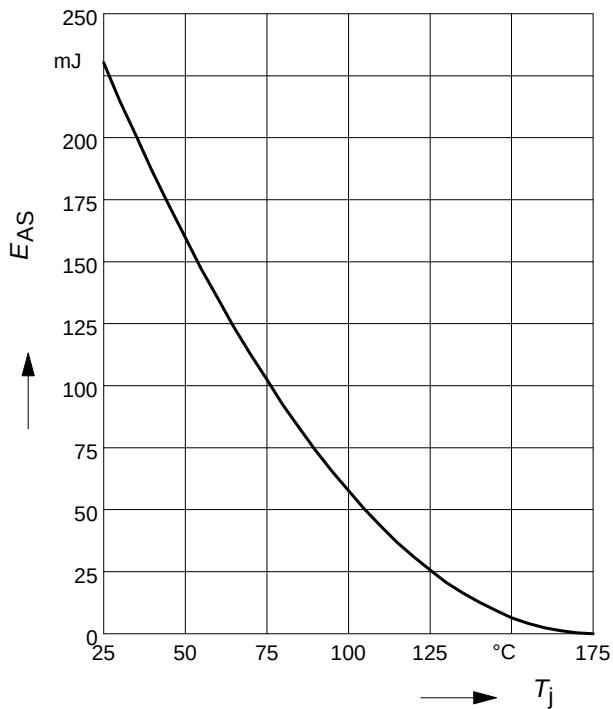 $V_{DD} = -25\text{ V}$, $R_{GS} = 25\ \Omega$

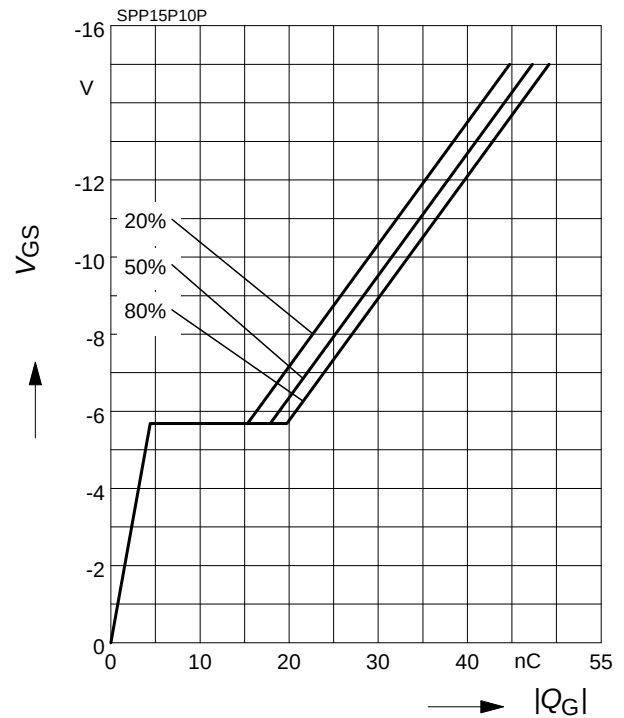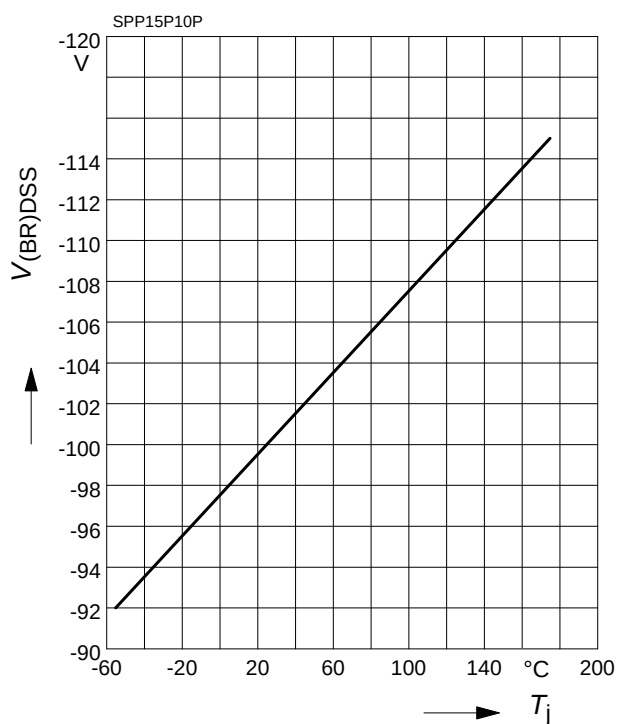14 Typ. gate charge
 $V_{GS} = f(Q_{Gate})$

parameter: $I_D = -15\text{ A}$ pulsed, $T_j = 25^\circ\text{C}$

15 Drain-source breakdown voltage
 $V_{(BR)DSS} = f(T_j)$


Published by
Infineon Technologies AG,
Bereichs Kommunikation
St.-Martin-Strasse 53,
D-81541 München
© Infineon Technologies AG 1999
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.