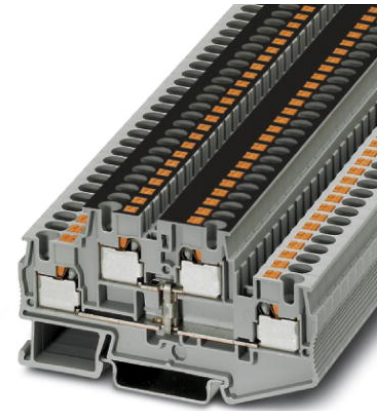



PITTB 4-PV

Order No.: 3211825

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3211825>

Double-level terminal block, Cross section: 0.2 mm² - 6 mm²,
AWG: 24 - 10, Connection type: Push-In connection, Width: 6.2 mm,
Color: gray, Mounting type: NS 35/7.5, NS 35/15

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  |
| sales group | A632 |
| Pack | 50 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 99 (CL1-2011) |

Product notes

WEEE/RoHS-compliant since:
12/17/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General**

| | |
|-----------------------|------|
| Number of levels | 2 |
| Number of connections | 4 |
| Color | gray |
| Insulating material | PA |

| | |
|---|---|
| Inflammability class acc. to UL 94 | V0 |
| Dimensions | |
| Width | 6.2 mm |
| Length | 83.5 mm |
| Height NS 35/7.5 | 47.5 mm |
| Height NS 35/15 | 55 mm |
| Technical data | |
| Rated surge voltage | 6 kV |
| Pollution degree | 3 |
| Surge voltage category | III |
| Insulating material group | I |
| Connection in acc. with standard | IEC 60947-7-1 |
| Nominal current I_N | 30 A (with 4 mm ² conductor cross section) |
| Nominal voltage U_N | 500 V |
| Connection data | |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 6 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 4 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 10 |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.25 mm ² |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 4 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve min. | 0.25 mm ² |
| Conductor cross section stranded, with ferrule with plastic sleeve max. | 4 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm ² |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1 mm ² |
| Connection method | Push-In connection |
| Stripping length | 10 mm |
| Internal cylindrical gage | A4 |

Certificates / Approvals

| | |
|-------------------|-------------------|
| Certification | CUL, GL, GOST, UL |
| Certification Ex: | IECEX, PTB |

Accessories

| Item | Designation | Description |
|-----------------|------------------------------|--|
| Assembly | | |
| 3030747 | ATP-STTB 4 | Partition plate, Length: 88.7 mm, Width: 2 mm, Height: 53 mm, Color: gray |
| 3022276 | CLIPFIX 35-5 | Snap-on end bracket, for NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 5 and ZBF 5, terminal strip marker KLM 2 and KLM, parking facility for FBS...5, FBS...6, KSS 5, KSS 6, width: 5,15 mm, color: gray |
| 3030462 | D-STTB 4 | End cover, Length: 83.5 mm, Width: 2.2 mm, Height: 47.5 mm, Color: gray |
| 3036738 | DP PS-6 | Spacer plate, Color: red |
| 0801704 | NS 35/ 7,5 AL UNPERF 2000MM | DIN rail, material: Aluminum, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 0801762 | NS 35/ 7,5 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1207640 | NS 35/ 7,5 PERF 755MM | NS 35 DIN rail, height 7.5 mm, length 755 mm |
| 1207653 | NS 35/ 7,5 PERF 955MM | NS35 DIN rail, height 7.5 mm, length 955 mm |
| 1207666 | NS 35/ 7,5 PERF 1155MM | NS 35 DIN rail, height 7.5 mm, length 1155 mm |
| 0801733 | NS 35/ 7,5 PERF 2000MM | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1208131 | NS 35/ 7,5 PERF/... | DIN rail, Width: 35 mm, Height: 7.5 mm, Color: silver |
| 0801681 | NS 35/ 7,5 UNPERF 2000MM | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1208115 | NS 35/ 7,5 UNPERF/... | DIN rail, Width: 35 mm, Height: 7.5 mm, Color: silver |
| 1208128 | NS 35/ 7,5 UNPERF/SO/... | DIN rail, Width: 35 mm, Height: 7.5 mm, Color: silver |
| 0801377 | NS 35/ 7,5 V2A UNPERF 2000MM | DIN rail, Width: 35 mm, Height: 7.5 mm, Length: 2000 mm, Color: silver |

| | | |
|---------|-----------------------------|--|
| 1206421 | NS 35/ 7,5 ZN PERF 2000MM | DIN rail, material: Galvanized, perforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1206434 | NS 35/ 7,5 ZN UNPERF 2000MM | DIN rail, material: Galvanized, unperforated, height 7.5 mm, width 35 mm, length: 2 m |
| 1201895 | NS 35/15 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m |
| 1201730 | NS 35/15 PERF 2000MM | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m |
| 1201714 | NS 35/15 UNPERF 2000MM | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m |
| 1208144 | NS 35/15 UNPERF/... | DIN rail, Width: 35 mm, Height: 15 mm, Color: silver |
| 1208157 | NS 35/15 UNPERF/SO/... | DIN rail, Width: 35 mm, Height: 15 mm, Color: silver |
| 1206586 | NS 35/15 ZN UNPERF 2000MM | DIN rail, material: Galvanized, unperforated, height 15 mm, width 35 mm, length: 2 m |

Bridges

| | | |
|---------|----------|---|
| 3030336 | FBS 2-6 | Plug-in bridge, Number of positions: 2, Color: red |
| 3030242 | FBS 3-6 | Plug-in bridge, Number of positions: 3, Color: red |
| 3030255 | FBS 4-6 | Plug-in bridge, Number of positions: 4, Color: red |
| 3030349 | FBS 5-6 | Plug-in bridge, Number of positions: 5, Color: red |
| 3030271 | FBS 10-6 | Plug-in bridge, Number of positions: 10, Color: red |
| 3030365 | FBS 20-6 | Plug-in bridge, Number of positions: 20, Color: red |
| 3032224 | FBS 50-6 | Plug-in bridge, Number of positions: 50, Color: red |

General

| | | |
|---------|--------|---|
| 3032185 | FBS-PV | Vertical potential bridge, to connect the upper and lower level |
|---------|--------|---|

Marking

| | | |
|---------|--------------|---|
| 0800967 | STP 5-2 | Double marker carrier, snaps onto the double-level spring-cage terminal block STTB 2.5 and STTB 4, labeled with ZB 5 or ZBF 5 |
| 0816498 | TMT 6 R | Markers for terminal blocks with 6 mm pitch, perforated, unprinted, for all terminal blocks with ZB and ZBF keyway, can be labelled using a thermo transfer printer, 1 roll = 1,000 strips, 16 labels/ strips, strip height: 6.4 mm |
| 0818140 | UC-TMF 6 | UniCard materials for labeling terminal blocks using a flat marker groove, 80-section, can be labeled with BLUEMARK and CMS-P1-PLOTTER, color: white |
| 0818140 | UC-TMF 6 | UniCard materials for labeling terminal blocks using a flat marker groove, 80-section, can be labeled with BLUEMARK and CMS-P1-PLOTTER, color: white |
| 0824646 | UC-TMF 6 CUS | UniCard sheets, for labeling terminal blocks with a flat zack marker sheet groove, can be printed as per customer requirements |

| | | |
|---------|------------------|--|
| 0828746 | UCT-TMF 6 | UniCard materials for thermal transfer printer, for labeling terminal blocks with a horizontal marker groove, 60-section, can be labeled with THERMOMARK CARD and BLUEMARK LED, color: white |
| 0829665 | UCT-TMF 6 CUS | Terminal block marking, can be labeled as per customer specifications |
| 0808710 | ZBF 6:UNBEDRUCKT | Zack strip, flat, unprinted: 10-section, for individual labeling with M-PEN or ZBF-T, sufficient for 100 terminal blocks, color: white |

Plug/Adapter


| | | |
|---------|------------|----------------------------------|
| 3002885 | ISH 4/0,5 | Insulating sleeve, Color: gray |
| 3002898 | ISH 4/1,0 | Insulating sleeve, Color: black |
| 0201731 | MPS-IH BK | Insulating sleeve, Color: black |
| 0201689 | MPS-IH BU | Insulating sleeve, Color: blue |
| 0201702 | MPS-IH GN | Insulating sleeve, Color: green |
| 0201728 | MPS-IH GY | Insulating sleeve, Color: gray |
| 0201676 | MPS-IH RD | Insulating sleeve, Color: red |
| 0201715 | MPS-IH VT | Insulating sleeve, Color: violet |
| 0201663 | MPS-IH WH | Insulating sleeve, Color: white |
| 0201692 | MPS-IH YE | Insulating sleeve, Color: yellow |
| 0201744 | MPS-MT | Test plugs |
| 3032871 | PAI-4-N GY | Test adapter, Color: gray |
| 3030996 | PS-6 | Test adapter, Color: red |

Tools

| | | |
|---------|---------------|---|
| 1204517 | SZF 1-0,6X3,5 | Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip |
|---------|---------------|---|

Diagrams/Drawings

Circuit diagram

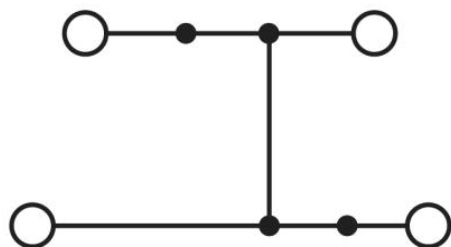

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2011 Phoenix Contact
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.