



## HLX Cable Marker

HLX Cable Markers are flat, non-adhesive labels that can be used to identify large cables and wire bundles in particularly aggressive environments. Presented as organised markers assembled onto a reel. Cable markers can be applied post cable termination using cable ties.

Manufactured using a specially developed radiation cross-linked polymer. Formulated to give **Low Fire Hazard** properties, which allow this product to be used in locations where fire may pose a risk to human life, and property. Typical installations include underground railways and mass transit.

This Cable marker is printed using thermal transfer technology.


### KEY FEATURES

- Zero Halogen
- Low toxic fumes
- Low Smoke
- Self-extinguishing
- Resistant to key industrial and rail fluids (defined by RW-2523)
- Excellent resistance to burning  
- typical LOI 39%

### APPLICATIONS

- Post termination cable identification
- Identification of large cables, wire bundles or pipework
- Installation friendly – easy to replace, ideal for retrofitting and repairs. Only Cable ties are needed.
- Particularly suitable for locations with a fire risk to human life or equipment
- Mass transit, Rail, Aerospace, Marine and Industrial

### PART DESCRIPTION

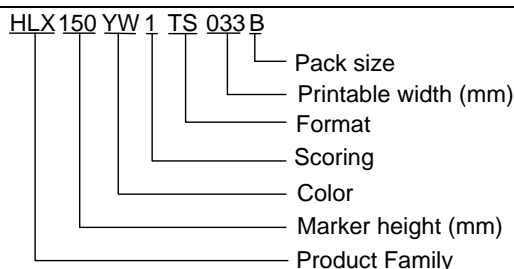

### TEMPERATURE RATING

Operating Temperature Range -40°C to 105°C (-40°F to 221°F)

### ENVIRONMENTAL

Does not contain any declarable or prohibited substances from the UNIFE Railway Industry Substances List

No Halogens, Sulphur, Nitrogen, Phosphorus and Cadmium sources above trace level

Does not promote mould growth (ASTM G21 – zero rating)

Further information and a downloadable declaration covering RoHS and REACH compliance can be found at the 'TE Product Compliance Support Centre':

<http://www.te.com/en/resources/product-compliance.html>

### SPECIFICATIONS / APPROVALS

#### TE Connectivity Standard

- RW-2523

#### Industrial


- London Underground 1-085, Fire Safety Performance of Materials 'Limited, dispersed usage'
- Registered for London Underground Product Acceptance and Registration, revision S1011 A2: <http://www.lu-apr.co.uk>
- EN45545-2 'Hazard Classification 3' Requirement Set R24
- BS6853 'Vehicle Category Ia'  
Interior minor use materials of mass 100g to 500g
- NF F 16-101 Railway rolling stock, fire behaviour, choice of materials: Classification A1

Where possible, TE have tested product as a finished item, including the print. Operational tests are followed by an assessment of mark adherence to validate fit form and function. Further details can be found in TE standard RW-2523.

## ORDERING INFORMATION

## HLX Cable Marker

### AVAILABLE FORMAT

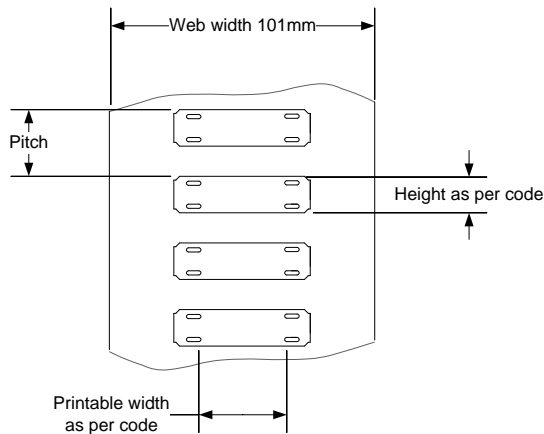

### OPTIONS

<b>Prescoring</b>	Not available on this item - always set to 1		
<b>Pack sizes</b>	Standard - always set to 'B'		
<b>Colors</b>	Standard	White	Yellow
	Code	WE	YW
	Non standard	Red	Blue
	Code	RD	BE
<b>Printable width on marker</b>	025	25mm (1 inch)	
	033	33mm (1.3 inches)	
	038	38mm (1.5 inches)	
	050	50mm (2 inches)	
	070	70mm (2.75 inches)	

The format reference for this product is TS. This product is for thermal transfer printing only.

Ordering information: Specify product name, marker height, color, scoring option (always 1), format (always TS), printable width and pack size (always B), e.g. HLX150YW1TS033B.

Part Description	Marker Dimensions (Width x Height)		Printable Area (Width x Height)		Pitch		Number of markers per page	Number of markers per pack
	mm	Inches	mm	Inches	mm	Inches		
HLX104<color>1TS025B	45 x 10.4	1.77 x 0.41	25 x 10.4	0.98 x 0.41	12.7	0.5	20	1000
HLX104<color>1TS033B	53 x 10.4	2.09 x 0.41	33 x 10.4	1.30 x 0.41	12.7	0.5	20	1000
HLX104<color>1TS038B	58 x 10.4	2.28 x 0.41	38 x 10.4	1.50 x 0.41	12.7	0.5	20	1000
HLX104<color>1TS050B	70 x 10.4	2.76 x 0.41	50 x 10.4	1.97 x 0.41	12.7	0.5	20	1000
HLX104<color>1TS070B	90 x 10.4	3.54 x 0.41	70 x 10.4	2.76 x 0.41	12.7	0.5	20	1000
HLX150<color>1TS025B	45 x 15.0	1.77 x 0.59	25 x 15.0	0.98 x 0.59	25.4	1.0	10	500
HLX150<color>1TS033B	53 x 15.0	2.09 x 0.59	33 x 15.0	1.30 x 0.59	25.4	1.0	10	500
HLX150<color>1TS038B	58 x 15.0	2.28 x 0.59	38 x 15.0	1.50 x 0.59	25.4	1.0	10	500
HLX150<color>1TS050B	70 x 15.0	2.76 x 0.59	50 x 15.0	1.97 x 0.59	25.4	1.0	10	500
HLX150<color>1TS070B	90 x 15.0	3.54 x 0.59	70 x 15.0	2.76 x 0.59	25.4	1.0	10	500
HLX203<color>1TS025B	45 x 20.3	1.77 x 0.80	25 x 20.3	0.98 x 0.80	25.4	1.0	10	500
HLX203<color>1TS033B	53 x 20.3	2.09 x 0.80	33 x 20.3	1.30 x 0.80	25.4	1.0	10	500
HLX203<color>1TS038B	58 x 20.3	2.28 x 0.80	38 x 20.3	1.50 x 0.80	25.4	1.0	10	500
HLX203<color>1TS050B	70 x 20.3	2.76 x 0.80	50 x 20.3	1.97 x 0.80	25.4	1.0	10	500
HLX203<color>1TS070B	90 x 20.3	3.54 x 0.80	70 x 20.3	2.76 x 0.80	25.4	1.0	10	500
HLX253<color>1TS025B	45 x 25.3	1.77 x 1.00	25 x 25.3	0.98 x 1.00	50.8	2.0	5	250
HLX253<color>1TS033B	53 x 25.3	2.09 x 1.00	33 x 25.3	1.30 x 1.00	50.8	2.0	5	250
HLX253<color>1TS038B	58 x 25.3	2.28 x 1.00	38 x 25.3	1.50 x 1.00	50.8	2.0	5	250
HLX253<color>1TS050B	70 x 25.3	2.76 x 1.00	50 x 25.3	1.97 x 1.00	50.8	2.0	5	250
HLX253<color>1TS070B	90 x 25.3	3.54 x 1.00	70 x 25.3	2.76 x 1.00	50.8	2.0	5	250

## HLX Cable Marker

### PRINTER INFORMATION

---

Print Quality and Print Performance can only be guaranteed when specific TE printer and ribbons are used.

The current list of printers and ribbons can be found in TE document 411-121005 '**Identification Printer Product Ribbon Matrix**'

This document can be found at the TE document centre:

<http://www.te.com/commerce/DocumentDelivery/DDEController>

### SOFTWARE

---

Cable Markers are fully supported by WINTOTAL and PrintEasy label printing software, available from the TE product store:

<http://www.te.com/en/general/label-printing-software.html>

Contact a TE representative for further information

*While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.*

\*Trademark. TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks. Other logos, product and/or company names may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.