



FEATURES

- UL 60950 recognized
- RoHS compliant
- Efficiency from 80%
- Power density 1.31W/cm³
- Wide temperature performance at full 2 Watt load, -40°C to 85°C
- UL 94V-0 package material
- No heatsink required
- Industry standard pinout
- 3kVDC isolation (1 minute)
- 5V, 12V, 15V & 24V inputs
- 5V, 9V, 12V, & 15V output
- Fully encapsulated with toroidal magnetics
- No electrolytic or tantalum capacitors

PRODUCT OVERVIEW

The NMK series of industrial temperature range DC/DC converters, available in industry standard SIP packaging offers a power upgrade path from the 1W NMV series. The un-regulated NMK series has superior output voltage set point accuracy in conjunction with excellent load regulation for this converter type.

Unbalanced loading capabilities on dual output variants, all of the rated output power may be drawn from a single output³.



For full details go to
www.murata-ps.com/rohs

NMK Series

3kVDC Isolated 2W Single & Dual Output DC/DC Converters

SELECTION GUIDE

| Order Code ³ | Nominal Input Voltage | | Output Voltage | | Output Current | | Input Current at Rated Load | | Load Regulation (Typ) | | Load Regulation (Max) | | Ripple & Noise (Typ) ¹ | | Ripple & Noise (Max) ¹ | | Efficiency (Min.) | | Efficiency (Typ.) | | Isolation Capacitance | | MTTF ² | |
|-------------------------|-----------------------|-----|----------------|-----|----------------|-----|-----------------------------|----|-----------------------|----|-----------------------|------|-----------------------------------|--|-----------------------------------|--|-------------------|--|-------------------|--|-----------------------|--|-------------------|--|
| | V | V | mA | mA | % | % | mVp-p | % | % | % | pF | kHrs | | | | | | | | | | | | |
| NMK0505SAC | 5 | 5 | 400 | 470 | 5.7 | 7.3 | 18 | 20 | 80 | 83 | 28 | 3998 | | | | | | | | | | | | |
| NMK0509SAC | 5 | 9 | 222 | 455 | 4.2 | 5.9 | 20 | 25 | 83 | 86 | 36 | 3718 | | | | | | | | | | | | |
| NMK0512SAC | 5 | 12 | 167 | 450 | 3.8 | 5.1 | 18 | 20 | 83 | 87 | 36 | 3328 | | | | | | | | | | | | |
| NMK0515SAC | 5 | 15 | 133 | 450 | 3.4 | 4.5 | 17 | 20 | 84 | 87 | 34 | 2855 | | | | | | | | | | | | |
| NMK1205SAC | 12 | 5 | 400 | 200 | 4.2 | 4.9 | 25 | 30 | 80 | 83 | 33 | 3532 | | | | | | | | | | | | |
| NMK1209SAC | 12 | 9 | 222 | 190 | 2.6 | 3.1 | 19 | 20 | 83 | 87 | 53 | 2417 | | | | | | | | | | | | |
| NMK1212SAC | 12 | 12 | 167 | 190 | 2.4 | 2.9 | 17 | 23 | 85 | 88 | 62 | 2246 | | | | | | | | | | | | |
| NMK1215SAC | 12 | 15 | 133 | 185 | 2.0 | 2.4 | 14 | 16 | 84 | 89 | 56 | 2020 | | | | | | | | | | | | |
| NMK1505SAC | 15 | 5 | 400 | 158 | 4.3 | 5.5 | 34 | 55 | 81 | 84 | 37 | TBD | | | | | | | | | | | | |
| NMK1509SAC | 15 | 9 | 222 | 153 | 3 | 4 | 21 | 40 | 83 | 86 | 51 | TBD | | | | | | | | | | | | |
| NMK1512SAC | 15 | 12 | 167 | 150 | 2.5 | 3.5 | 20 | 40 | 84 | 87 | 63 | TBD | | | | | | | | | | | | |
| NMK1515SAC | 15 | 15 | 133 | 149 | 2.4 | 3.5 | 20 | 40 | 85 | 88 | 72 | TBD | | | | | | | | | | | | |
| NMK2405SAC | 24 | 5 | 400 | 99 | 4.2 | 5.5 | 42 | 70 | 80 | 84 | 41 | TBD | | | | | | | | | | | | |
| NMK2409SAC | 24 | 9 | 222 | 95 | 2.7 | 3.5 | 30 | 55 | 83 | 87 | 59 | TBD | | | | | | | | | | | | |
| NMK2412SAC | 24 | 12 | 167 | 94 | 2.1 | 3 | 29 | 55 | 84 | 88 | 77 | TBD | | | | | | | | | | | | |
| NMK2415SAC | 24 | 15 | 133 | 93 | 2.2 | 3 | 34 | 70 | 85 | 88 | 85 | TBD | | | | | | | | | | | | |
| NMK0505SC | 5 | ±5 | ±200 | 470 | 5 | 6.2 | 24 | 40 | 81 | 83 | 28 | 2324 | | | | | | | | | | | | |
| NMK0509SC | 5 | ±9 | ±111 | 455 | 3.9 | 5.3 | 18 | 30 | 83 | 86 | 33 | 2158 | | | | | | | | | | | | |
| NMK0512SC | 5 | ±12 | ±83 | 450 | 3.7 | 4.8 | 14 | 20 | 84 | 87 | 35 | 1931 | | | | | | | | | | | | |
| NMK0515SC | 5 | ±15 | ±67 | 450 | 3.5 | 5.2 | 12 | 20 | 84 | 87 | 31 | 1655 | | | | | | | | | | | | |
| NMK1205SC | 12 | ±5 | ±200 | 200 | 3.4 | 3.9 | 21 | 30 | 80 | 84 | 35 | 1952 | | | | | | | | | | | | |
| NMK1209SC | 12 | ±9 | ±111 | 190 | 2.4 | 2.8 | 16 | 20 | 83 | 87 | 50 | 2021 | | | | | | | | | | | | |
| NMK1212SC | 12 | ±12 | ±83 | 190 | 2.2 | 2.7 | 13 | 20 | 84 | 87 | 53 | 1821 | | | | | | | | | | | | |
| NMK1215SC | 12 | ±15 | ±67 | 190 | 1.9 | 2.4 | 13 | 20 | 83 | 87 | 57 | 1574 | | | | | | | | | | | | |
| NMK1505SC | 15 | ±5 | ±200 | 156 | 3.7 | 5 | 27 | 50 | 81 | 84 | 43 | TBD | | | | | | | | | | | | |
| NMK1509SC | 15 | ±9 | ±111 | 153 | 2.4 | 3.5 | 19 | 35 | 82 | 86 | 47 | TBD | | | | | | | | | | | | |
| NMK1512SC | 15 | ±12 | ±83 | 151 | 2.2 | 3 | 18 | 35 | 84 | 88 | 65 | TBD | | | | | | | | | | | | |
| NMK1515SC | 15 | ±15 | ±67 | 150 | 2.0 | 3 | 14 | 35 | 85 | 88 | 74 | TBD | | | | | | | | | | | | |
| NMK2405SC | 24 | ±5 | ±200 | 96 | 3.4 | 5 | 30 | 50 | 81 | 84 | 43 | TBD | | | | | | | | | | | | |
| NMK2409SC | 24 | ±9 | ±111 | 94 | 2.3 | 3.5 | 26 | 45 | 84 | 87 | 65 | TBD | | | | | | | | | | | | |
| NMK2412SC | 24 | ±12 | ±83 | 93 | 1.9 | 3 | 24 | 45 | 85 | 89 | 82 | TBD | | | | | | | | | | | | |
| NMK2415SC | 24 | ±15 | ±67 | 93 | 1.7 | 3 | 17 | 35 | 85 | 89 | 86 | TBD | | | | | | | | | | | | |

INPUT CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|--------------------------|--|------|------|------|--------|
| Voltage range | Continuous operation, 5V input types | 4.5 | 5 | 5.5 | V |
| | Continuous operation, 12V input types | 10.8 | 12 | 13.2 | |
| | Continuous operation, 15V input types | 13.5 | 15 | 16.5 | |
| | Continuous operation, 24V input types | 21.6 | 24 | 26.4 | |
| Reflected ripple current | NMK2405SAC, NMK2409SAC, NMK2405SC, NMK2409SC | | 14 | 25 | mA p-p |
| | All other variants | | 7.5 | 15 | |

1. See Ripple & Noise characterisation method.

2. Calculated using MIL-HDBK-217F FN2 with nominal input voltage at full load.

3. See application notes on page 3.

All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.

OUTPUT CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|----------------------------|---|------|------|------|-------|
| Rated Power | T _A =-40°C to 85°C | | | 2 | W |
| Voltage Set Point Accuracy | See tolerance envelope | | | | |
| Line regulation | High V _{IN} to low V _{IN} | | 1.05 | 1.2 | %/% |

ABSOLUTE MAXIMUM RATINGS

| | |
|---|-------|
| Lead temperature 1.5mm from case for 10 seconds | 260°C |
| Input voltage V _{IN} , NMK05 types | 7V |
| Input voltage V _{IN} , NMK12 types | 15V |
| Input voltage V _{IN} , NMK15 types | 18V |
| Input voltage V _{IN} , NMK24 types | 28V |

ISOLATION CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|------------------------|---------------------------|------|------|------|-------|
| Isolation test voltage | Flash tested for 1 minute | 3000 | | | VDC |
| Resistance | Viso= 1000VDC | 10 | | | GΩ |


GENERAL CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|---------------------|------------|------|------|------|-------|
| Switching frequency | | | 60 | | kHz |



TEMPERATURE CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|--------------------------------|--|------|------|------|-------|
| Specification | All output types | -40 | | 85 | |
| Storage | | -50 | | 125 | |
| Case Temperature above ambient | 5V output types & NMK1509SAC (Except NMK1505S(A)C & NMK2405S(A)) | | | 28 | °C |
| | NMK1505S(A)C & NMK2405S(A)C | | | 32 | |
| Cooling | All other output types | | | 25 | |
| | Free air convection | | | | |

TEMPERATURE DERATING GRAPH

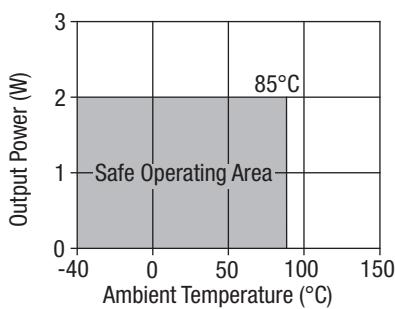

TOLERANCE ENVELOPE

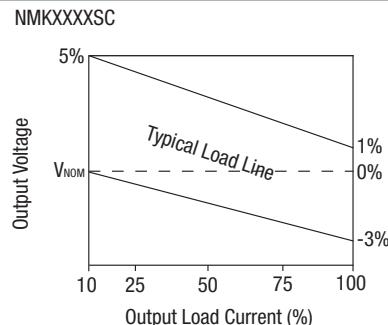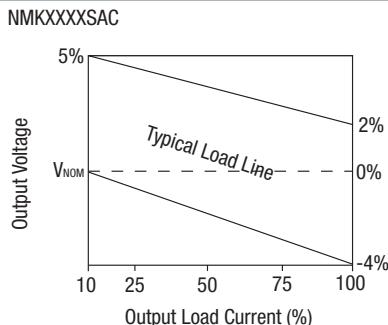

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMK series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 3kVDC for 1 minute.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The NMK series has been recognized by Underwriters Laboratory for functional insulation. Both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMK series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

SAFETY APPROVAL

The NMK series has been recognised by Underwriters Laboratory (UL) to UL 60950 for functional insulation in a maximum ambient temperature of 85°C and/or case temperature limit of 130°C. Case temperature measured on the face opposite the pins. File number E179522 applies.

The NMK Series of converters are not internally fused so to meet the requirements of UL 60950 an anti-surge input line fuse should always be used as below:

NMK05xxSC/SAC: 2A

NMK12xxSC/SAC: 0.75A

NMK15xxSC/SAC: 0.75A

NMK24xxSC/SAC: 0.375A

RoHS COMPLIANT INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.
For further information, please visit www.murata-ps.com/rohs

APPLICATION NOTES

Minimum Load

The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

Unbalanced Load

The NMK series offers unbalanced loading capabilities with up to the full 2W available from a single output. However, when operated in this mode there may be a slight performance decrease in efficiency and load regulation.

APPLICATION NOTES (continued)


Ripple & Noise Characterisation Method

All measurement to be taken with the following components connected to the UUT as detailed below.

50 Ohm coax cable, solder connections one end, BNC plug at the other end.


| | |
|-------|--|
| C1 | 1μF X7R multilayer ceramic capacitor rated at minimum 3 x the output voltage of the UUT |
| C2 | 10μF tantalum capacitor rated at minimum 1.5 x the output voltage of the UUT with ESR of less than 100 milliohms at 100 kHz e.g. AVX TPS |
| C3 | 100nF multilayer ceramic capacitor, general purpose |
| R1 | 450 Ohm resistor, carbon film, ±1% |
| R2 | 50 Ohm BNC termination |
| T1 | 3T of the coax cable through a ferrite toroid eg Ferroxube TN32/19/13-3E25 |
| RLOAD | Resistive load at the UUT maximum rating. Connections via twisted wires. |

Differential Mode Noise Test Schematic

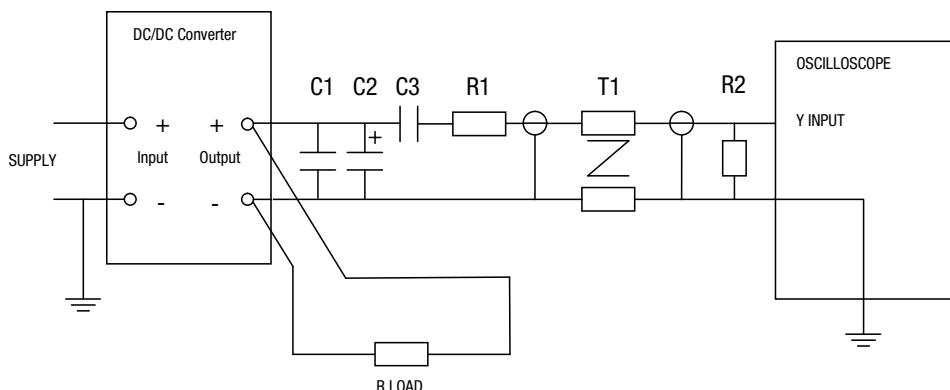


EFFICIENCY VS LOAD

NMK05XXSAC

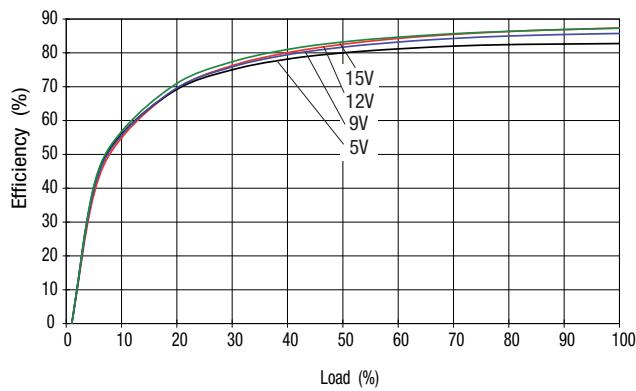


NMK12XXSAC

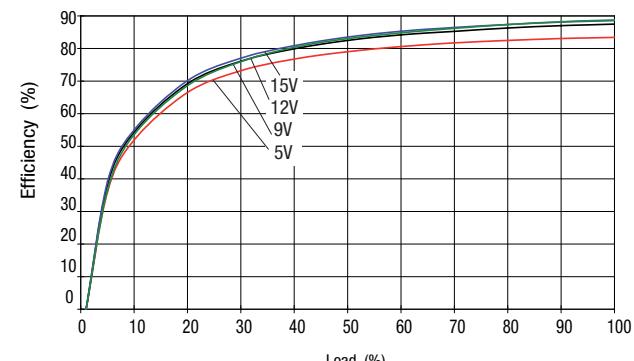


EFFICIENCY VS LOAD (continued)


NMK15XXSAC

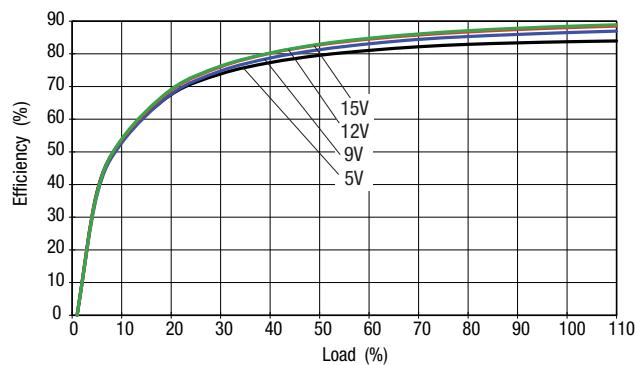


NMK24XXSAC

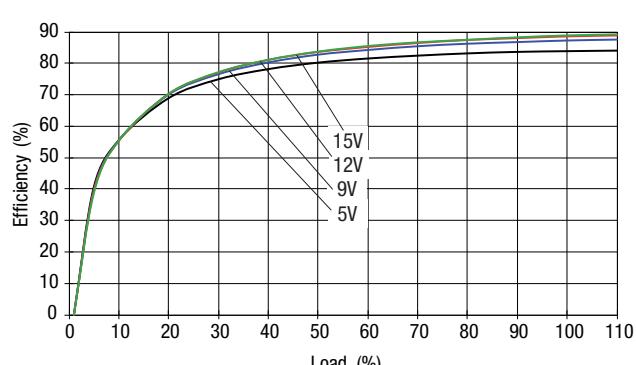


NMK05XXSC

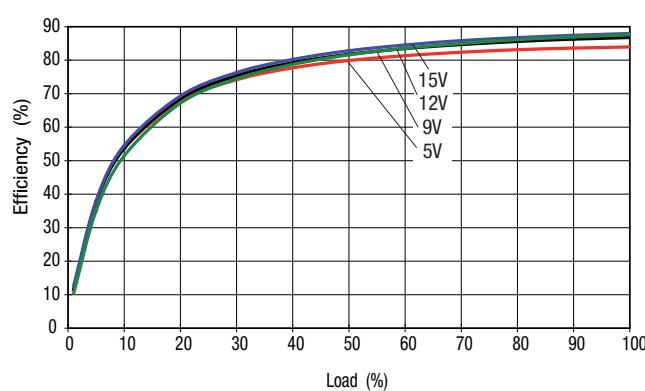


NMK12XXSC

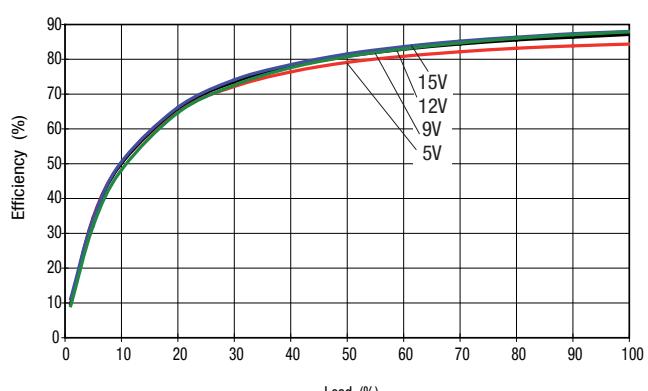

NMK15XXSC

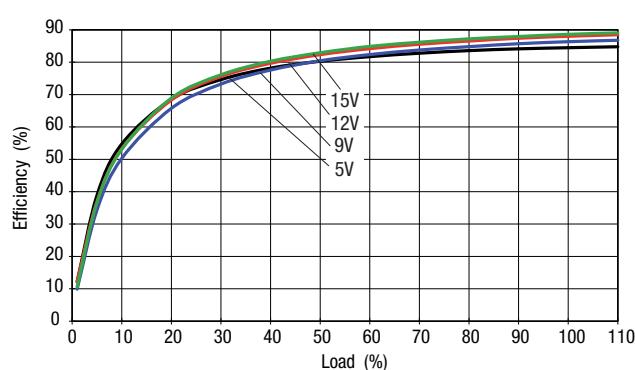


NMK24XXSC

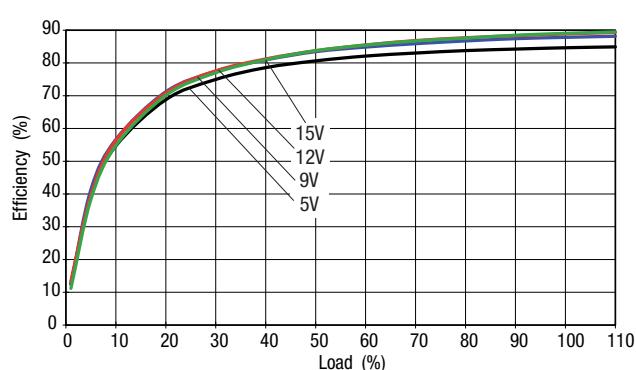

PACKAGE SPECIFICATIONS


MECHANICAL DIMENSIONS

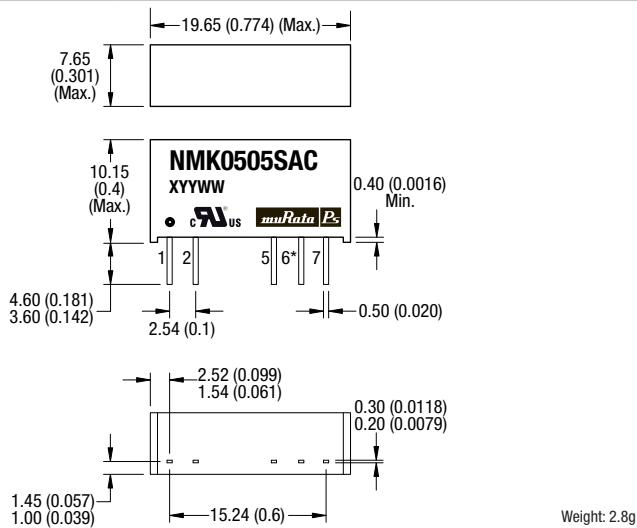

* Pin not fitted on single output variants.


All dimensions in mm ± 0.25 (inches ± 0.01). All pins on a 2.54 (0.1) pitch and within ± 0.25 (0.01) of true position.

RECOMMENDED FOOTPRINT DETAILS

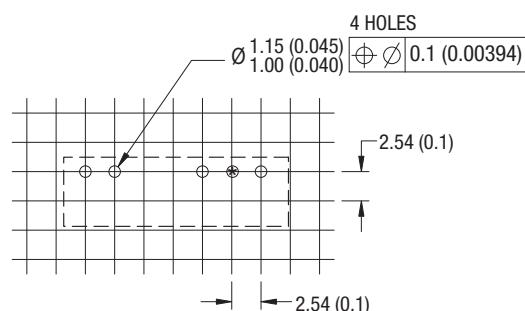

* Hole not required for single output variants.
Unless otherwise stated all dimensions in mm (inches) ± 0.5 mm.

TUBE OUTLINE DIMENSIONS

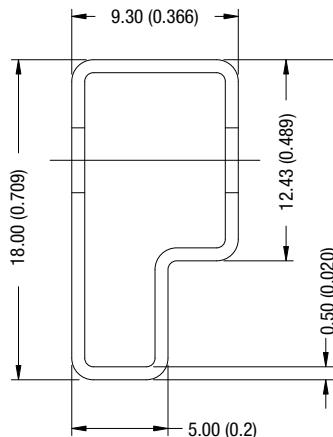

Unless otherwise stated all dimensions in mm (inches) ± 0.5 mm.
Tube length: 520mm ± 2 mm (20.47).

Tube Quantity : 25

PIN CONNECTIONS

| Single output variants | |
|------------------------|-------------------|
| Pin | Function |
| 1 | +V _{IN} |
| 2 | -V _{IN} |
| 5 | -V _{OUT} |
| 7 | +V _{OUT} |

| Dual output variants | |
|----------------------|-------------------|
| Pin | Function |
| 1 | +V _{IN} |
| 2 | -V _{IN} |
| 5 | -V _{OUT} |
| 6 | OV |
| 7 | +V _{OUT} |



This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#). Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2012 Murata Power Solutions, Inc.

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
ISO 9001 and 14001 REGISTERED



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.