



■ Features

- **Global certificates**
- Universal AC input / Full range
- 2 pole EURO plug, Class II power unit
- No load power consumption < 0.075W
- **Energy efficiency Level VI**
- Comply with EU ErP and CoC Version 5
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Pass LPS
- -30~+70°C wide range working temperature
- LED indicator for power on
- **Various DC plug quick adapter accessory available**
(Plug kit sold sperately, please refer to : https://www.meanwell.com/upload/pdf/DC_plug.pdf)
- 3 years warranty

■ Applications

- Consumer electronic devices
- Telecommunication devices
- Office facilities
- Industrial equipments

■ Description

GST25E is a highly reliable, 25W wall-mounted style single-output green adaptor series. This product is a class II power unit (no FG), equipped with a 2-Pin standard European AC power plug, adopting the input range from 85VAC to 264VAC. The entire series supplies different models with output voltages ranging between 5VDC and 48VDC that can satisfy the demands for various types of consumer electronic devices. With the efficiency up to 89% and the extremely low no-load power consumption below 0.075W, GST25E is compliant with EU ErP, and Code of Conduct(CoC) Version 5 . The supreme feature allows the adaptor to save the energy when it is either under the operating mode or the standby mode. The entire series utilizes the 94V-0 flame retardant plastic case, providing the double insulation that effectively prevents electrical shock.GST25E is certified for the international safety regulations.

■ Model Encoding

GST 25 E 05 -P1J







SPECIFICATION

| ORDER NO. | GST25E05-P1J | GST25E07-P1J | GST25E09-P1J | GST25E12-P1J | GST25E15-P1J | GST25E18-P1J | GST25E24-P1J | GST25E28-P1J | GST25E48-P1J | | |
|----------------------------------|--|---|---------------------------------|----------------|--------------|--------------|--|---------------|--|-----------|--|
| OUTPUT | SAFETY MODEL NO. | GST25E05 | GST25E07 | GST25E09 | GST25E12 | GST25E15 | GST25E18 | GST25E24 | GST25E28 | GST25E48 | |
| | DC VOLTAGE Note.2 | 5V | 7.5V | 9V | 12V | 15V | 18V | 24V | 28V | 48V | |
| | RATED CURRENT | 4.0A | 2.93A | 2.55A | 2.08A | 1.66A | 1.38A | 1.04A | 0.89A | 0.52A | |
| | CURRENT RANGE | 0 ~ 4.0A | 0 ~ 2.93A | 0 ~ 2.55A | 0 ~ 2.08A | 0 ~ 1.66A | 0 ~ 1.38A | 0 ~ 1.04A | 0 ~ 0.89A | 0 ~ 0.52A | |
| | RATED POWER (max.) | 20W | 22W | 23W | 25W | 25W | 25W | 25W | 25W | 25W | |
| | RIPPLE & NOISE (max.) Note.3 | 80mVp-p | 80mVp-p | 80mVp-p | 80mVp-p | 100mVp-p | 100mVp-p | 150mVp-p | 150mVp-p | 150mVp-p | |
| | VOLTAGE TOLERANCE Note.4 | ±5.0% | ±5.0% | ±5.0% | ±3.0% | ±3.0% | ±3.0% | ±2.0% | ±2.0% | ±2.0% | |
| | LINE REGULATION Note.5 | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | |
| | LOAD REGULATION Note.6 | ±5.0% | ±5.0% | ±5.0% | ±3.0% | ±3.0% | ±3.0% | ±2.0% | ±2.0% | ±2.0% | |
| SETUP, RISE, HOLD UP TIME | 1000ms, 30ms, 50ms/230VAC 1500ms, 30ms, 15ms/115VAC at full load | | | | | | | | | | |
| INPUT | VOLTAGE RANGE Note.7 | 85 ~ 264VAC | | | | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | | | |
| | EFFICIENCY (Typ.) | 81.5% | 84.5% | 85% | 86.5% | 87% | 87% | 88% | 88% | 89% | |
| | AC CURRENT | 0.6A / 115VAC | | 0.35A / 230VAC | | | | | | | |
| | INRUSH CURRENT (max.) | Cold start 35A / 115VAC | | 65A / 230VAC | | | | | | | |
| | LEAKAGE CURRENT(max.) | 0.25mA / 240VAC | | | | | | | | | |
| PROTECTION | OVERLOAD | 110 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | | | | | | |
| | OVER VOLTAGE | 110 ~ 140% rated output voltage Protection type : Clamp by zener diode | | | | | | | | | |
| ENVIRONMENT | WORKING TEMP. | -30 ~ +70°C (Refer to "Derating Curve") | | | | | | | | | |
| | WORKING HUMIDITY | 20% ~ 90% RH non-condensing | | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH non-condensing | | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03% / °C (0 ~ 50°C) | | | | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | | | | | | |
| SAFETY & EMC (Note. 9) | SAFETY STANDARDS Note. 8 | TUV EN62368-1, EAC TP TC 004 approved; SIRIM MS IEC60950-1 (optional) approved | | | | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:4242VDC | | | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH | | | | | | | | | |
| | EMC EMISSION | Parameter | Standard | | | | | | Test Level / Note | | |
| | | Conducted emission | EN55032(CISPR32), EAC TP TC 020 | | | | | | Class B | | |
| | | Radiated emission | EN55032(CISPR32), EAC TP TC 020 | | | | | | Class B | | |
| | | Harmonic current | EN61000-3-2 | | | | | | Class A | | |
| | Voltage flicker | EN61000-3-3 | | | | | | ----- | | | |
| | EMC IMMUNITY | Parameter | Standard | | | | | | Test Level / Note | | |
| | | ESD | EN61000-4-2 | | | | | | Level 3, 8KV air; Level 2, 4KV contact | | |
| | | RF field susceptibility | EN61000-4-3 | | | | | | Level 2, 3V/m | | |
| | | EFT bursts | EN61000-4-4 | | | | | | Level 2, 1KV | | |
| | | Surge susceptibility | EN61000-4-5 | | | | | | Level 4, 2KV/Line-Line | | |
| Conducted susceptibility | | EN61000-4-6 | | | | | | Level 2, 3V | | | |
| Magnetic field immunity | | EN61000-4-8 | | | | | | Level 2, 3A/m | | | |
| Voltage dips , interruption | EN61000-4-11 | | | | | | >95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods | | | | |
| OTHERS | MTBF | 500Khrs min. MIL-HDBK-217F(25°C) | | | | | | | | | |
| | DIMENSION | 79*54*33mm (L*W*H) | | | | | | | | | |
| | PACKING | 202.5g; 60pcs/13.2Kg/1.22CUFT | | | | | | | | | |
| CONNECTOR | PLUG | See page 4~5 ; Other type available by customer requested | | | | | | | | | |
| | CABLE | See page 4~5 ; Other type available by customer requested | | | | | | | | | |
| NOTE | <p>1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient.</p> <p>2.DC voltage: The output voltage set at point measure by plug terminal & 50% load.</p> <p>3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1µf & 47µf capacitor.</p> <p>4.Tolerance: includes set up tolerance, line regulation, load regulation.</p> <p>5.Line regulation is measured from low line to high line at rated load.</p> <p>6.Load regulation is measured from 10% to 100% rated load.</p> <p>7.Derating may be needed under low input voltage. Please check the derating curve for more details.</p> <p>8.The demand for Malaysia safety is processed with the order no. GST25E □ -SIRIM by request. Please contact MEAN WELL for details.</p> <p>9.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p> | | | | | | | | | | |

■ Derating Curve



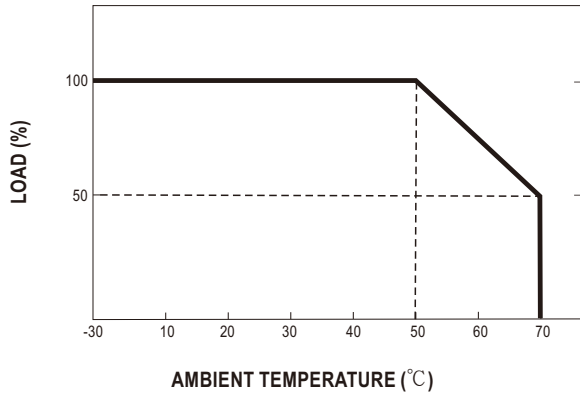


■ Static Characteristics

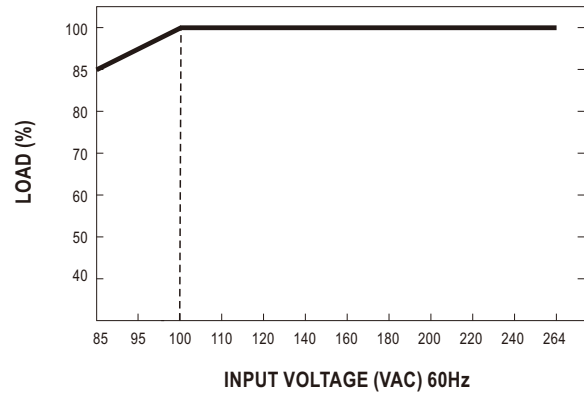

■ Mechanical Specification

Unit:mm

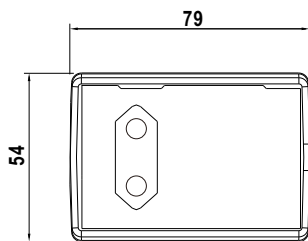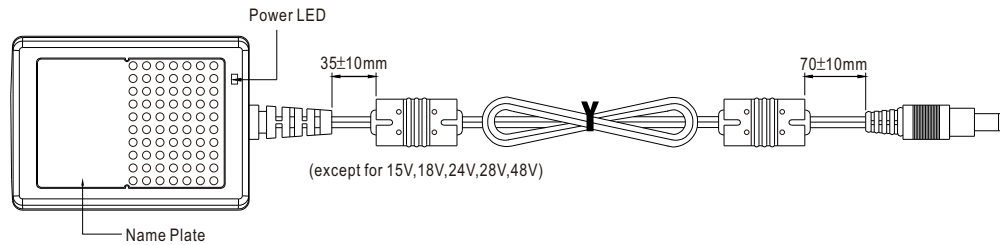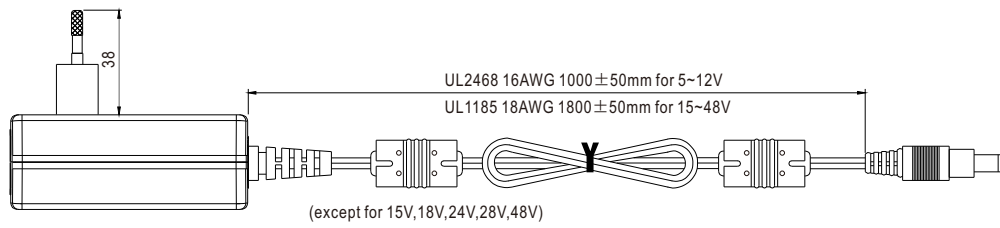

■ DC output plug

◎ Standard plug: P1J

| P1J | Pin Assignment |
|-----|------------------|
| | |
| | Outside Inside |

◎ DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
- (2) Quick adapter accessory (sold separately without MOQ)




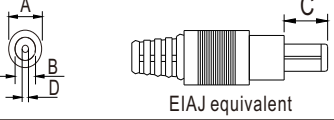









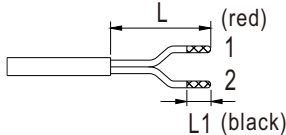
Please refer to below table and online selection guide : https://www.meanwell.com/upload/pdf/DC_plug.pdf

Example quick adapter accessory:



◎ Optional DC plug: (Available in customized cable or quick adapter)

| Tuning Fork Style | Type No. | A | B | C | Quick Adapter Accessory | |
|-------------------|---------------------|------------|------|------|--|-------|
| | | OD | ID | L | | |
| | P1I (Straight) | 5.5 | 2.1 | 9.5 | Available (Current rating: 7.5A max.) | |
| | P1L (Straight) | 5.5 | 2.5 | 9.5 | | |
| | P1M (Straight) | 5.5 | 2.5 | 11.0 | | |
| | P1IR (Right-angled) | 5.5 | 2.1 | 9.5 | | |
| | P1JR (Right-angled) | 5.5 | 2.1 | 11.0 | | |
| | P1LR (Right-angled) | 5.5 | 2.5 | 9.5 | | |
| | P2I (Straight) | 5.5 | 2.1 | 9.5 | None | |
| | P2J (Straight) | 5.5 | 2.1 | 11.0 | | |
| | P2L (Straight) | 5.5 | 2.5 | 9.5 | | |
| | P2M (Straight) | 5.5 | 2.5 | 11.0 | | |
| | P2IR (Right-angled) | 5.5 | 2.1 | 9.5 | | |
| | P2JR (Right-angled) | 5.5 | 2.1 | 11.0 | | |
| | P2LR (Right-angled) | 5.5 | 2.5 | 9.5 | | |
| | P2MR (Right-angled) | 5.5 | 2.5 | 11.0 | | |
| | Type No. | A | B | C | None | |
| | | OD | ID | L | | |
| | | P2S(S761K) | 5.53 | 2.03 | | 12.06 |
| | | P2K(761K) | 5.53 | 2.54 | | 12.06 |
| | | P2C(S760K) | 5.53 | 2.03 | | 9.52 |
| P2D(760K) | 5.53 | 2.54 | 9.52 | | | |

| Min. Pin Style | Type No. | A | B | C | Quick Adapter Accessory | |
|--|-------------|----------------|--------|--|--|--|
| | | OD | ID | L | | |
|   <p>EIAJ equivalent</p> | P3A | 2.35 | 0.7 | 11.0 | Available (Current rating: 5A max.) | |
| | P3B | 4.0 | 1.7 | 11.0 | | |
| | P3C | 4.75 | 1.7 | 11.0 | | |
| Center Pin Style | Type No. | A | B | C | D | Available (Current rating: 7.5A max.) |
|   <p>EIAJ equivalent</p> | P4A | 5.5 | 3.4 | 11.0 | 1.0 | |
| | P4B | 6.5 | 4.4 | 11.0 | 1.4 | |
| | P4C | 7.4 | 5.1 | 11.0 | 0.6 | |
| Min. DIN 3 Pin with Lock (male) | Type No. | Pin Assignment | | Available (Current rating: 7.5A max.) | | |
|   <p>KYCON KPPX-3P equivalent</p> | R6B | PIN No. | Output | | | |
| | | 1 | +Vo | | | |
| | | 2 | -Vo | | | |
| 3 | +Vo | | | | | |
| Min. DIN 4 Pin with Lock (male) | Type No. | Pin Assignment | | Available (Current rating: 7.5A max.) | | |
|   <p>KYCON KPPX-4P equivalent</p> | R7B | PIN No. | Output | | | |
| | | 1 | +Vo | | | |
| | | 2 | -Vo | | | |
| | | 3 | -Vo | | | |
| 4 | +Vo | | | | | |
| Min. DIN 4 Pin with Lock (female) | Type No. | Pin Assignment | | None | | |
|   <p>KYCON KPJX-CM-4S equivalent</p> | R7BF | PIN No. | Output | | | |
| | | 1 | +Vo | | | |
| | | 2 | -Vo | | | |
| | | 3 | -Vo | | | |
| 4 | +Vo | | | | | |
| DIN 5 Pin (male) | Type No. | Pin Assignment | | Available (Current rating: 7.5A max.) | | |
|   | R1B | PIN No. | Output | | | |
| | | 1 | -Vo | | | |
| | | 2 | -Vo | | | |
| | | 3 | +Vo | | | |
| | | 4 | -Vo | | | |
| 5 | +Vo | | | | | |
| Stripped and tinned leads | Type No. | Pin Assignment | | None | | |
|   <p>Length of Land L1 by request (MW's standard length, L: 25 mm, L1: 5 mm)</p> | by customer | PIN No. | Output | | | |
| | | 1 | +Vo | | | |
| 2 | -Vo | | | | | |

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.