

Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK

Typical Applications


The HMC208AMS8 / HMC208AMS8E is ideal for:

- Base Stations
- PCMCIA Transceivers
- Cable Modems
- Portable Wireless

Features

- Ultra Small Package: MSOP8
- Conversion Loss: 9 dB
- LO / RF Isolation: 24 dB
- Input IP3: +17 dBm

Functional Diagram

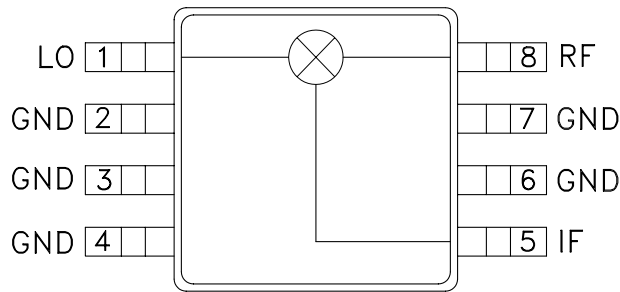

General Description

The HMC208AMS8 & HMC208AMS8E are ultra miniature double-balanced mixers in 8 lead plastic surface mount packages (MSOP). This passive MMIC mixer is constructed of GaAs Schottky diodes and novel planar transformer baluns on the chip. The device can be used as an upconverter, downconverter, biphasic (de)modulator, or phase comparator. The consistent MMIC performance will improve system operation and assure regulatory compliance.


Electrical Specifications, $T_A = +25^\circ \text{C}$, As a Function of LO Drive

Parameter	LO = +13 dBm IF = 70 MHz			LO = +10 dBm IF = 70 MHz			Units
	Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range, RF & LO	0.7 - 2.0			0.8 - 1.2			GHz
Frequency Range, IF	DC - 0.5			DC - 0.5			GHz
Conversion Loss		9	10.5		8.5	10.5	dB
Noise Figure (SSB)		9	10.5		8.5	10.5	dB
LO to RF Isolation	20	24		32	40		dB
LO to IF Isolation	13	17		22	30		dB
RF to IF Isolation	10	14		17	22		dB
IP3 (Input)	13	17		12	16		dBm
1 dB Gain Compression (Input)	7	10		5	8		dBm




GaAs MMIC SMT DOUBLE-BALANCED MIXER, 0.7 - 2.0 GHz


Conversion Loss vs Temperature @ LO = +13 dBm

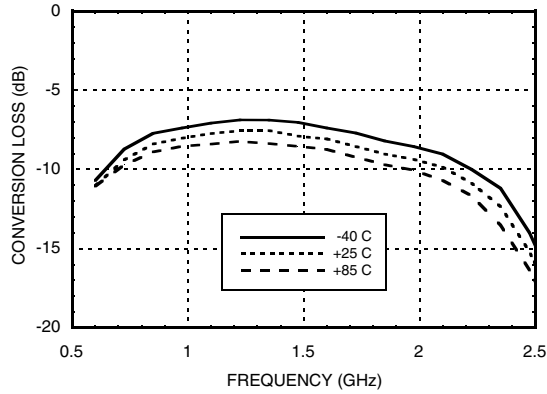


Isolation @ LO = +13 dBm

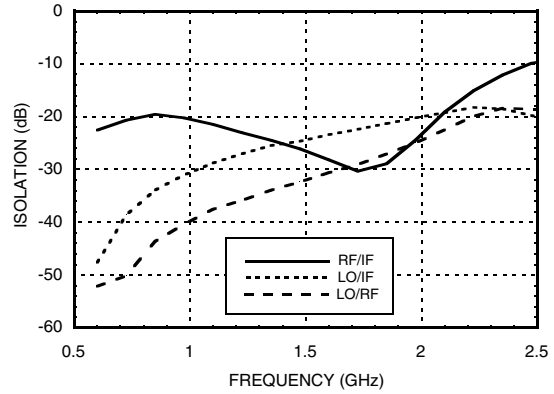


Conversion Loss vs. LO Drive

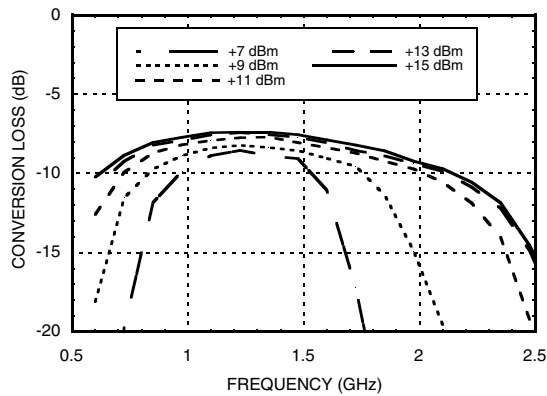


Return Loss @ LO = +13 dBm




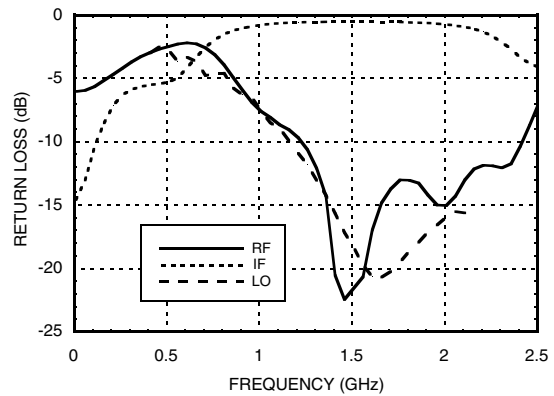


IF Bandwidth @ LO = +13 dBm

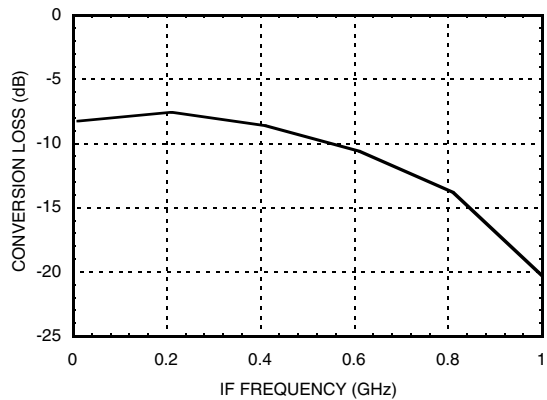

P1dB vs. Temperature @ LO = +13 dBm

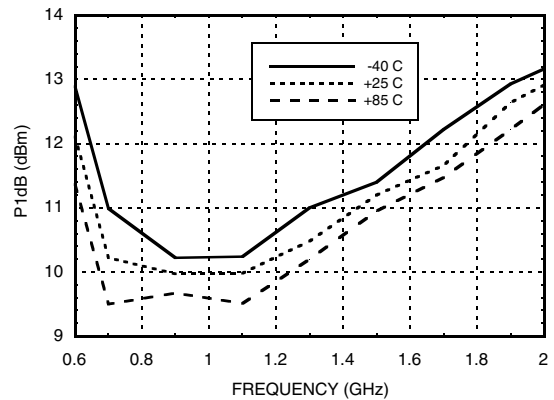

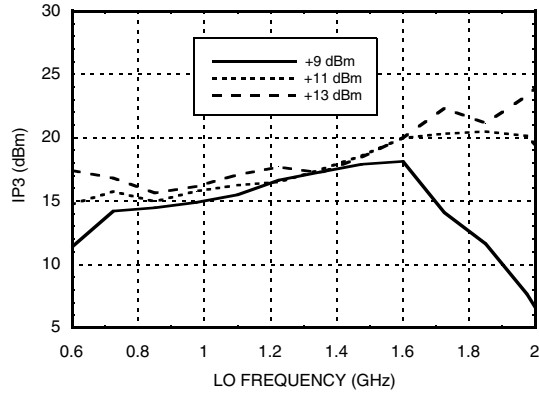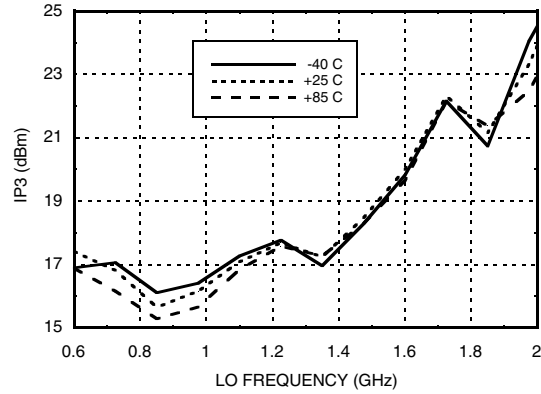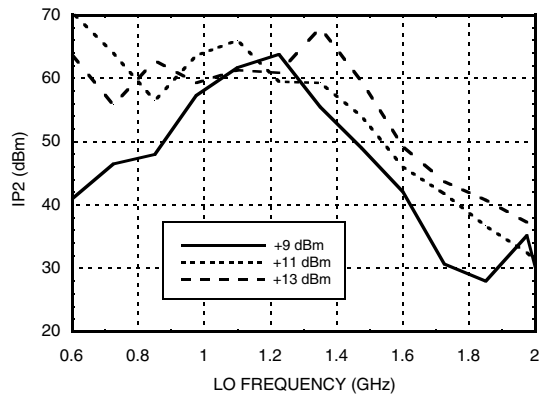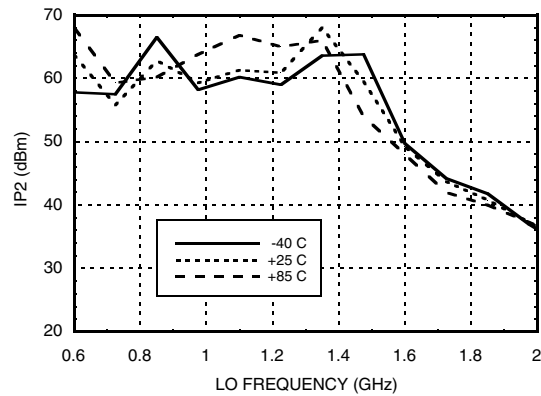GaAs MMIC SMT DOUBLE-BALANCED MIXER, 0.7 - 2.0 GHz
Input IP3 vs. LO Drive

Input IP3 vs. Temperature @ LO = +13 dBm

Input IP2 vs. LO Drive

Input IP2 vs. Temperature @ LO = +13 dBm




GaAs MMIC SMT DOUBLE-BALANCED MIXER, 0.7 - 2.0 GHz

MxN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	2	28	16	51
1	12	0	43	45	29
2	73	64	69	61	78
3	68	>95	87	63	92
4	>95	>95	>95	>95	>95

RF = 0.9 GHz @ -10 dBm
LO = 0.97 GHz @ +13 dBm
All values in dBc relative to the IF

Harmonics of LO

LO Freq. (GHz)	nLO Spur at RF Port			
	1	2	3	4
0.7	49	47	41	73
0.9	44	50	39	68
1.1	38	50	50	97
1.3	37	52	47	85
1.5	32	80	58	90
1.7	29	58	63	99


LO = +13 dBm
Values in dBc below input LO level measured at RF Port.



Absolute Maximum Ratings

RF / Input	+13 dBm
LO Drive	+27 dBm
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

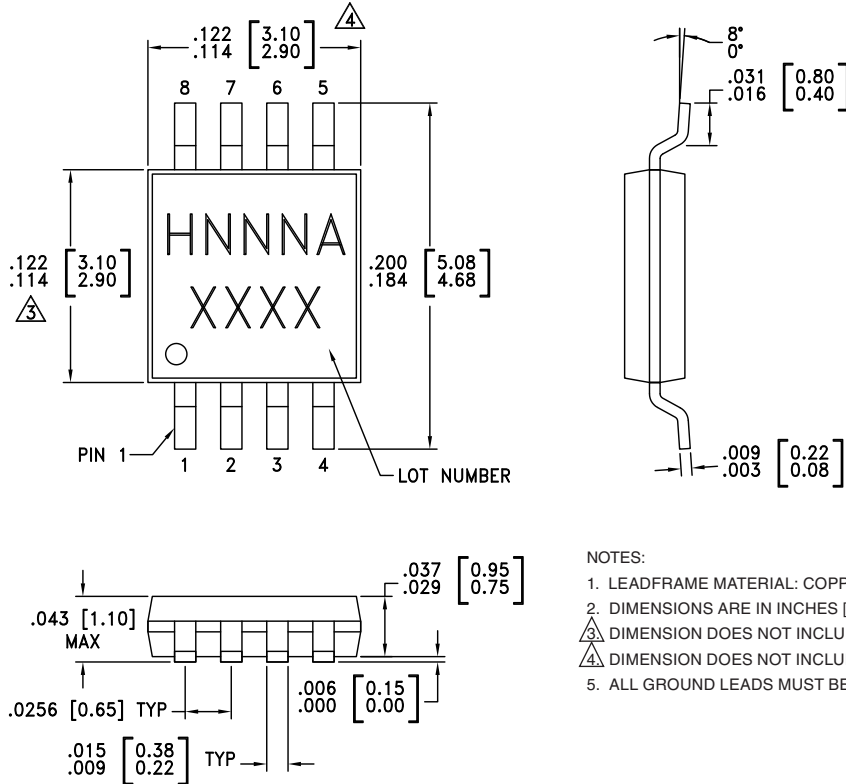Outline Drawing

NOTES:

- LEADFRAME MATERIAL: COPPER ALLOY
- DIMENSIONS ARE IN INCHES [MILLIMETERS]
-  DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15 mm PER SIDE.
-  DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25 mm PER SIDE.
- ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.


Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC208AMS8	Low Stress Injection Molding Plastic	Sn/Pb Solder	MSL1 ^[1]	H208A XXXX
HMC208AMS8E	RoHS-compliant Low Stress Injection Molding Plastic	100% matte Sn	MSL1 ^[2]	<u>H208A</u> XXXX

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

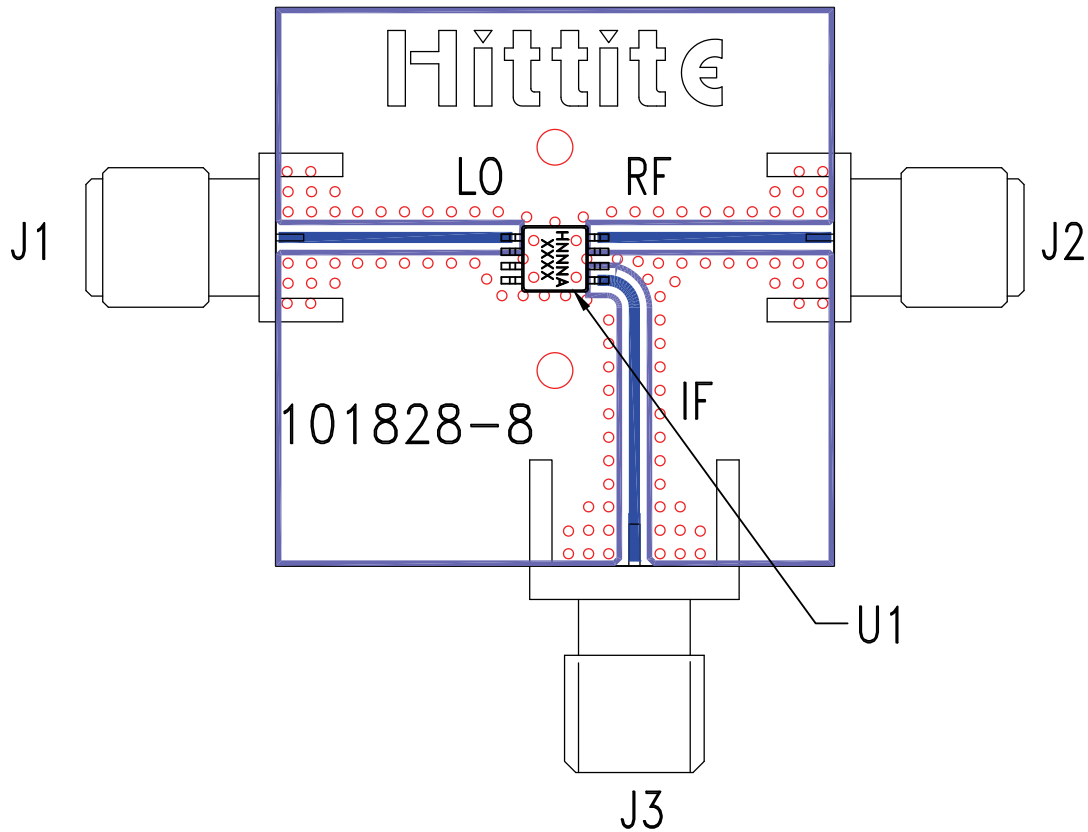Evaluation PCB

List of Materials for Evaluation PCB 101830 [1]

Item	Description
J1 - J3	PCB Mount SMA RF Connector
U1	HMC208AMS8 / HMC208AMS8E Mixer
PCB [2]	101828 Evaluation Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.