

PESS-08-12-L-06.00-SR

PESS-04-10-L-06.00-SR

(6.35 mm) .250"

PESS SERIES

POWERSTRIP[™]/40 CABLE ASSEMBLY

SPECIFICATIONS

For complete specifications
see www.samtec.com?PESS

Insulator Material:

Nylon Black

Contact Material:

Copper Alloy

Plating:

Sn or Au over

50 μ m (1.27 μ m) Ni

Latch:

Nylon Black

Operating Temp Range:

-30 °C to +105 °C

Voltage Rating:

600 VAC

846 VDC

Wire:

10 or 12 AWG

RoHS Compliant:

Yes

Mates with:
PET

PESS/PET	
WIRE GAUGE	CURRENT RATING (PER PIN)
10 AWG	34.5 A
12 AWG	29.7 A
1 PIN POWERED	

RUGGEDIZED
BY SAMTEC

• Positive latching

Dual leaf
blade
contacts

10 or 12 AWG
discrete wire
cable

Positive
latching system

(6.35 mm)
.250" pitch

RECOGNITIONS

For complete scope
of recognitions see
www.samtec.com/quality



COMPONENTS

- For body, see
www.samtec.com?IPS6
- For contacts, see
www.samtec.com?CC10L
www.samtec.com?CC10R

ALSO AVAILABLE (MOQ Required)

- Other platings

Note: Some sizes, styles
and options are non-standard,
non-returnable.

PESS

NO. OF POSITIONS

WIRE GAUGE

PLATING OPTION

ASSEMBLED LENGTH

END 1 OPTION

END 2 OPTION

-02, -04, -06, -08

-10

-12

-L

= 10 μ" (0.25 μm)

Gold on contact,

Matte Tin

on tail

-T

= Matte Tin

–“XX.XX”

= Wire Length

in inches

(152.4 mm)

06.00" min.

–SR

= Single

End

–DR

= Double

End

(Available with –DR only)

–NUS

= Notch up,

straight

–NDS


= Notch down,

straight

NO. OF POSITIONS	A	B	C
–02	(6.35) .250	(36.01) 1.418	(43.9) 1.73
–04	(19.05) .750	(48.71) 1.918	(56.6) 2.23
–06	(31.75) 1.250	(61.41) 2.418	(69.3) 2.73
–08	(44.45) 1.750	(74.11) 2.918	(82.0) 3.23

(9.50)

NO. OF POSITIONS	A	B	C
-02	(6.35) .250	(36.01) 1.418	(43.9) 1.73
-04	(19.05) .750	(48.71) 1.918	(56.6) 2.23
-06	(31.75) 1.250	(61.41) 2.418	(69.3) 2.73
-08	(44.45) 1.750	(74.11) 2.918	(82.0) 3.23

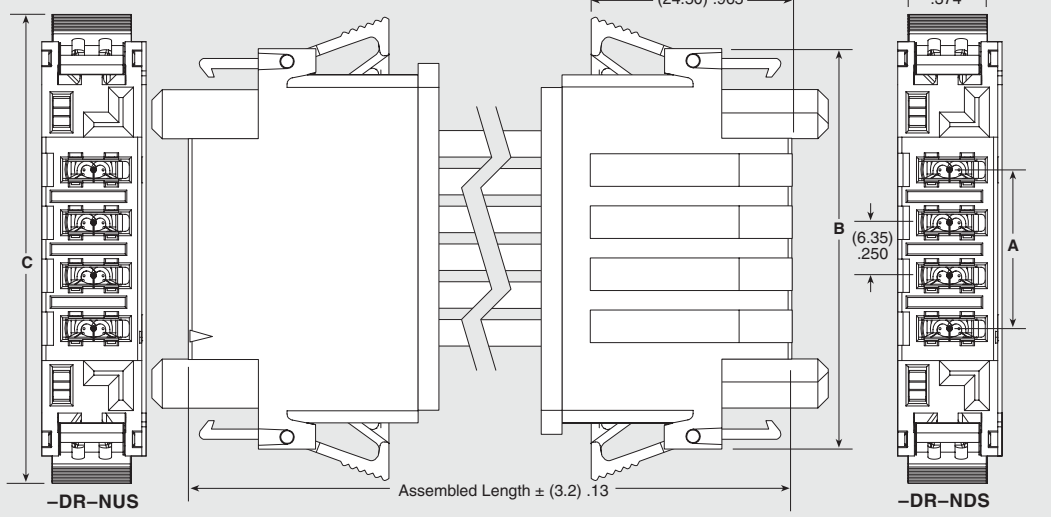

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.