

# EC2925TS-125.000M

[Click part number to visit Part Number Details page](#)

## REGULATORY COMPLIANCE (Data Sheet downloaded on Jul 29, 2020)



◀ Click badges to download compliance docs

Regulatory Compliance standards are subject to updates by governing bodies. Click the badges to download the latest compliance docs for this part number directly from Ecliptek.



## ITEM DESCRIPTION

Quartz Crystal Clock Oscillators XO (SPXO) LVCMOS (CMOS) 1.8Vdc 4 Pad 5.0mm x 7.0mm Ceramic Surface Mount (SMD) 125.000MHz ±25ppm -10°C to +70°C

## ELECTRICAL SPECIFICATIONS

|   |  |
|---|--|
| Nominal Frequency                             | 125.000MHz   |
| Frequency Tolerance/Stability                 | ±25ppm Maximum (Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, Shock, and Vibration) |
| Aging at 25°C                                 | ±5ppm/year Maximum   |
| Operating Temperature Range                   | -10°C to +70°C   |
| Supply Voltage                                | 1.8Vdc ±5%   |
| Input Current                                 | 25mA Maximum   |
| Output Voltage Logic High (Voh)               | 90% of Vdd Minimum (IOH = -4mA)  |
| Output Voltage Logic Low (Vol)                | 10% of Vdd Maximum (IOL = +4mA)  |
| Rise/Fall Time                                | 3nSec Maximum (Measured at 10% to 90% of waveform)   |
| Duty Cycle                                    | 50 ±10(%) (Measured at 50% of waveform)  |
| Load Drive Capability                         | 15pF Maximum   |
| Output Logic Type                             | CMOS   |
| Pin 1 Connection                              | Tri-State (High Impedance)   |
| Output Control Input Voltage Logic High (Vih) | 90% of Vdd Minimum or No Connect to Enable Output  |
| Output Control Input Voltage Logic Low (Vil)  | 10% of Vdd Maximum to Disable Output (High Impedance)  |
| Standby Current                               | 10µA Maximum (Disabled Output, High Impedance)   |
| RMS Phase Jitter                              | 1pSec Maximum (12kHz to 20MHz offset frequency)  |
| Start Up Time                                 | 10mSec Maximum   |
| Storage Temperature Range                     | -55°C to +125°C  |

## ENVIRONMENTAL & MECHANICAL SPECIFICATIONS

|                              |   |
|------------------------------|---|
| ESD Susceptibility           | MIL-STD-883, Method 3015, Class 1, HBM: 1500V |
| Fine Leak Test               | MIL-STD-883, Method 1014, Condition A         |
| Flammability                 | UL94-V0                                       |
| Gross Leak Test              | MIL-STD-883, Method 1014, Condition C         |
| Mechanical Shock             | MIL-STD-883, Method 2002, Condition B         |
| Moisture Resistance          | MIL-STD-883, Method 1004                      |
| Moisture Sensitivity         | J-STD-020, MSL 1                              |
| Resistance to Soldering Heat | MIL-STD-202, Method 210, Condition K          |
| Resistance to Solvents       | MIL-STD-202, Method 215                       |
| Solderability                | MIL-STD-883, Method 2003                      |
| Temperature Cycling          | MIL-STD-883, Method 1010, Condition B         |
| Vibration                    | MIL-STD-883, Method 2007, Condition A         |

## EC2925TS-125.000M [Click part number to visit Part Number Details page](#)

### MECHANICAL DIMENSIONS (all dimensions in millimeters)



| PIN | CONNECTION     |
|-----|----------------|
| 1   | Tri-State      |
| 2   | Case/Ground    |
| 3   | Output         |
| 4   | Supply Voltage |

| LINE | MARKING   |
|------|---|
| 1    | ECLIPTEK  |
| 2    | 125.00M   |
| 3    | XXXXXX<br>XXXXXX=Ecliptek<br>Manufacturing Identifier |

### Suggested Solder Pad Layout

All Dimensions in Millimeters



All Tolerances are ±0.1

# EC2925TS-125.000M [Click part number to visit Part Number Details page](#)


## OUTPUT WAVEFORM & TIMING DIAGRAM



# EC2925TS-125.000M

[Click part number to visit Part Number Details page](#)

## Test Circuit for CMOS Output

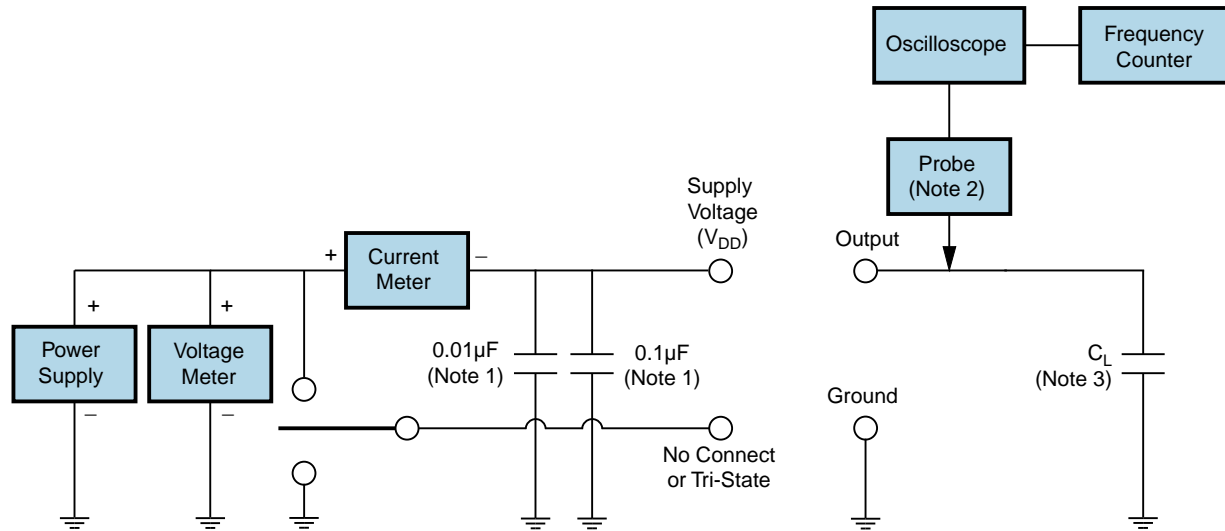

Note 1: An external  $0.1\mu\text{F}$  low frequency tantalum bypass capacitor in parallel with a  $0.01\mu\text{F}$  high frequency ceramic bypass capacitor close to the package ground and  $V_{DD}$  pin is required.

Note 2: A low capacitance ( $<12\text{pF}$ ), 10X attenuation factor, high impedance ( $>10\text{Mohms}$ ), and high bandwidth ( $>300\text{MHz}$ ) passive probe is recommended.

Note 3: Capacitance value  $C_L$  includes sum of all probe and fixture capacitance.

# EC2925TS-125.000M

[Click part number to visit Part Number Details page](#)

## Recommended Solder Reflow Methods



### High Temperature Infrared/Convection

|   |  |
|---|--|
| <b><math>T_s \text{ MAX}</math> to <math>T_L</math> (Ramp-up Rate)</b>            | $3^\circ\text{C/Second Maximum}$                   |
| <b>Preheat</b>  |  |
| - Temperature Minimum ( $T_s \text{ MIN}$ )                                       | $150^\circ\text{C}$                                |
| - Temperature Typical ( $T_s \text{ TYP}$ )                                       | $175^\circ\text{C}$                                |
| - Temperature Maximum ( $T_s \text{ MAX}$ )                                       | $200^\circ\text{C}$                                |
| - Time ( $t_s \text{ MIN}$ )  | 60 - 180 Seconds                                   |
| <b>Ramp-up Rate (<math>T_L</math> to <math>T_P</math>)</b>                        | $3^\circ\text{C/Second Maximum}$                   |
| <b>Time Maintained Above:</b>   |  |
| - Temperature ( $T_L$ )   | $217^\circ\text{C}$                                |
| - Time ( $t_L$ )  | 60 - 150 Seconds                                   |
| <b>Peak Temperature (<math>T_P</math>)</b>  | $260^\circ\text{C Maximum for 10 Seconds Maximum}$ |
| <b>Target Peak Temperature (<math>T_P \text{ Target}</math>)</b>                  | $250^\circ\text{C} +0/-5^\circ\text{C}$            |
| <b>Time within <math>5^\circ\text{C}</math> of actual peak (<math>t_p</math>)</b> | 20 - 40 Seconds                                    |
| <b>Ramp-down Rate</b>   | $6^\circ\text{C/Second Maximum}$                   |
| <b>Time <math>25^\circ\text{C}</math> to Peak Temperature (t)</b>                 | 8 Minutes Maximum                                  |
| <b>Moisture Sensitivity Level</b>   | Level 1  |
| <b>Additional Notes</b>   | Temperatures shown are applied to body of device.  |

# EC2925TS-125.000M

[Click part number to visit Part Number Details page](#)

## Recommended Solder Reflow Methods



### Low Temperature Infrared/Convection 240°C

|  |  |
|--|--|
| $T_s$ MAX to $T_L$ (Ramp-up Rate)                          | 5°C/Second Maximum                                     |
| <b>Preheat</b>   |  |
| - Temperature Minimum ( $T_s$ MIN)                         | N/A  |
| - Temperature Typical ( $T_s$ TYP)                         | 150°C  |
| - Temperature Maximum ( $T_s$ MAX)                         | N/A  |
| - Time ( $t_s$ MIN)  | 60 - 120 Seconds                                       |
| <b>Ramp-up Rate (<math>T_L</math> to <math>T_P</math>)</b> | 5°C/Second Maximum                                     |
| <b>Time Maintained Above:</b>                              |  |
| - Temperature ( $T_L$ )                                    | 150°C  |
| - Time ( $t_L$ )   | 200 Seconds Maximum                                    |
| <b>Peak Temperature (<math>T_P</math>)</b>                 | 240°C Maximum  |
| <b>Target Peak Temperature (<math>T_P</math> Target)</b>   | 240°C Maximum 2 Times / 230°C Maximum 1 Time           |
| <b>Time within 5°C of actual peak (<math>t_p</math>)</b>   | 10 Seconds Maximum 2 Times / 80 Seconds Maximum 1 Time |
| <b>Ramp-down Rate</b>                                      | 5°C/Second Maximum                                     |
| <b>Time 25°C to Peak Temperature (t)</b>                   | N/A  |
| <b>Moisture Sensitivity Level</b>                          | Level 1  |
| <b>Additional Notes</b>                                    | Temperatures shown are applied to body of device.      |

### Low Temperature Manual Soldering

185°C Maximum for 10 Seconds Maximum, 2 times Maximum. (Temperatures shown are applied to body of device.)

### High Temperature Manual Soldering

260°C Maximum for 5 Seconds Maximum, 2 times Maximum. (Temperatures shown are applied to body of device.)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ecliptek:](#)

[EC2925TS-125.000M](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.