
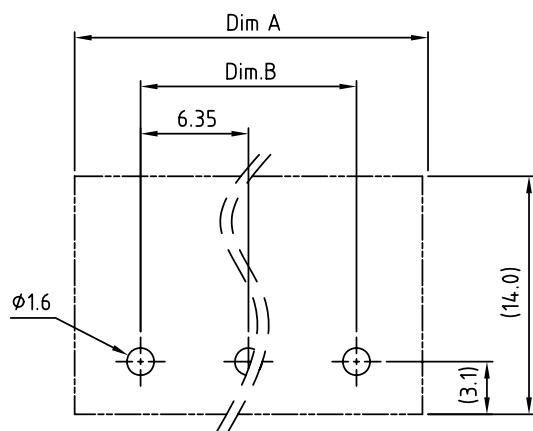
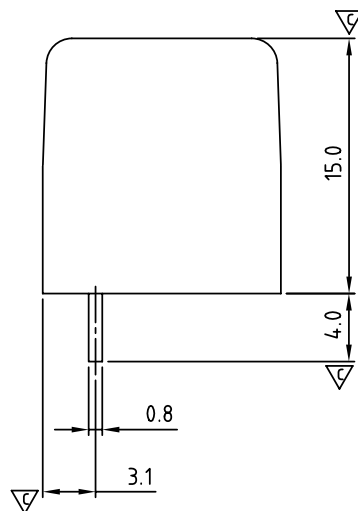
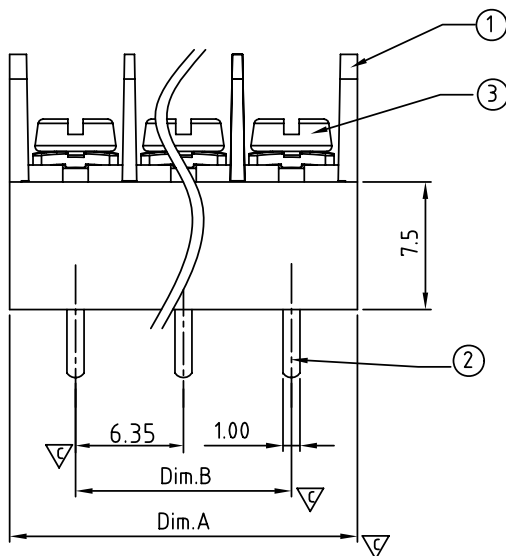


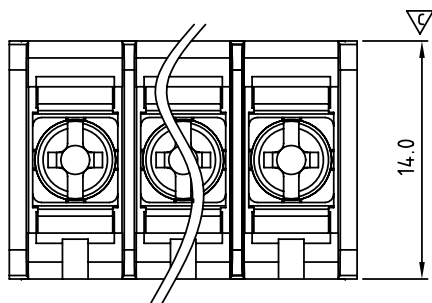

P.C.B Layout(Top View)

N= Number of poles Δ

$$\text{Dim.A} = (N-1) \times 6.35 + 7.75$$

$$\text{Dim.B} = (N-1) \times 6.35$$

POLE	2P~8P	9P~16P	17P~24P	25P~30P
Dim.B	±0.20	±0.30	±0.40	±0.50
Dim.A	±0.30	±0.40	±0.50	±0.60

SIGN	DATE	APPROVER
Δ	2/07'06	Part No. changed Tony
Δ	10/20'06	Demention A changed Steady
Δ	10/28'10	Rated voltage is chaged form 250 V to 300 V Aaron
Δ	10/28'10	Torque is changed from 6.1 Lb-In to 6.5 Lb-In Aaron
Δ	10/28'10	Tolerance is changed Aaron
Δ	12/05'12	Change the screw plating specification Jacky
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY Y!!!		

MATERIALS ELECTRICAL

- Δ RATED VOLTAGE & CURRENT: 300 V, 10 A
 WITHSTAND VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 M Ω OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANG: -40 °C ~ +115 °C
 Δ SCREW TORQUE VALUE: 6.5 Lb-In.
 WIRE RANGE: 22 - 16AWG
 1) MOLDED PARTS: POLYIMIDE 66, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 Δ 3) TERMINAL SCREWS: STEEL, M3

APPROVAL: 
 PART NO.:
 Critical dimension: ∇

YK 211 xx 0 x x 00G

NO. OF POLES
 02: 2 POLES
 03: 3 POLES
 04: 4 POLES
 ...
 30: 30 POLES

G: RoHS compliant
 (lead<4%)
 In copper Alloy

MARK
 0: "@" MARK
 1: "ANY" MARK

TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F
 Δ 1: TERMINAL: G/F, SCREW: Zinc
 2: TERMINAL: Sn, SCREW: G/F
 Δ 3: TERMINAL: Sn, SCREW: Zinc

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YK-211 Series 2P-30P					
PART NO.	YK211xx0xx00G			DWG NO.	8YK0001-211	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Jacky 2012.12.05	Jacky 2012.12.05		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
						X.XX ±0.10
						X° ±1°
				SHEET: 01/01	REV.: F	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.