


## Dual Common Cathode Schottky Rectifier

### FEATURES

- Low power loss, high efficiency
- Guardring for overvoltage protection
- High surge current capability
- UL Recognized File # E-326243
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition


**TO-247AD (TO-3P)**


### MECHANICAL DATA

**Case:** TO-247AD (TO-3P)

Molding compound, UL flammability classification rating 94V-0

Base P/N with suffix "G" on packing code - halogen-free

Base P/N with prefix "H" on packing code - AEC-Q101 qualified

**Terminal:** Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 1A whisker test

with prefix "H" on packing code meet JESD 201 class 2 whisker test

**Polarity:** As marked

**Mounting torque:** 10 in-lbs maximum

**Weight:** 6.1 g (approximately)

| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T <sub>A</sub> =25°C unless otherwise noted)                                                                                                                                         |                    |                   |                   |                   |                   |                   |                    |                    |                    |      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------|-------------------|-------------------|-------------------|-------------------|--------------------|--------------------|--------------------|------|
| PARAMETER                                                                                                                                                                                                                            | SYMBOL             | MBR<br>2035<br>PT | MBR<br>2045<br>PT | MBR<br>2050<br>PT | MBR<br>2060<br>PT | MBR<br>2090<br>PT | MBR<br>20100<br>PT | MBR<br>20150<br>PT | MBR<br>20200<br>PT | UNIT |
| Maximum repetitive peak reverse voltage                                                                                                                                                                                              | V <sub>RRM</sub>   | 35                | 45                | 50                | 60                | 90                | 100                | 150                | 200                | V    |
| Maximum RMS voltage                                                                                                                                                                                                                  | V <sub>RMS</sub>   | 24                | 31                | 35                | 42                | 63                | 70                 | 105                | 140                | V    |
| Maximum DC blocking voltage                                                                                                                                                                                                          | V <sub>DC</sub>    | 35                | 45                | 50                | 60                | 90                | 100                | 150                | 200                | V    |
| Maximum average forward rectified current                                                                                                                                                                                            | I <sub>F(AV)</sub> | 20                |                   |                   |                   |                   |                    |                    |                    | A    |
| Peak repetitive forward current<br>(Rated V <sub>R</sub> , Square wave, 20KHz)                                                                                                                                                       | I <sub>FRM</sub>   | 20                |                   |                   |                   |                   |                    |                    |                    | A    |
| Peak forward surge current, 8.3 ms single half sine-wave<br>superimposed on rated load                                                                                                                                               | I <sub>FSM</sub>   | 150               |                   |                   |                   |                   |                    |                    |                    | A    |
| Peak repetitive reverse surge Current (Note 1)                                                                                                                                                                                       | I <sub>RRM</sub>   | 1.0               |                   | 0.5               |                   |                   |                    |                    | A                  |      |
| Maximum instantaneous forward voltage (Note 2)<br>I <sub>F</sub> =10A, T <sub>J</sub> =25°C<br>I <sub>F</sub> =10A, T <sub>J</sub> =125°C<br>I <sub>F</sub> =20A, T <sub>J</sub> =25°C<br>I <sub>F</sub> =20A, T <sub>J</sub> =125°C | V <sub>F</sub>     | -                 |                   | 0.80              |                   | 0.85              |                    | 0.95               |                    | V    |
|                                                                                                                                                                                                                                      |                    | 0.57              |                   | 0.70              |                   | 0.75              |                    | 0.92               |                    |      |
|                                                                                                                                                                                                                                      |                    | 0.84              |                   | 0.95              |                   | 0.95              |                    | 1.02               |                    |      |
|                                                                                                                                                                                                                                      |                    | 0.72              |                   | 0.85              |                   | 0.85              |                    | 0.98               |                    |      |
| Maximum reverse current @ rated VR    T <sub>J</sub> =25 °C<br>                                                                                                                                                                      |                    |                   |                   |                   |                   |                   |                    |                    |                    |      |

Note 1: 2.0μs Pulse Width, f=1.0KHz

Note 2: Pulse Test : 300μs Pulse Width, 1% Duty Cycle

**ORDERING INFORMATION**

| PART NO.              | AEC-Q101<br>QUALIFIED | PACKING CODE | GREEN COMPOUND<br>CODE | PACKAGE | PACKING   |
|-----------------------|-----------------------|--------------|------------------------|---------|-----------|
| MBR20xxPT<br>(Note 1) | Prefix "H"            | C0           | Suffix "G"             | TO-3P   | 30 / Tube |

Note 1: "xx" defines voltage from 35V (MBR2035PT) to 200V (MBR20200PT)

**EXAMPLE**

| PREFERRED P/N | PART NO.  | AEC-Q101<br>QUALIFIED | PACKING CODE | GREEN COMPOUND<br>CODE | DESCRIPTION        |
|---------------|-----------|-----------------------|--------------|------------------------|--------------------|
| MBR2060PT C0  | MBR2060PT |                       | C0           |                        |                    |
| MBR2060PT C0G | MBR2060PT |                       | C0           | G                      | Green compound     |
| MBR2060PTH0   | MBR2060PT | H                     | C0           |                        | AEC-Q101 qualified |

**RATINGS AND CHARACTERISTICS CURVES**

(TA=25°C unless otherwise noted)

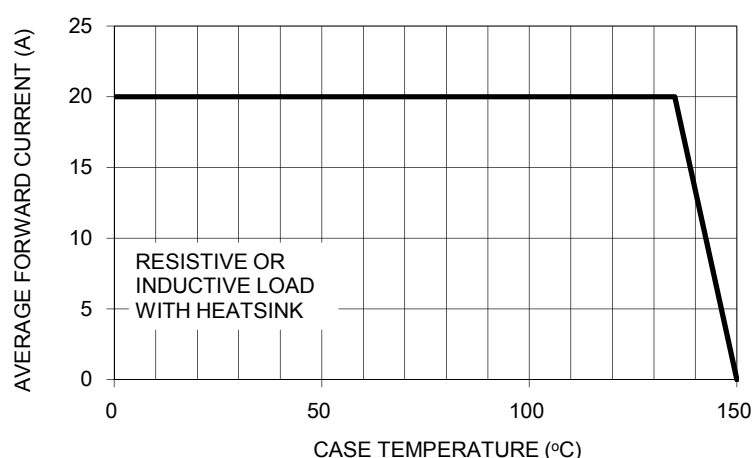
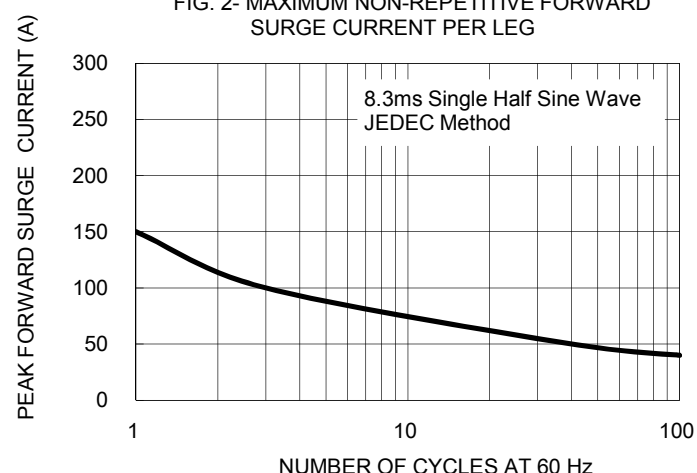
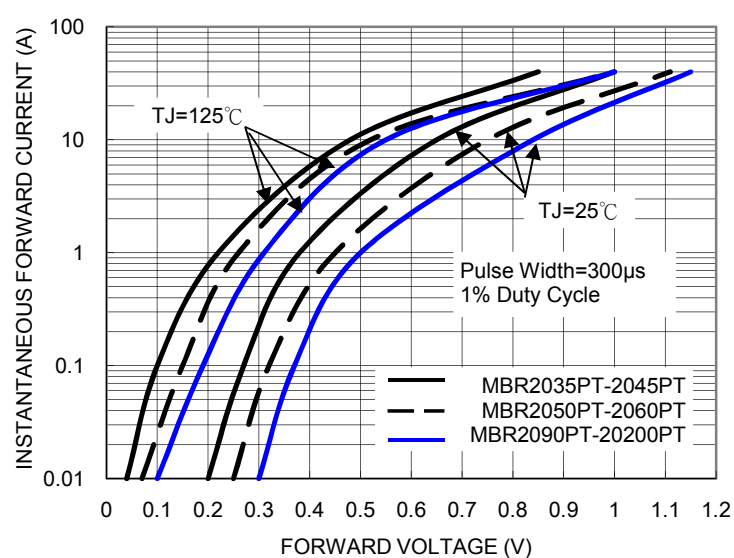
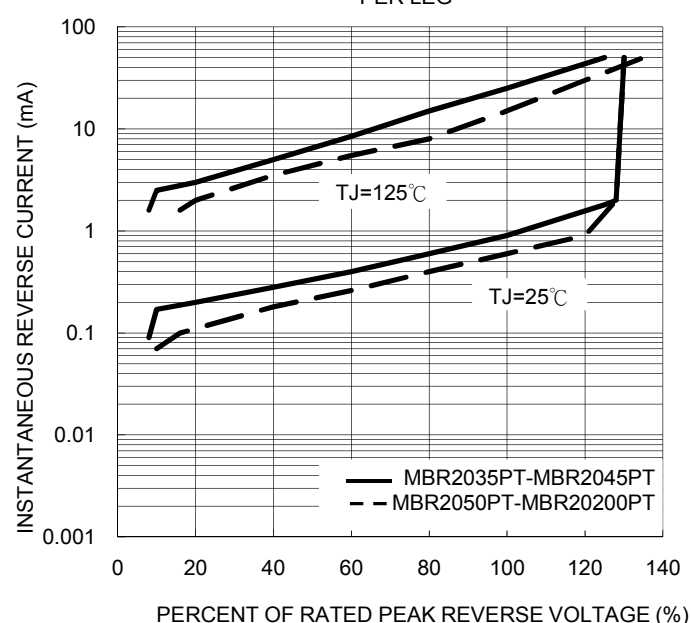
**FIG. 1- FORWARD CURRENT DERATING CURVE**

**FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG**

**FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG**

**FIG. 4- TYPICAL REVERSE CHARACTERISTICS PER LEG**


FIG. 5- TYPICAL JUNCTION CAPACITANCE PER LEG

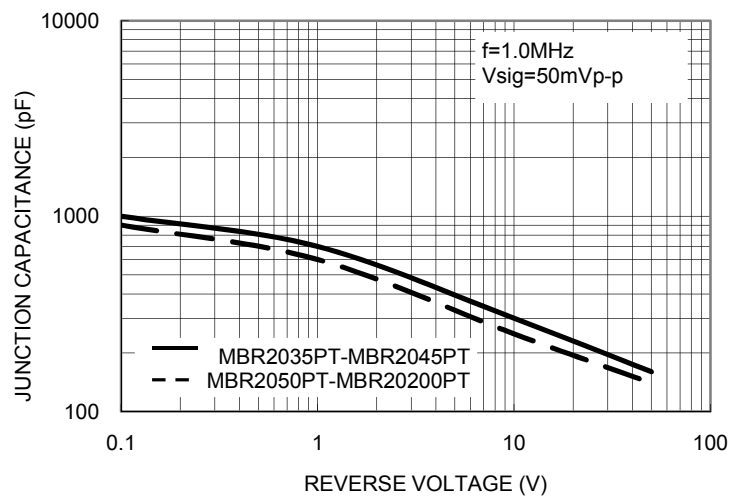
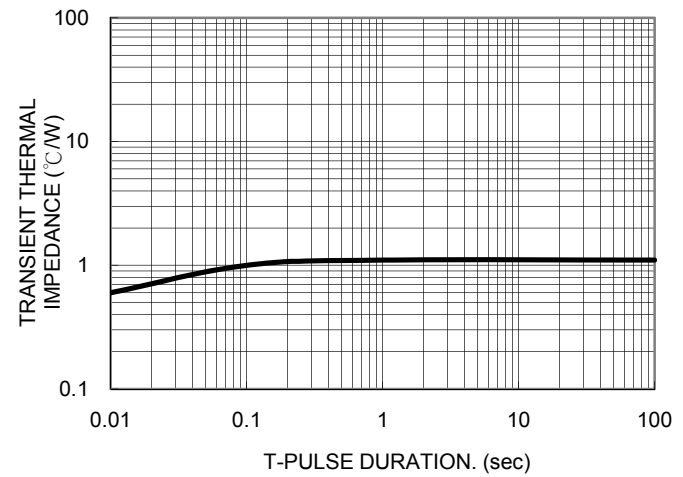
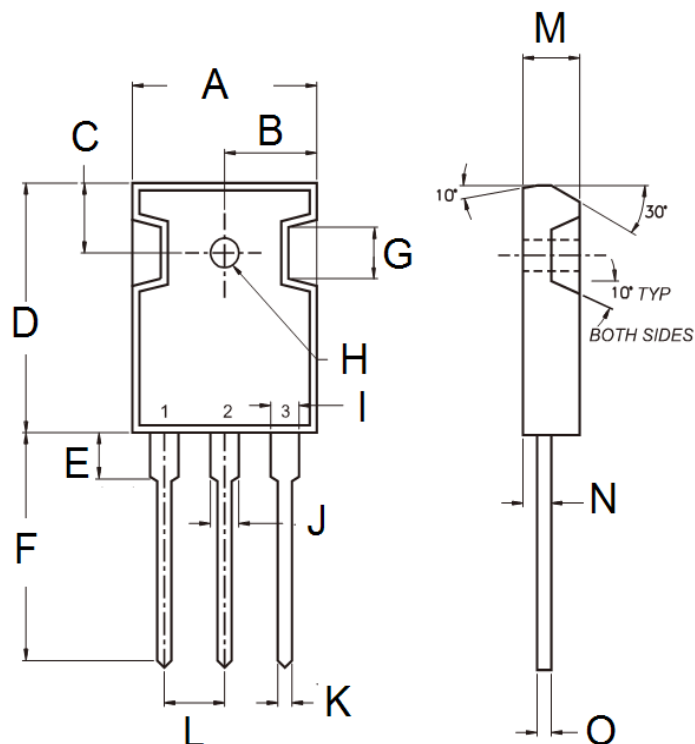


FIG. 6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG



## PACKAGE OUTLINE DIMENSIONS



| DIM. | Unit (mm) |       | Unit (inch) |       |
|------|-----------|-------|-------------|-------|
|      | Min       | Max   | Min         | Max   |
| A    | 15.90     | 16.40 | 0.626       | 0.646 |
| B    | 7.90      | 8.20  | 0.311       | 0.323 |
| C    | 5.70      | 6.20  | 0.224       | 0.244 |
| D    | 20.80     | 21.30 | 0.819       | 0.839 |
| E    | 3.50      | 4.10  | 0.138       | 0.161 |
| F    | 19.70     | 20.20 | 0.776       | 0.795 |
| G    | -         | 4.30  | -           | 0.169 |
| H    | 2.90      | 3.40  | 0.114       | 0.134 |
| I    | 1.93      | 2.18  | 0.076       | 0.086 |
| J    | 2.97      | 3.22  | 0.117       | 0.127 |
| K    | 1.12      | 1.22  | 0.044       | 0.048 |
| L    | 5.20      | 5.70  | 0.205       | 0.224 |
| M    | 4.90      | 5.16  | 0.193       | 0.203 |
| N    | 2.70      | 3.00  | 0.106       | 0.118 |
| O    | 0.51      | 0.76  | 0.020       | 0.030 |

## MARKING DIAGRAM



P/N = Marking Code  
G = Green Compound  
YWW = Date Code  
F = Factory Code

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.