



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		A	RELEASED PER ECO-14-008758	13JUN2014	CJV	PAR
			B	REVISED PER ECO-15-010819	10AUG2015	PP	SH

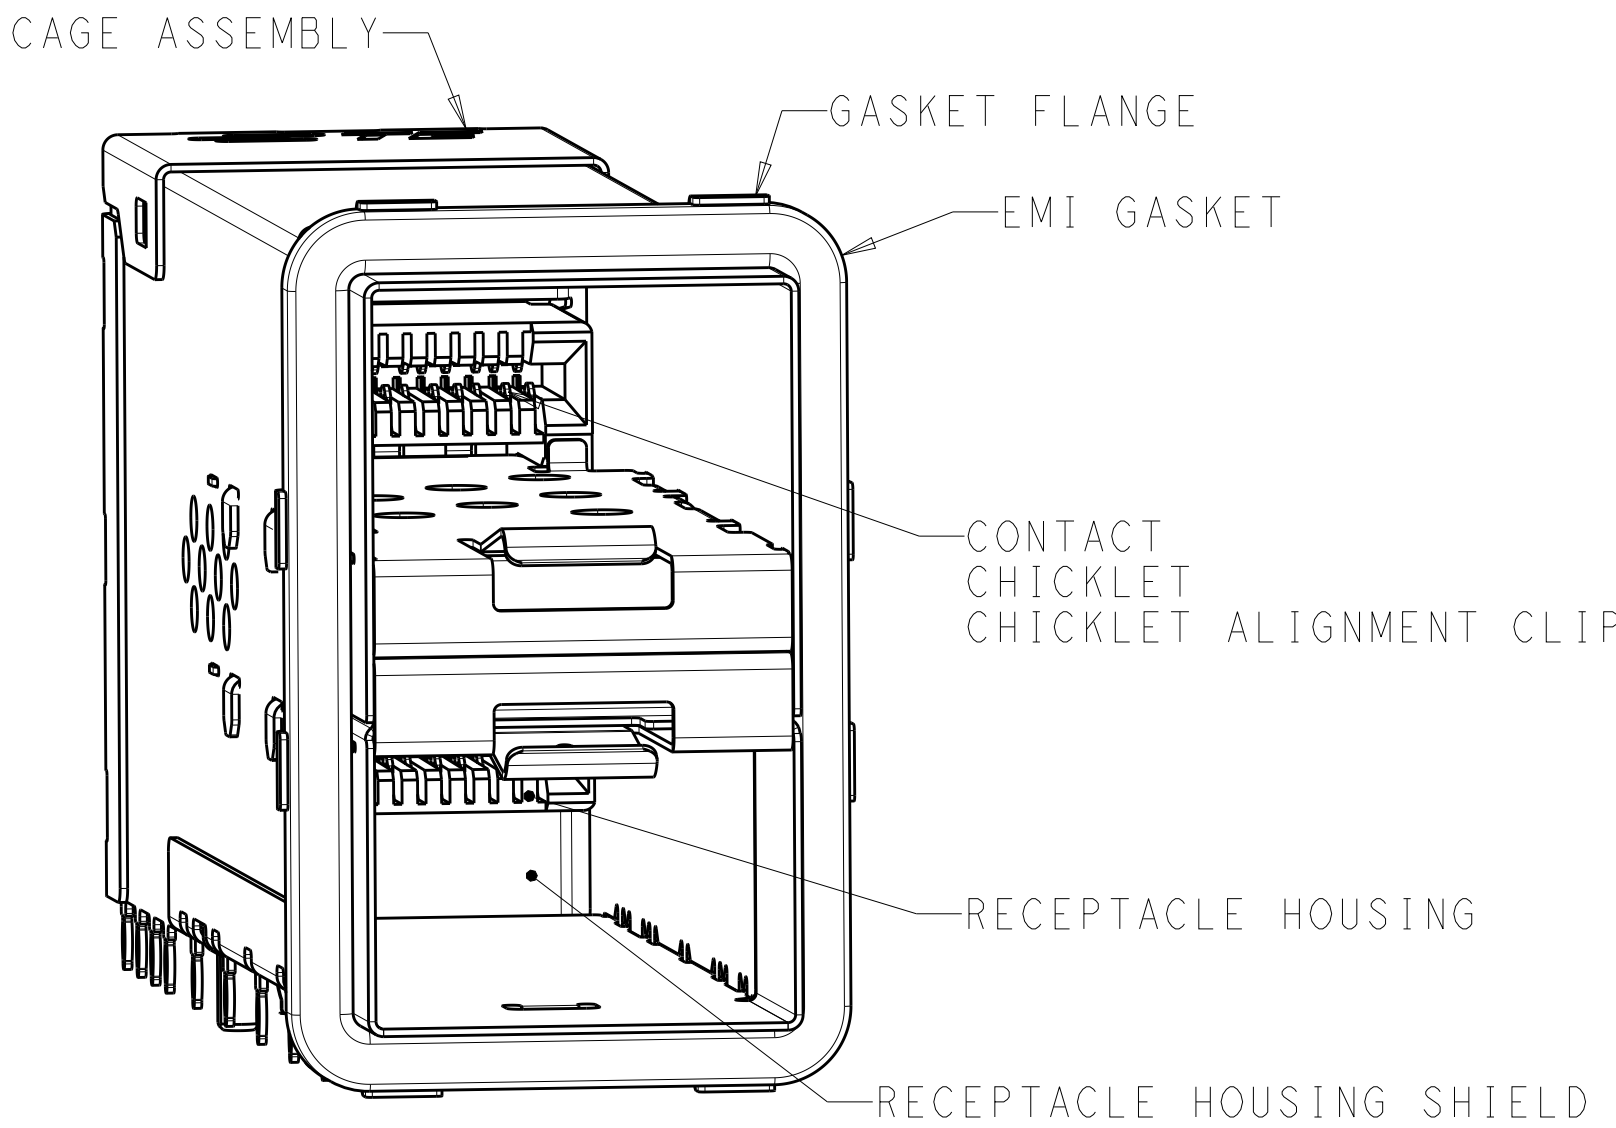

2198318-1
SCALE 4:1

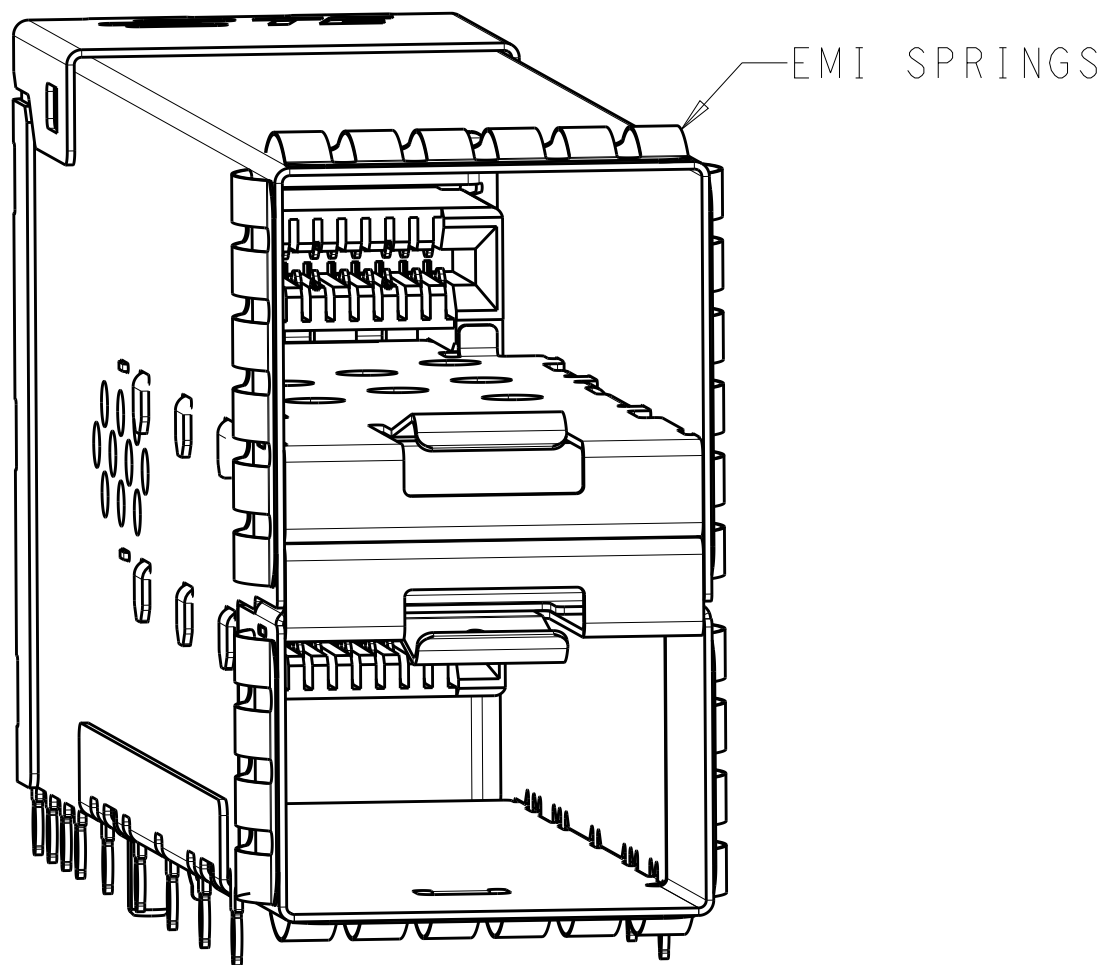


2198318-5
SCALE 4:1

1. MATERIALS:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY PER ASTM B 122
CONNECTOR HOUSING - LCP, BLACK, UL 94V-O RATED
CONNECTOR HOUSING SHIELD - COPPER ALLOY
CHICKLET - LCP, BLACK, UL 94V-O RATED
CHICKLET ALIGNMENT CLIP - PBT
CONTACT - COPPER ALLOY
EMI GASKET - ELASTOMERIC
GASKET FLANGE - STAINLESS STEEL
EMI SPRINGS - PHOSPHOR BRONZE PER ASTM B 103,
0.8µm MIN TIN PER ASTM B 545
LIGHT PIPE - POLYCARBONATE
LIGHT PIPE HOUSING - ZINC ALLOY


2. CONTACT FINISH:
CONFORMS TO THE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2481, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE

3. PCB MINIMUM THICKNESS = 1.5mm


4. FOR HOLE SIZE AND PLATINGS, SEE APPLICATION SPECIFICATION 114-13319
5. LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE LED PACKAGE WITH A HEIGHT OF 0.8mm
6. DIMENSIONS APPLY FOR EMI SPRINGS ONLY
7. THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES, TOP SIDE ONLY, TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN

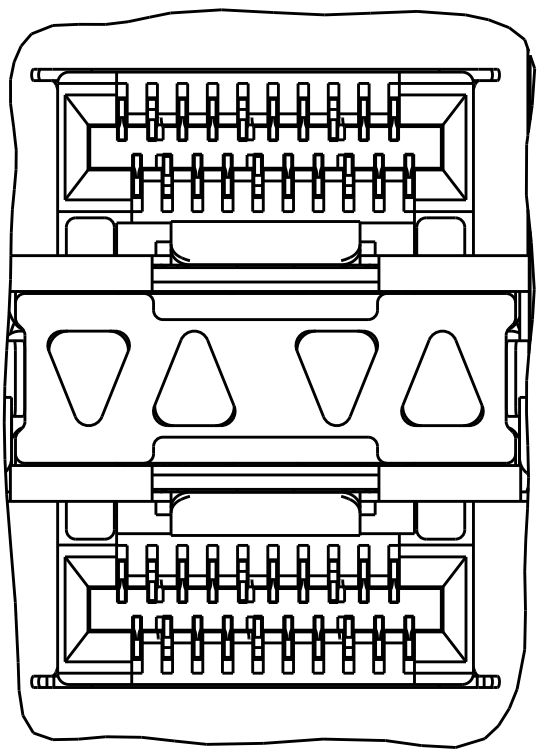


INNER/OUTER LIGHT PIPES
2198318-2, 2198318-6
SCALE 5:1

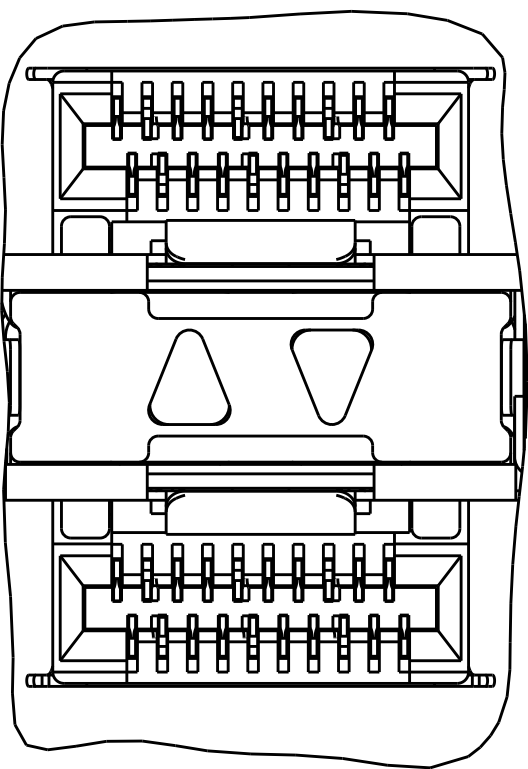


INNER LIGHT PIPES
2198318-3, 2198318-7
SCALE 5:1

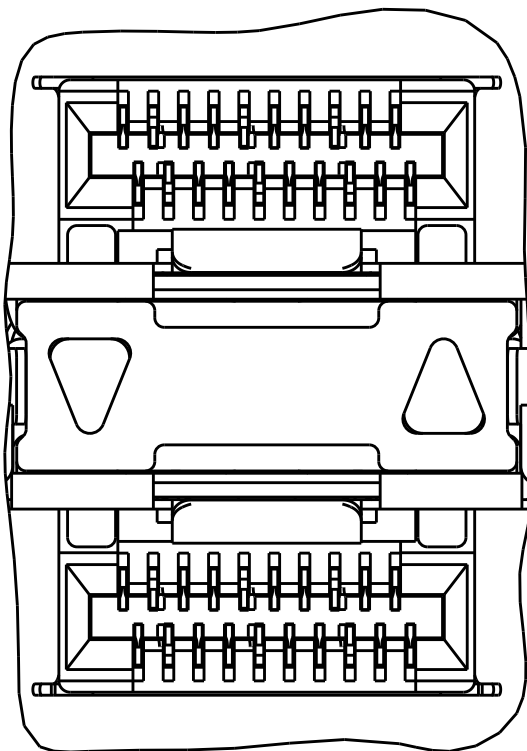

OUTER LIGHT PIPES
2198318-4, 2198318-8
SCALE 5:1

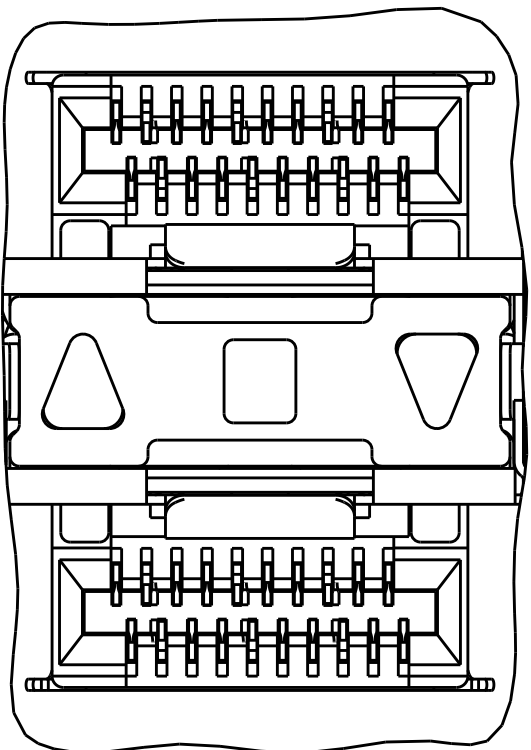


CENTER/REVERSED OUTER LIGHT PIPES
1-2198318-7, 1-2198318-9
SCALE 5:1

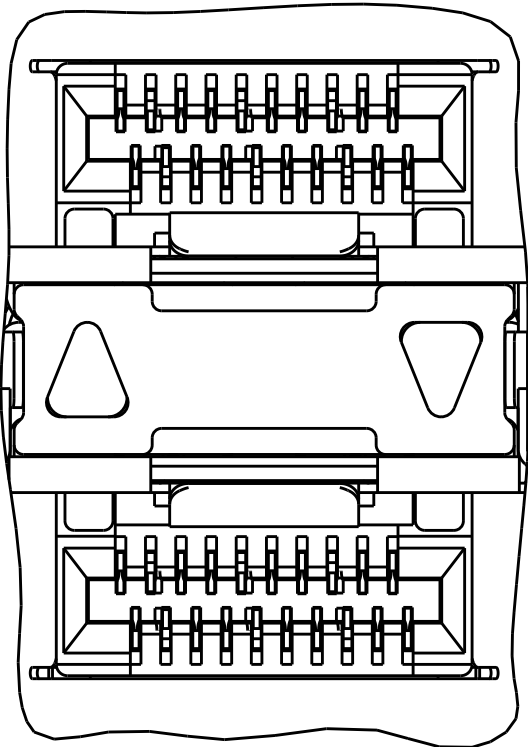

REVERSED OUTER LIGHT PIPES
1-2198318-8, 2-2198318-0
SCALE 5:1

16.75	EMI SPRINGS	REVERSED OUTER	2-2198318-0
		CENTER/REVERSED OUTER	1-2198318-9
19.5	EMI GASKET	REVERSED OUTER	1-2198318-8
		CENTER/REVERSED OUTER	1-2198318-7
16.75	EMI SPRINGS	OUTER	2198318-8
		INNER	2198318-7
		INNER/OUTER	2198318-6
		NONE	2198318-5
19.5	EMI GASKET	OUTER	2198318-4
		INNER	2198318-3
		INNER/OUTER	2198318-2
		NONE	2198318-1
(E)	CAGE TYPE	LIGHT PIPE CONFIGURATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONWHER 17OCT2011	 TE Connectivity	
DIMENSIONS:		CHK M.D. MORRISON 18OCT2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.D. MORRISON 18OCT2011	NAME RECEPTACLE ASSEMBLY, 2X1, STACKED, zSFP+	
		PRODUCT SPEC		
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	108-2481	SIZE CAGE CODE DRAWING NO	RESTRICTED TO
		APPLICATION SPEC		
MATERIAL SEE NOTES	FINISH SEE NOTES	114-13319	A100779C=2198318	-
		WEIGHT		
Customer Drawing		SCALE 4:1	SHEET 1 OF 4	REV B



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

D





C

B

A

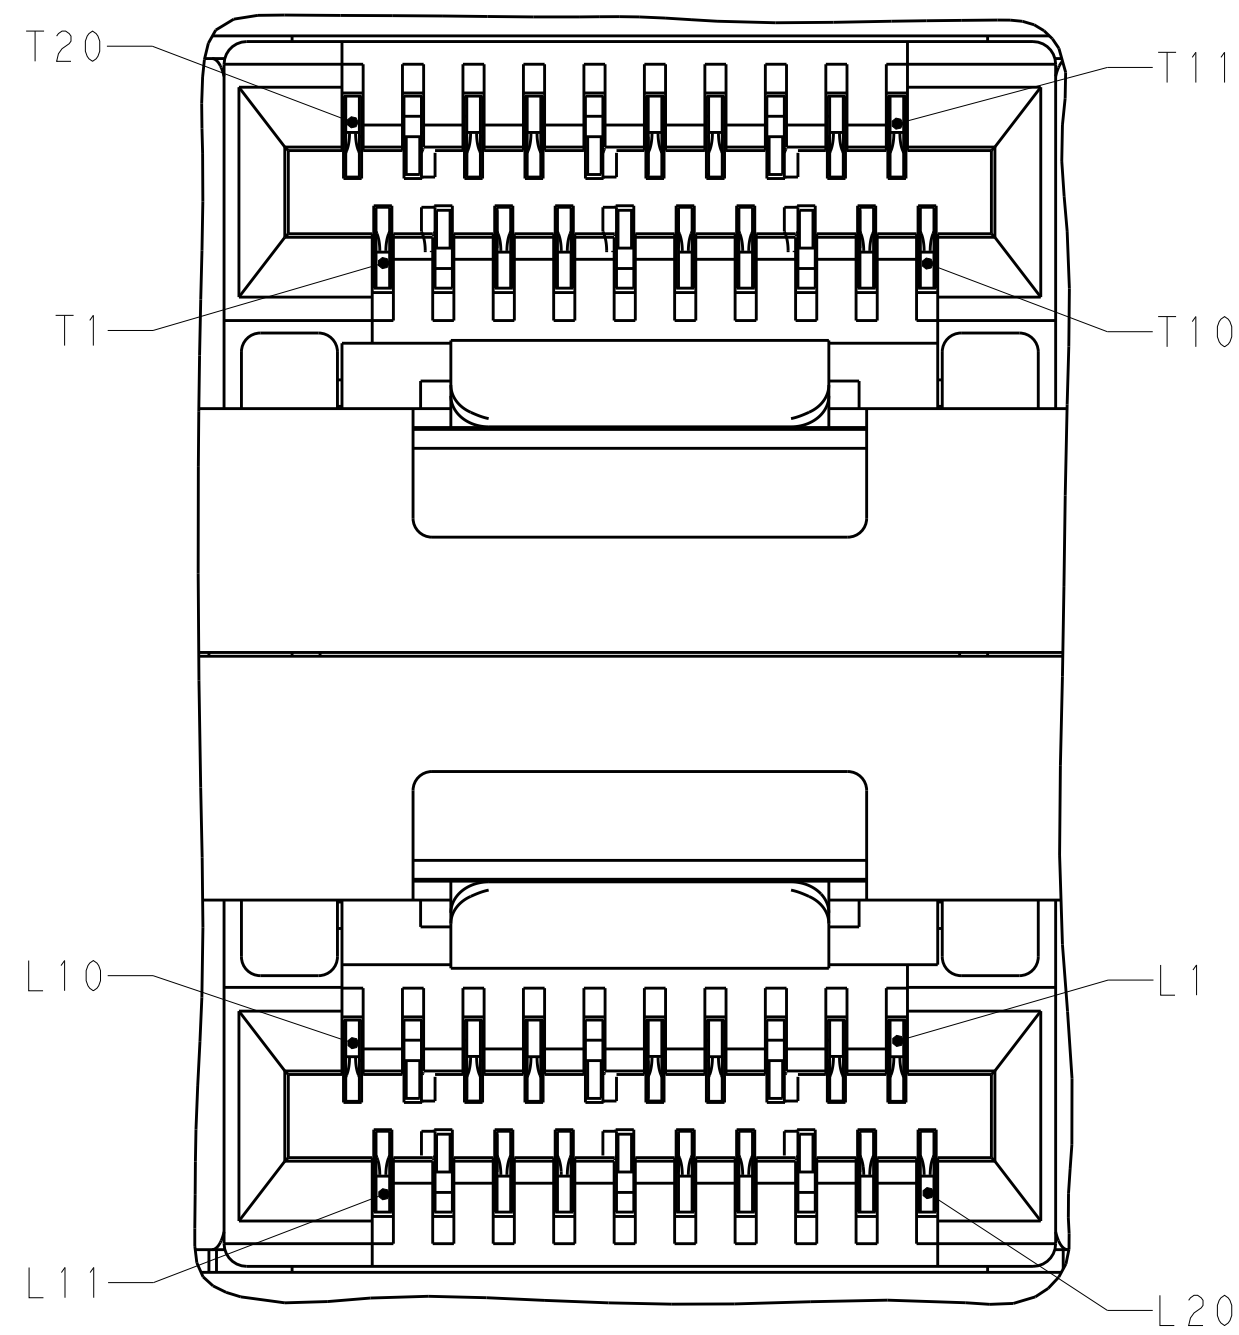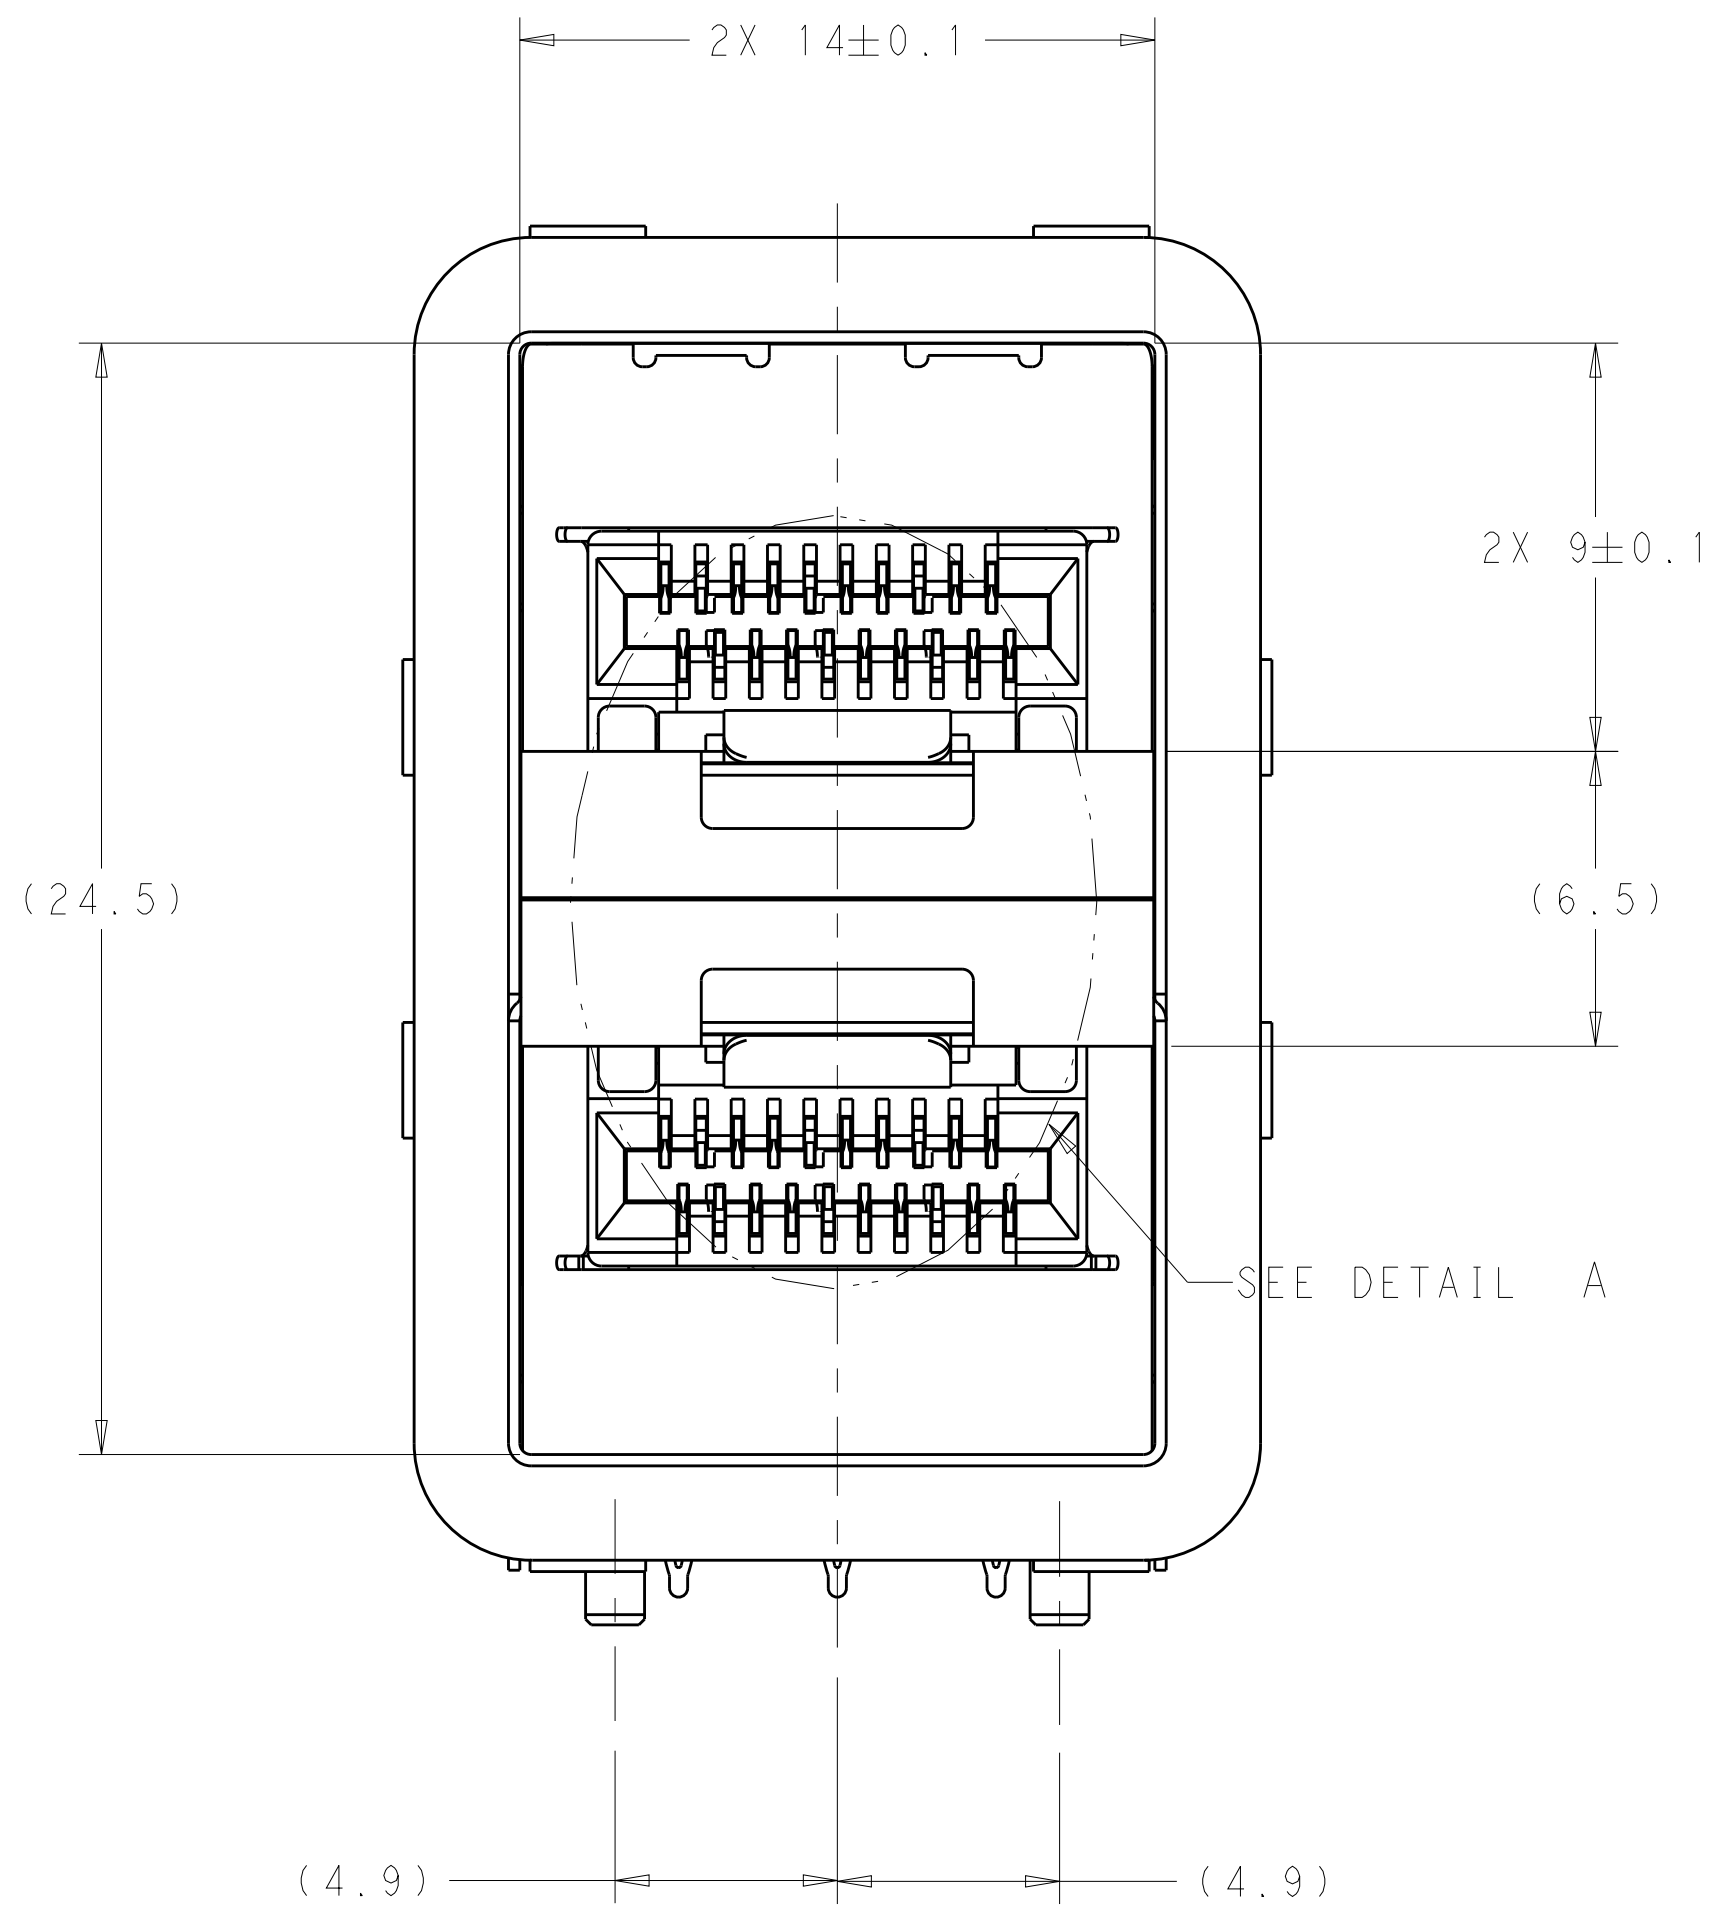


DETAIL A
2 PLACES
SCALE 10:1

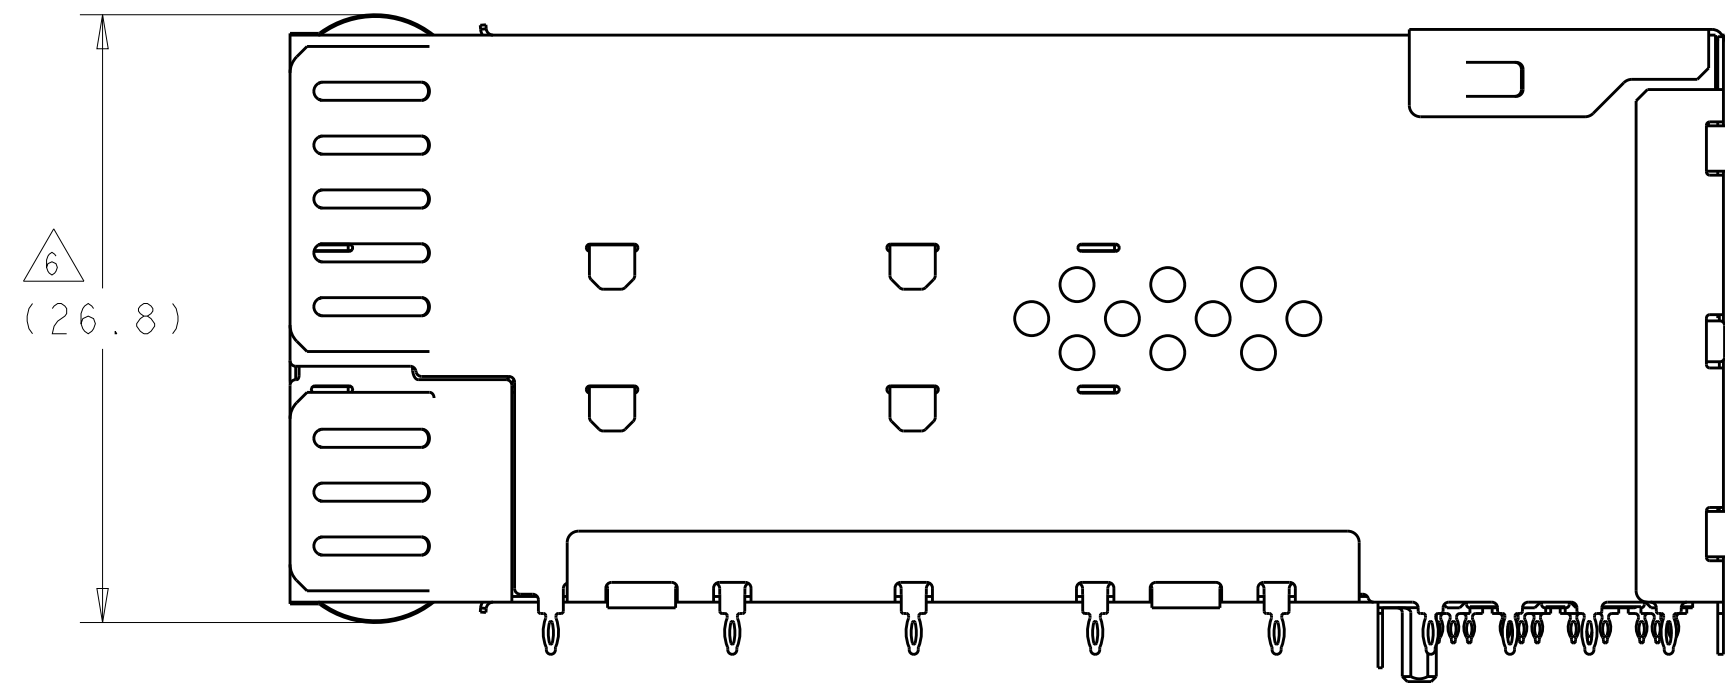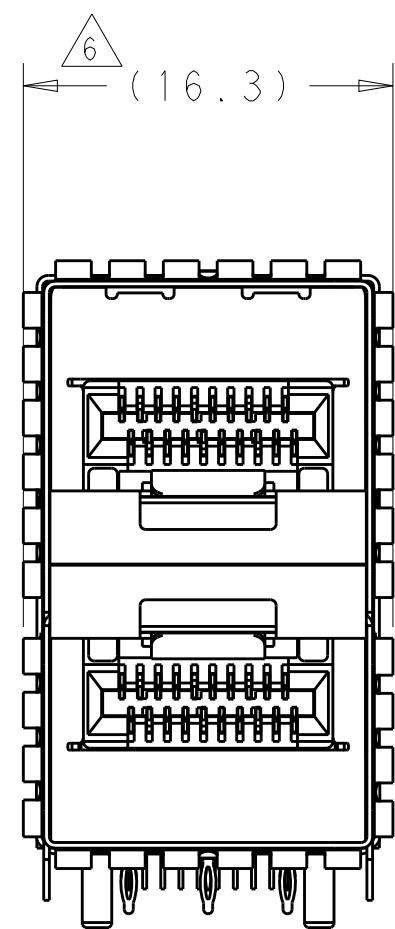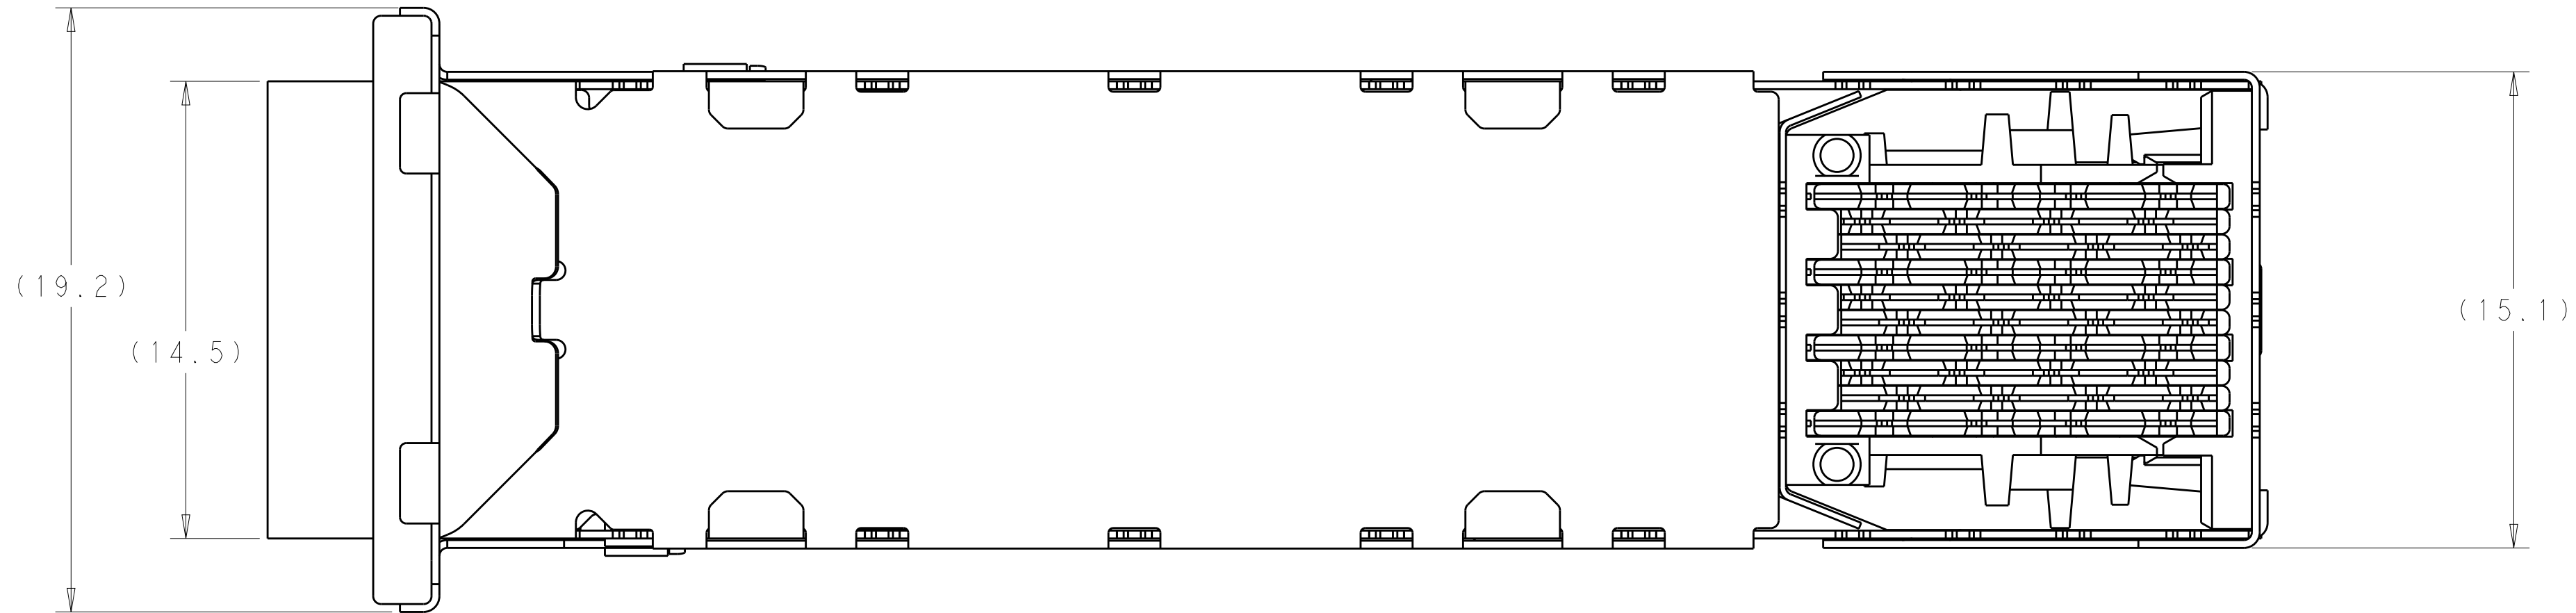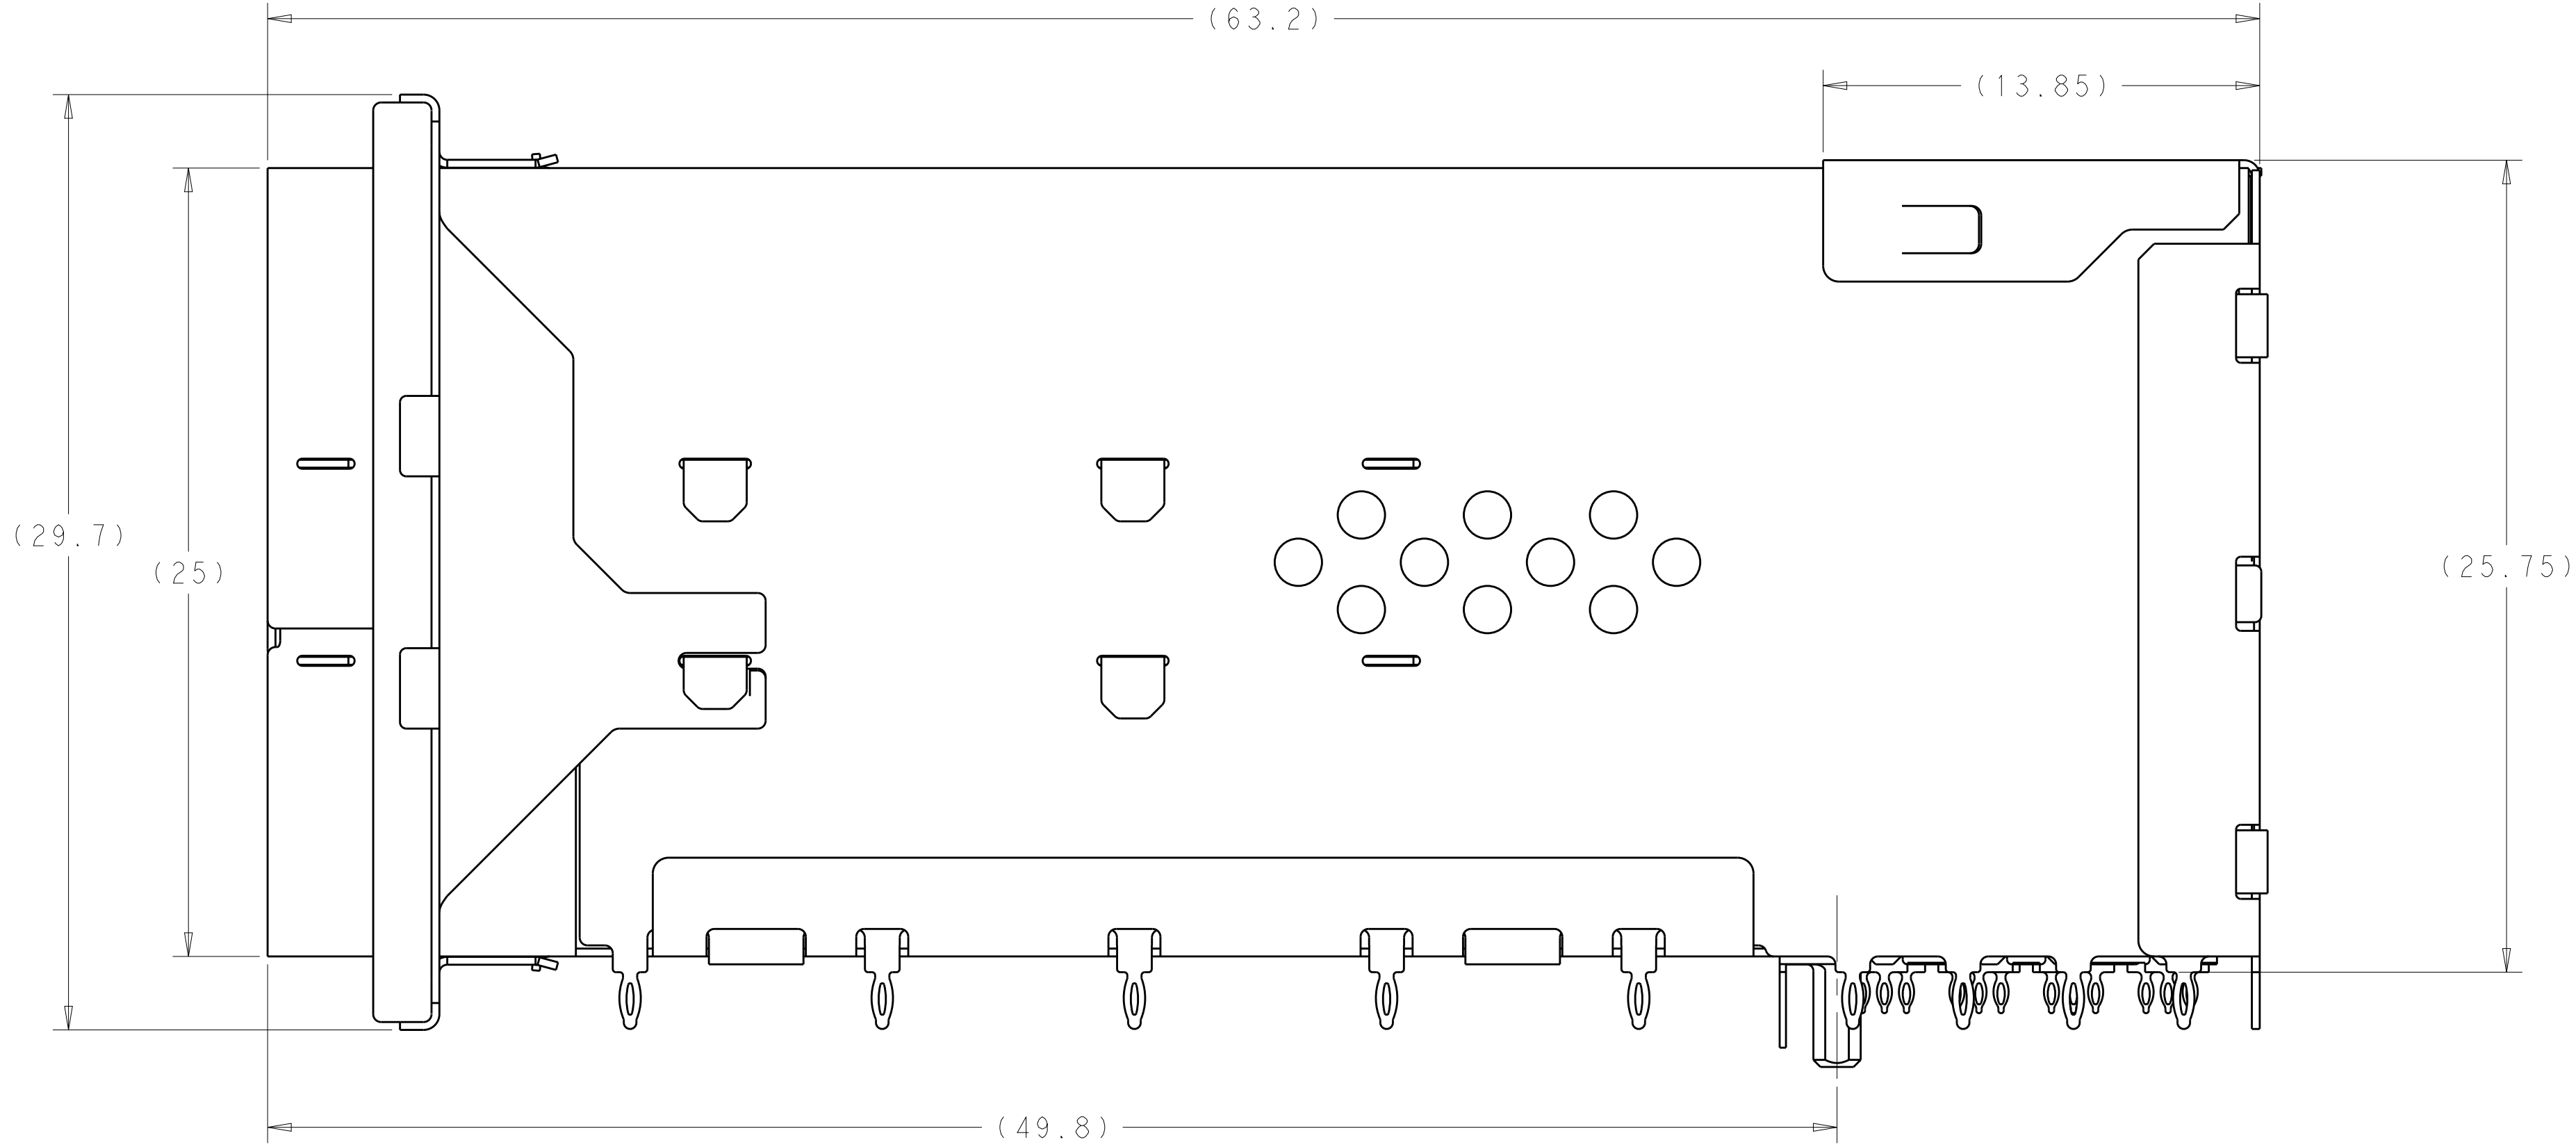


2198318-5 THRU 2198318-8, 1-2198318-9, 2-2198318-0
EMI SPRINGS ONLY
SCALE 3:1

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	17OCT2011		 TE Connectivity										
DIMENSIONS: mm				CHK	18OCT2011												
				M.D. MORRISON				NAME	RECEPTACLE ASSEMBLY, 2X1, STACKED, zSFP+								
				APVD	18OCT2011												
				M.D. MORRISON													
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±				PRODUCT SPEC		SIZE		CASE CODE		DRAWING NO		RESTRICTED TO					
				108-2481													
MATERIAL				APPLICATION SPEC		WEIGHT		A100779		C=2198318		-					
				114-13319													
SEE NOTES				FINISH		Customer Drawing		SCALE		6:1		SHEET		2 of 4		REV B	
				SEE NOTES													

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

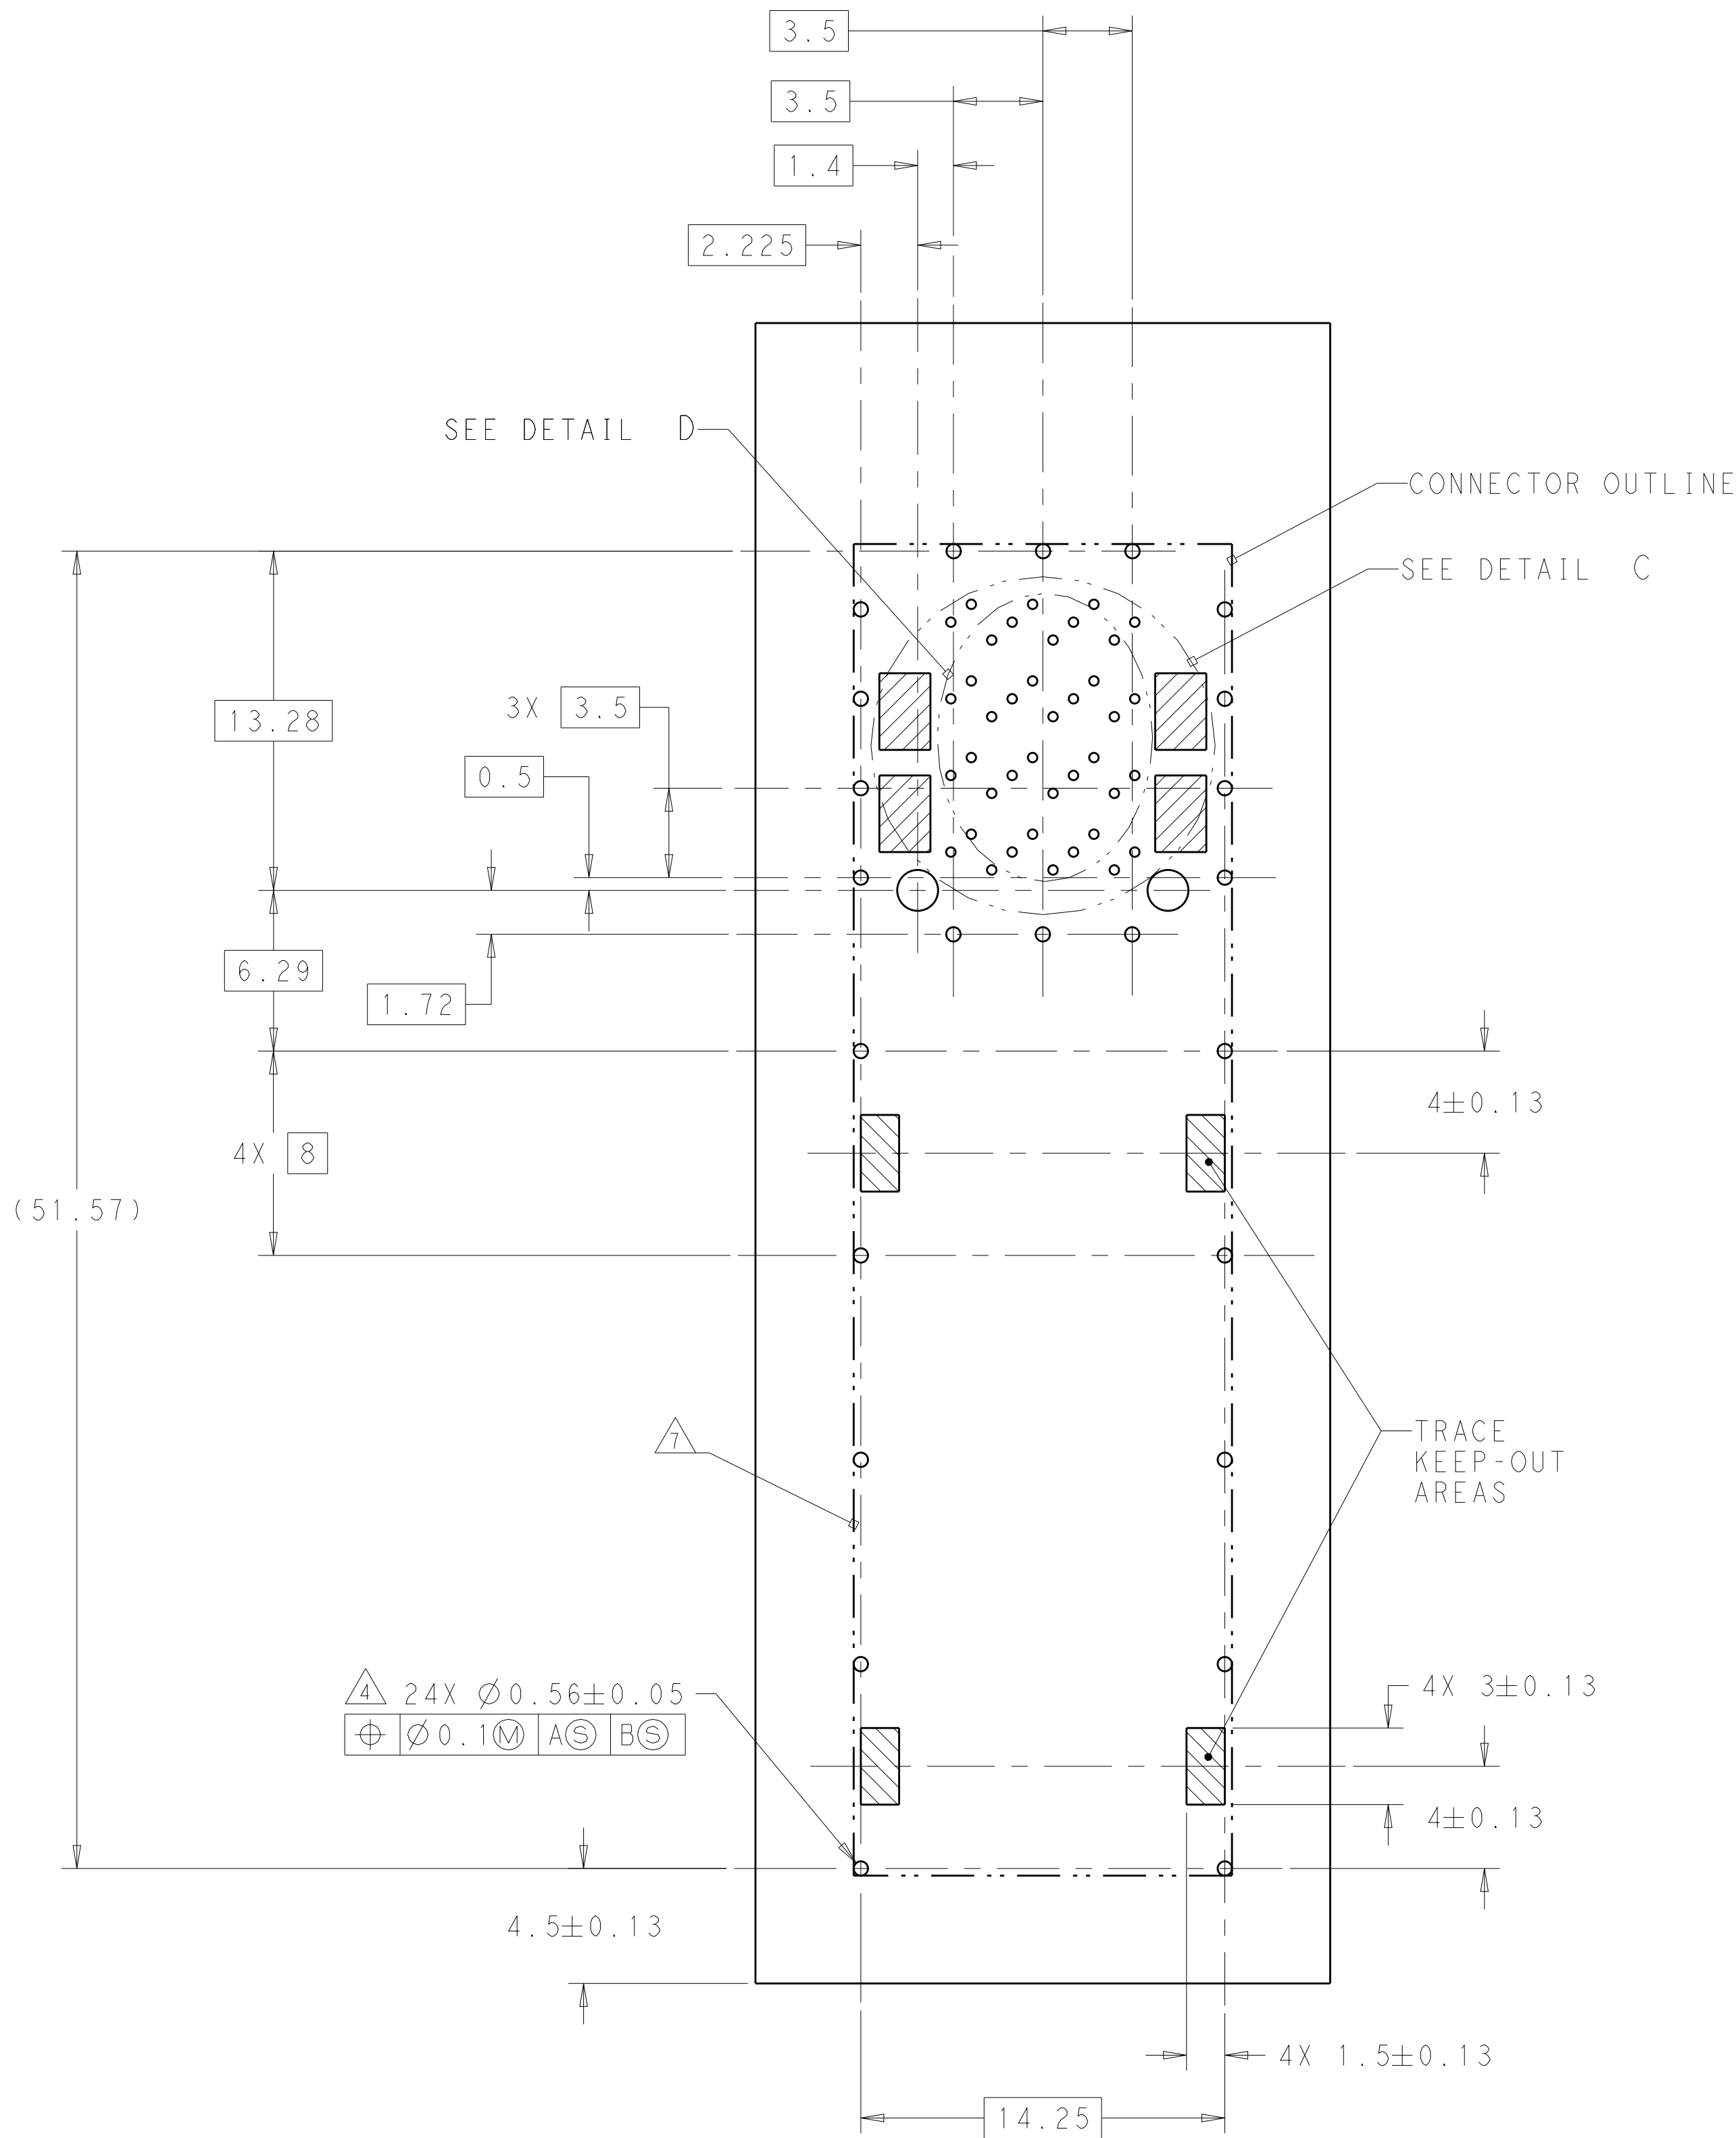

RECOMMENDED PCB LAYOUT
SCALE 5:1

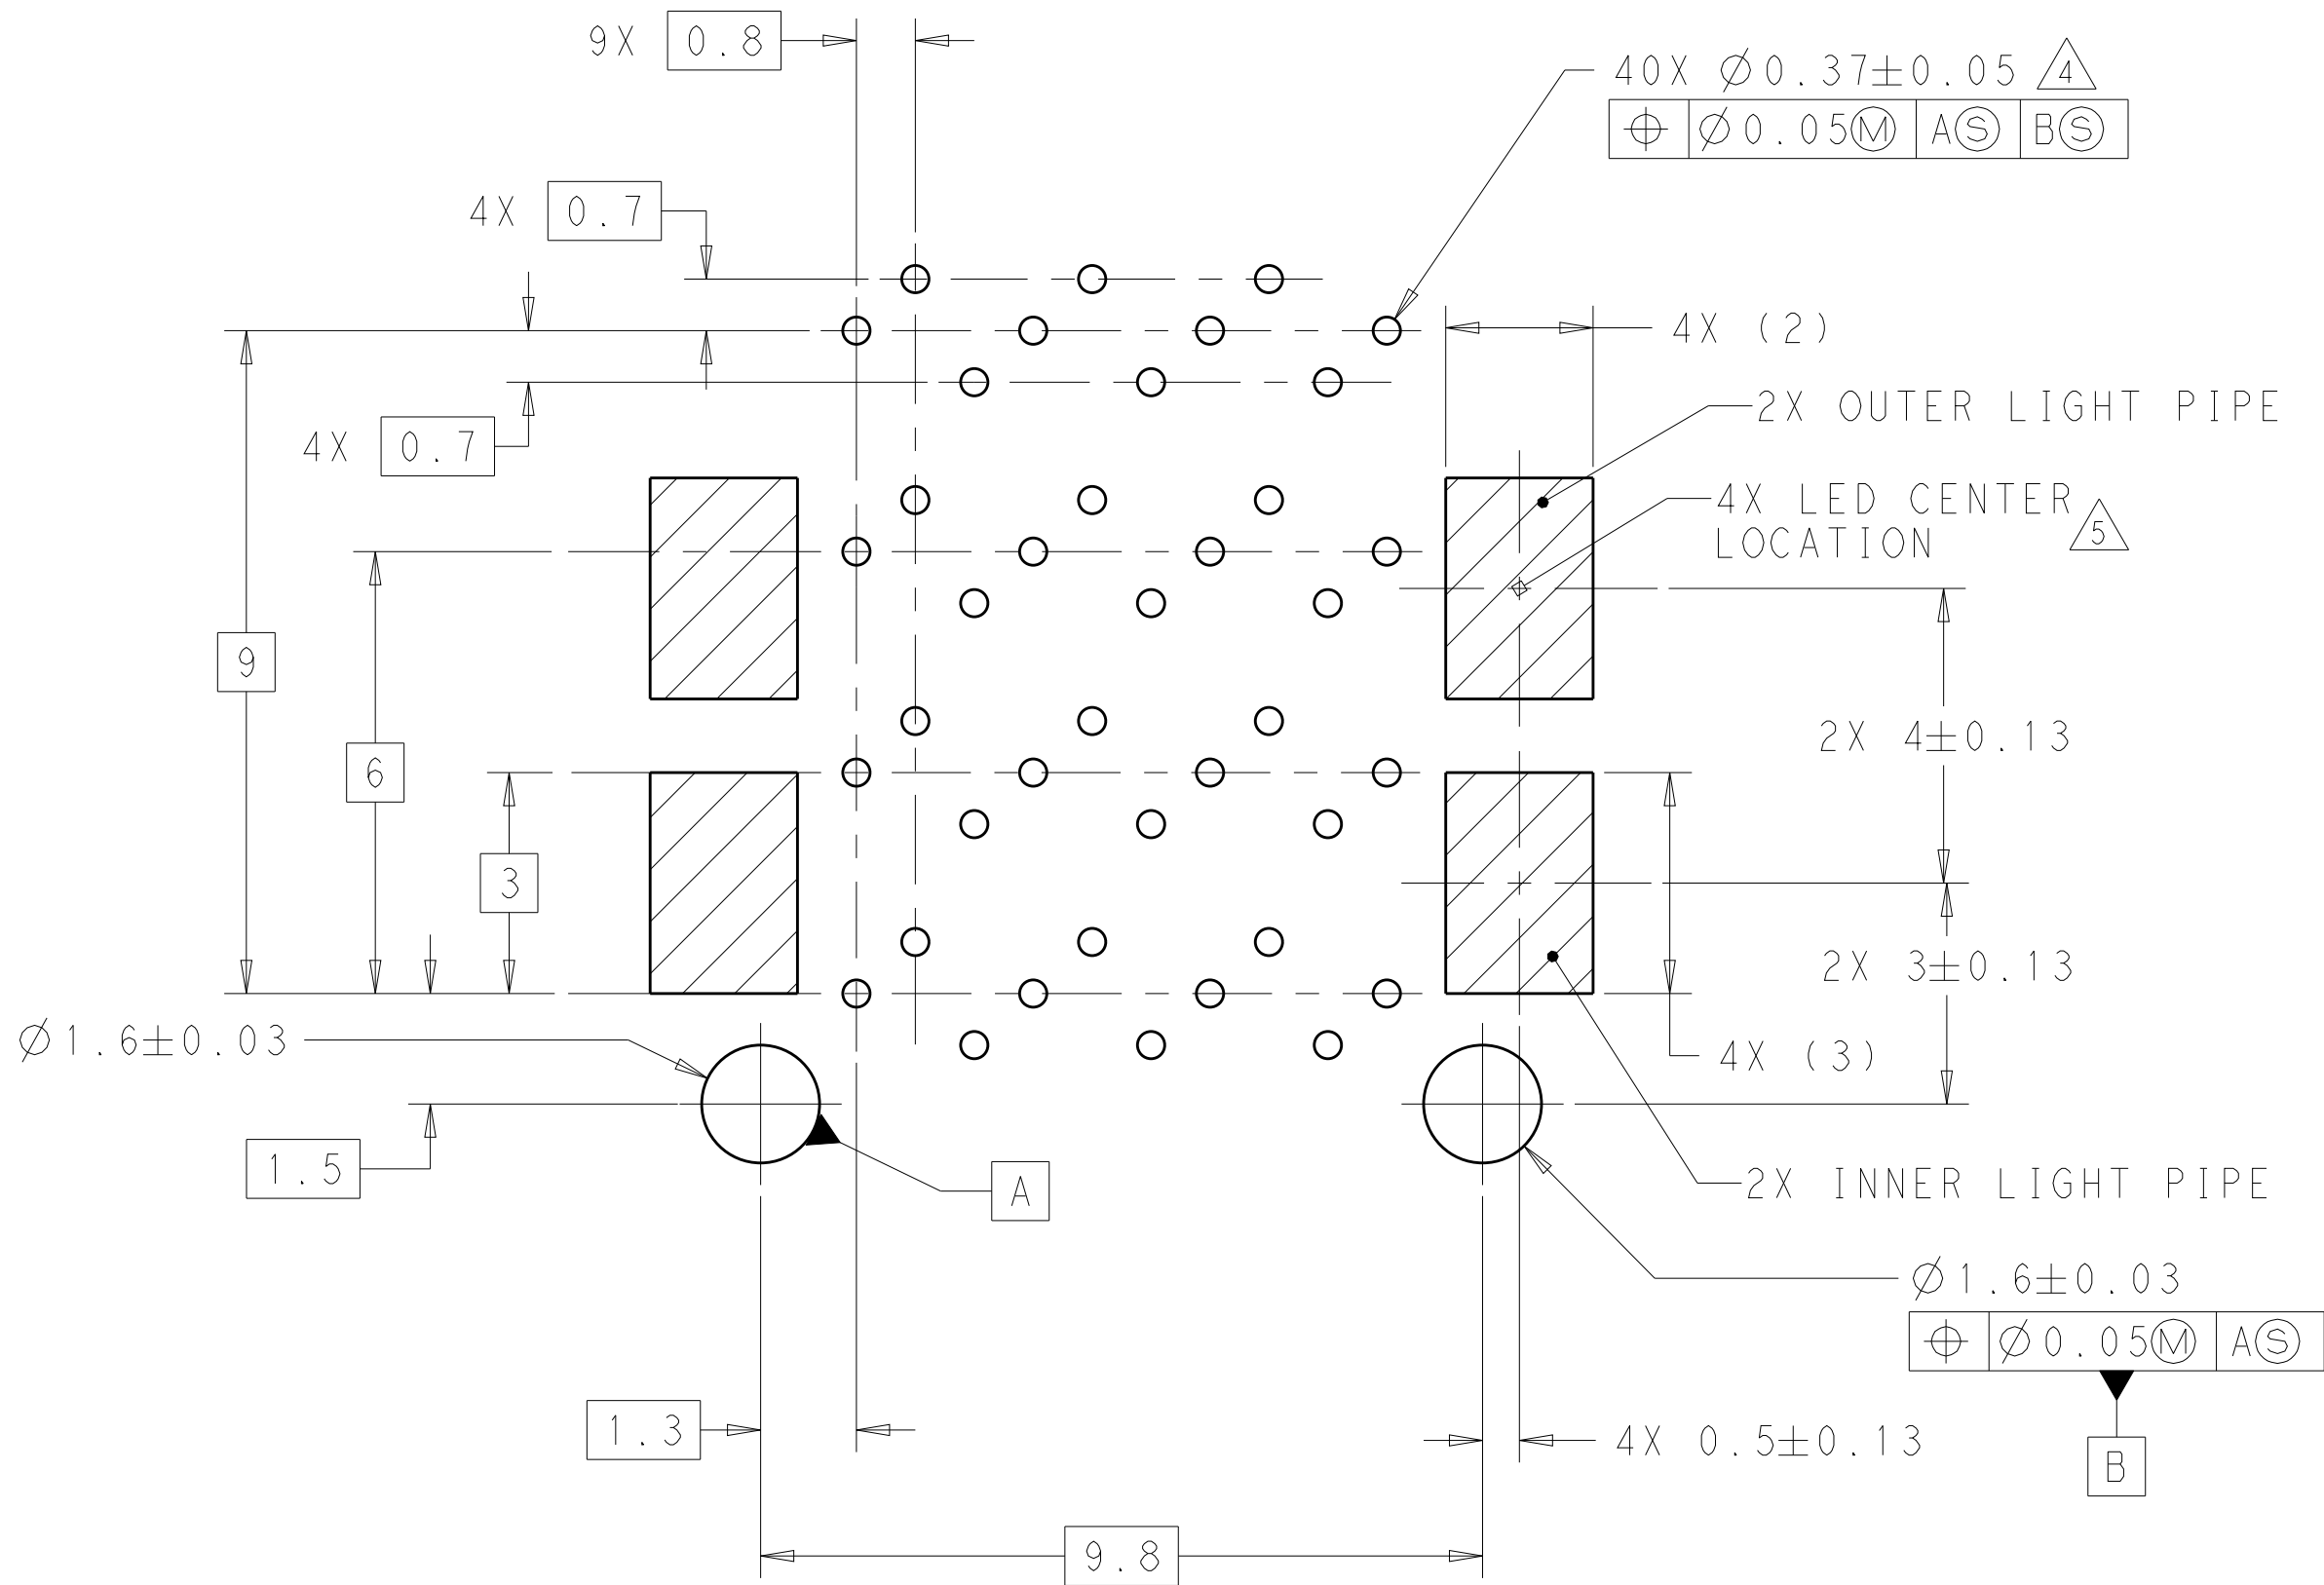

DETAIL C
RECOMMENDED PIN AND LIGHT PIPE LAYOUT
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.E. CONNER	17OCT2011	TE Connectivity	
DIMENSIONS:		CHK M.D. MORRISON	18OCT2011		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.D. MORRISON	18OCT2011	NAME RECEPTACLE ASSEMBLY, 2X1, STACKED, zSFP+	
	0 PLC	±	PRODUCT SPEC	SIZE A100779	
	1 PLC	±	108-2481	CAGE CODE C=2198318	
	2 PLC	±	APPLICATION SPEC	RESTRICTED TO	
	3 PLC	±	114-13319	SHEET 3 OF 4	
MATERIAL SEE NOTES		FINISH SEE NOTES	WEIGHT -	REV B	
		Customer Drawing		SCALE 4:1	

LOC		DIST		REVISIONS					
GP		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-		SEE SHEET 1	-	-	-

T19○ T16○ T13○
T20○ T17○ T14○ T11○
T18○ T15○ T12○


T2○ T5○ T8○
T1○ T4○ T7○ T10○
T3○ T6○ T9○

L9○ L6○ L3○
L10○ L7○ L4○ L1○
L8○ L5○ L2○


L12○ L15○ L18○
L11○ L14○ L17○ L20○
L13○ L16○ L19○

DETAIL D
PIN MAP
SCALE 15:1


PIN MAP LEGEND	
PIN NUMBER	FUNCTION
L1/T1	VEET
L2/T2	TX-FAULT
L3/T3	TX-DISABLE
L4/T4	SDA
L5/T5	SCL
L6/T6	MOD_ABS
L7/T7	RSO
L8/T8	RX_LOS
L9/T9	RS1
L10/T10	VEER
L11/T11	VEER
L12/T12	RD-
L13/T13	RD+
L14/T14	VEER
L15/T15	VCCR
L16/T16	VCCT
L17/T17	VEET
L18/T18	TD+
L19/T19	TD-
L20/T20	VEET

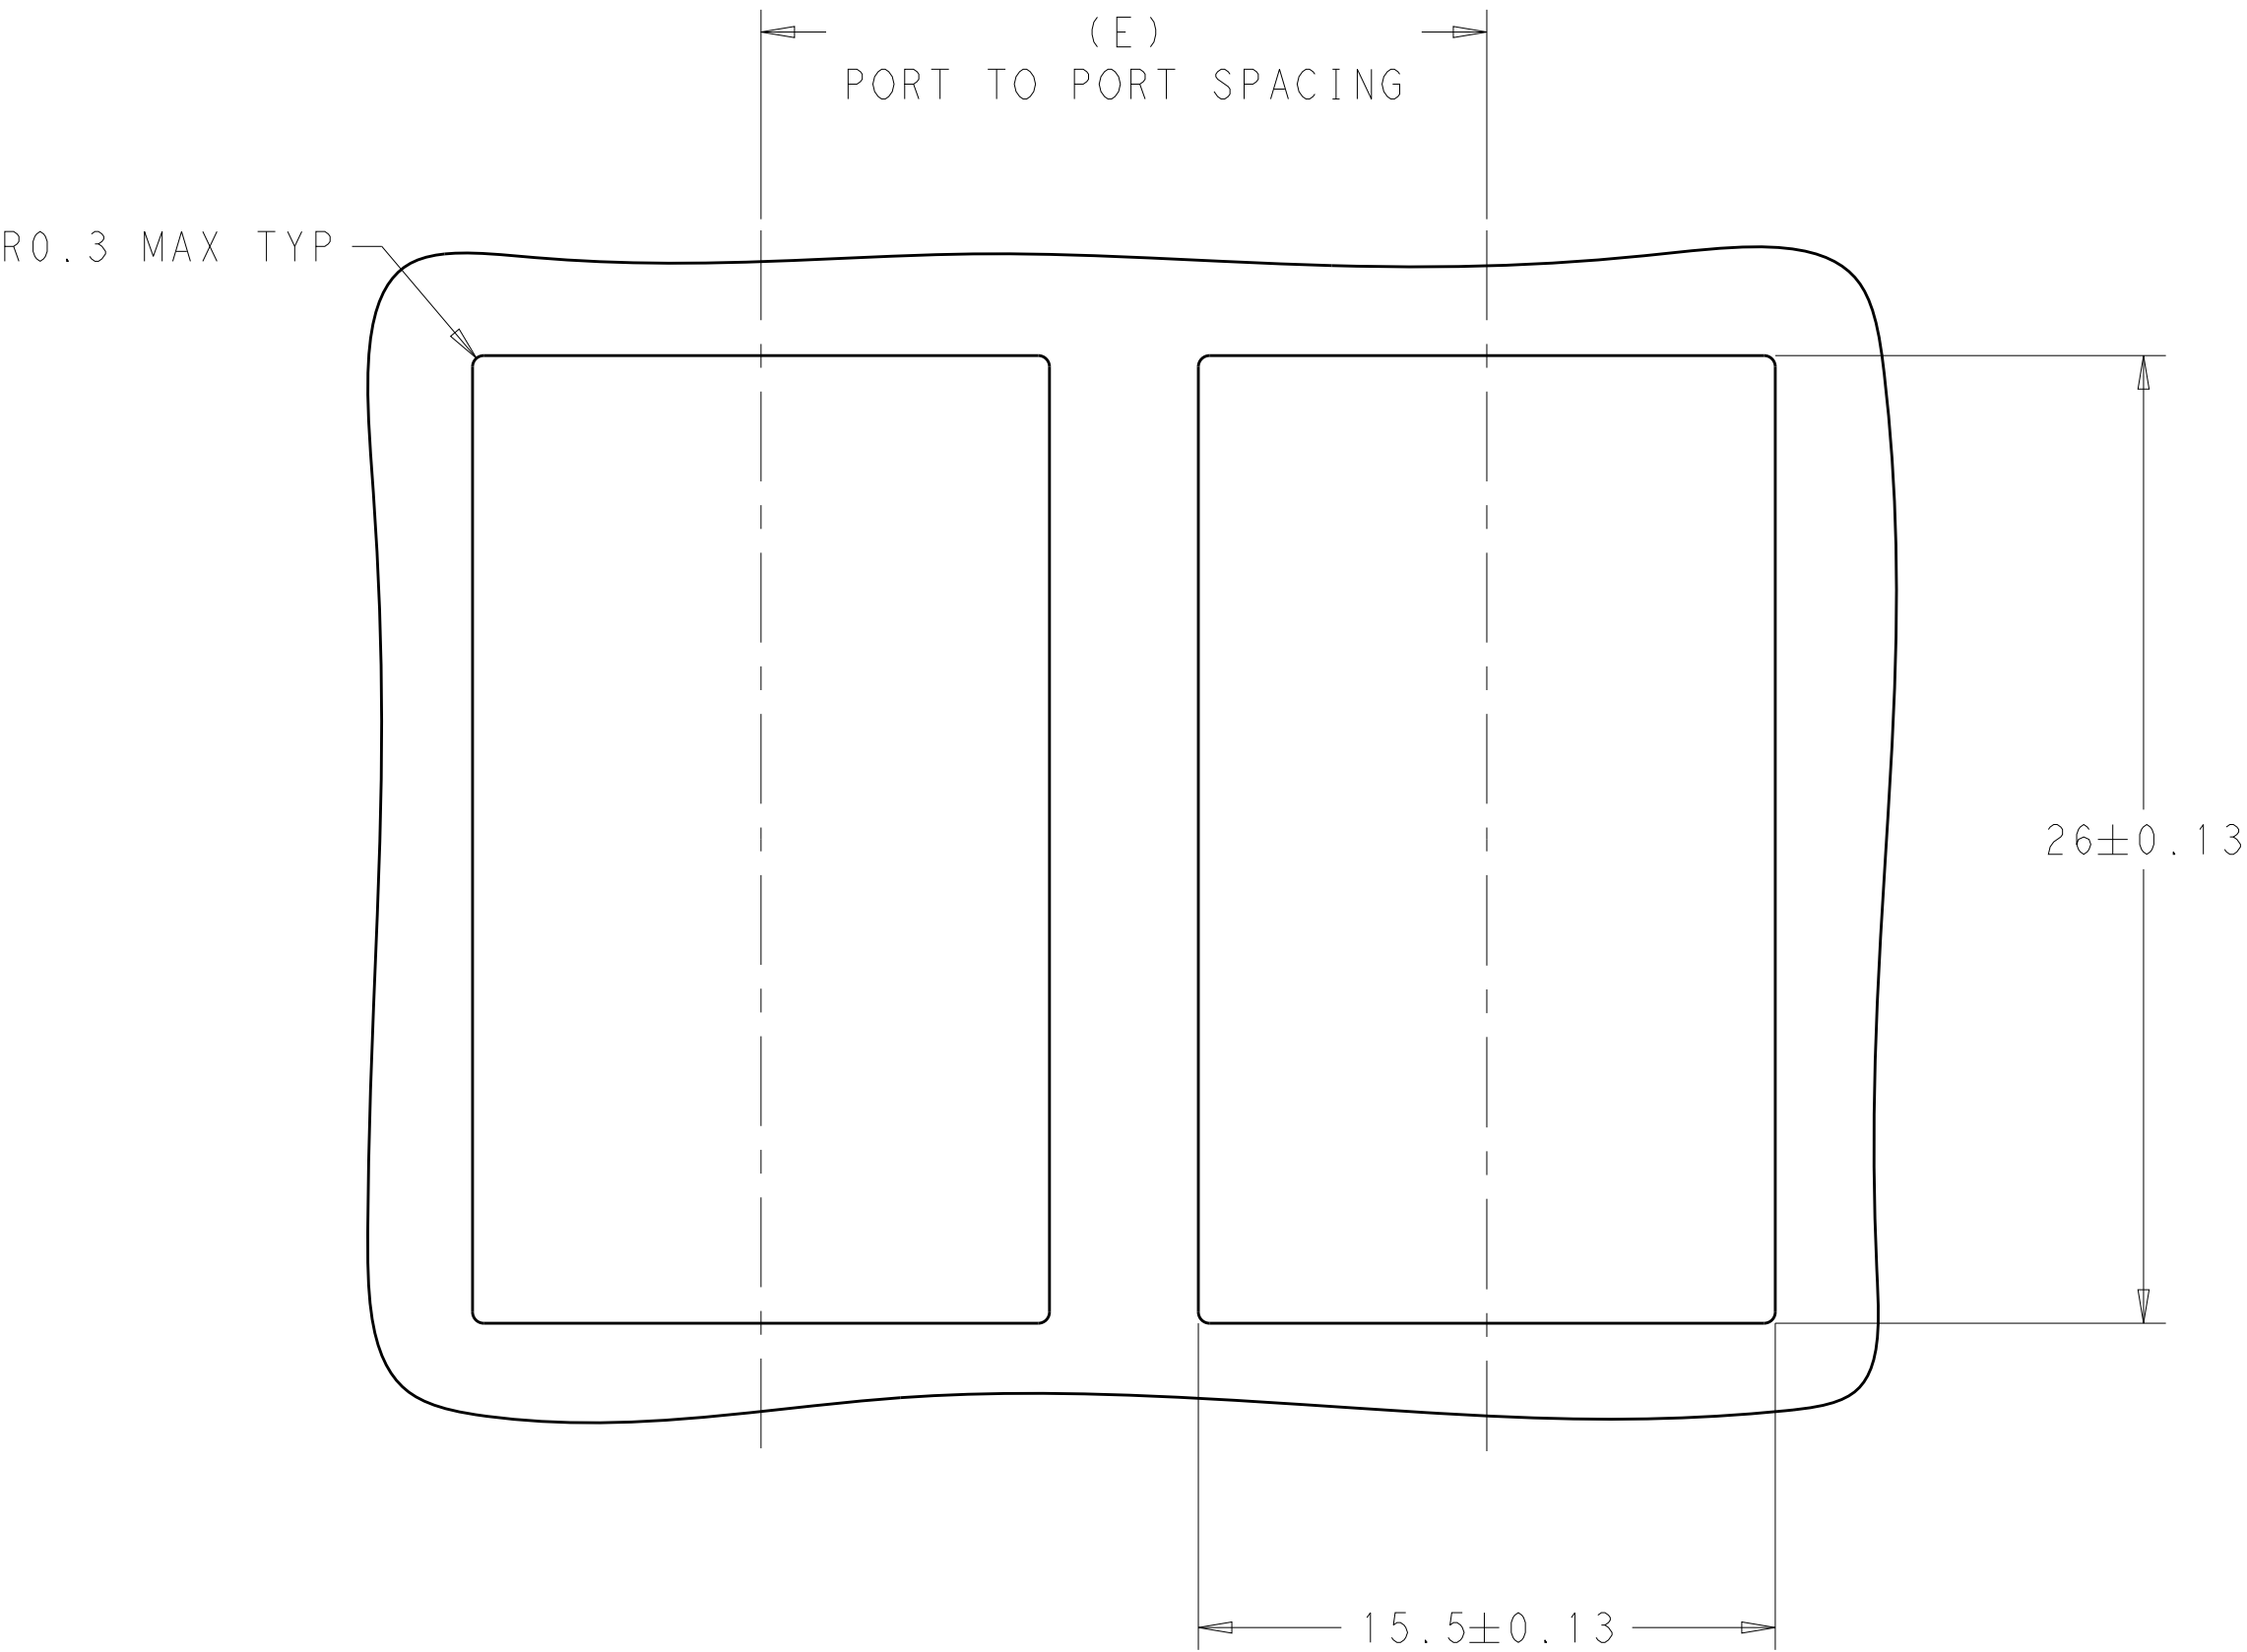

RECOMMENDED BEZEL CUT-OUT DETAIL
SCALE 5:1

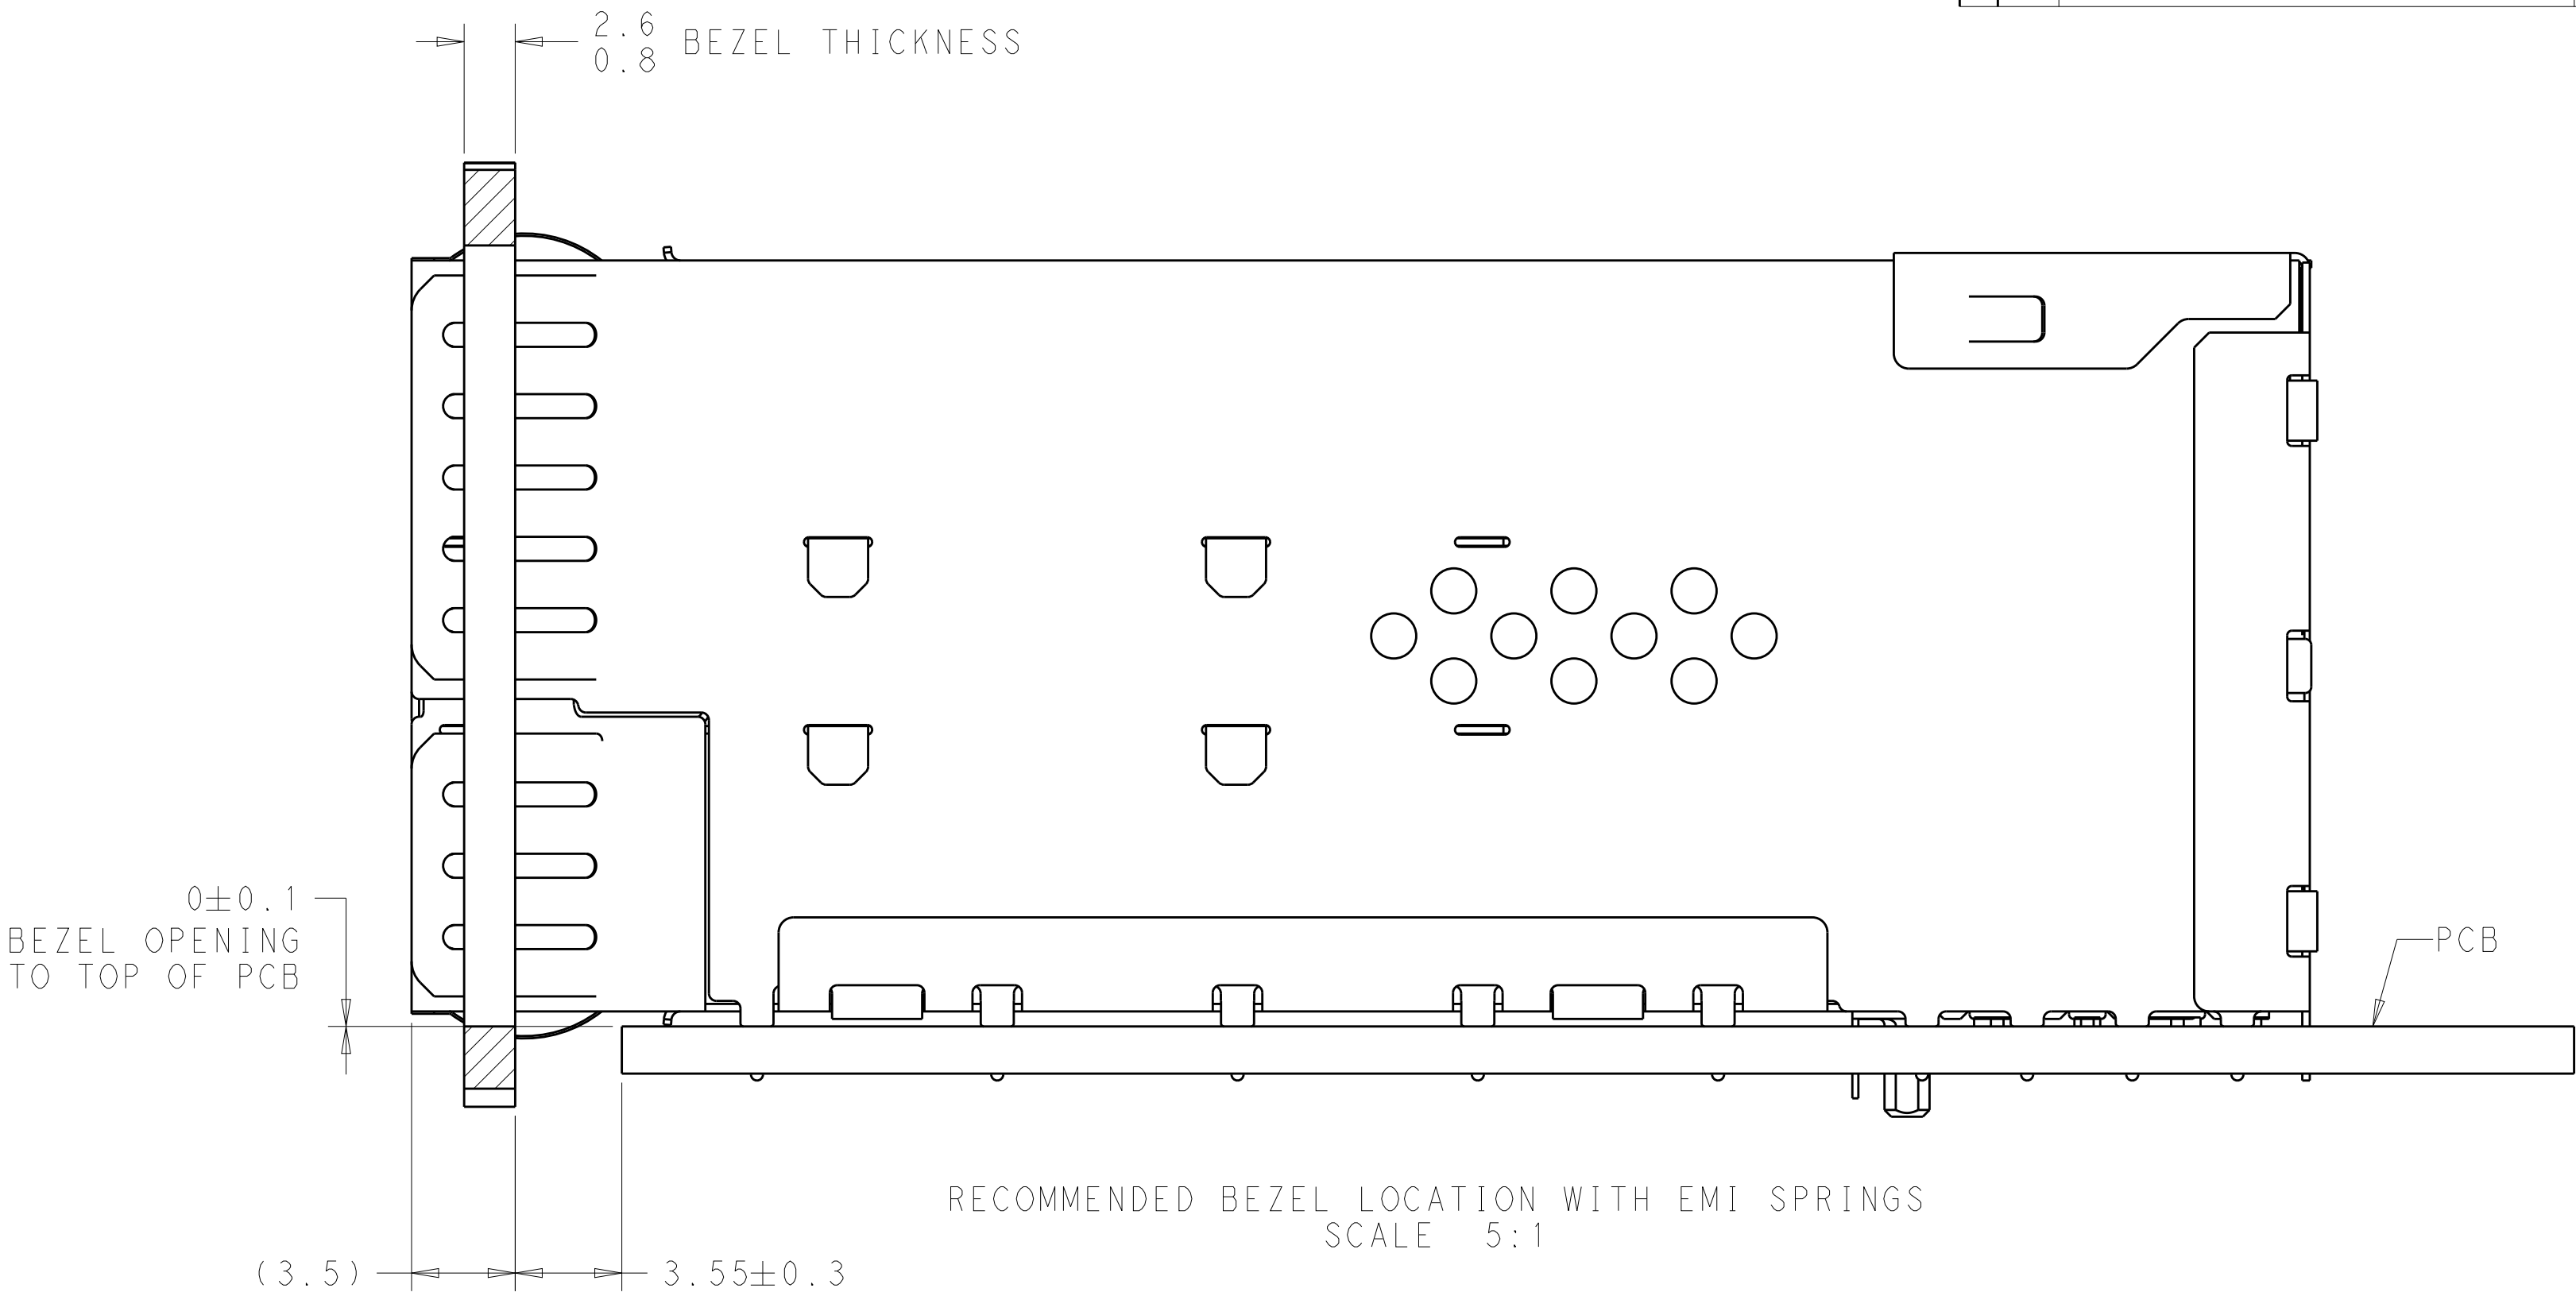

RECOMMENDED BEZEL LOCATION WITH EMI SPRINGS
SCALE 5:1

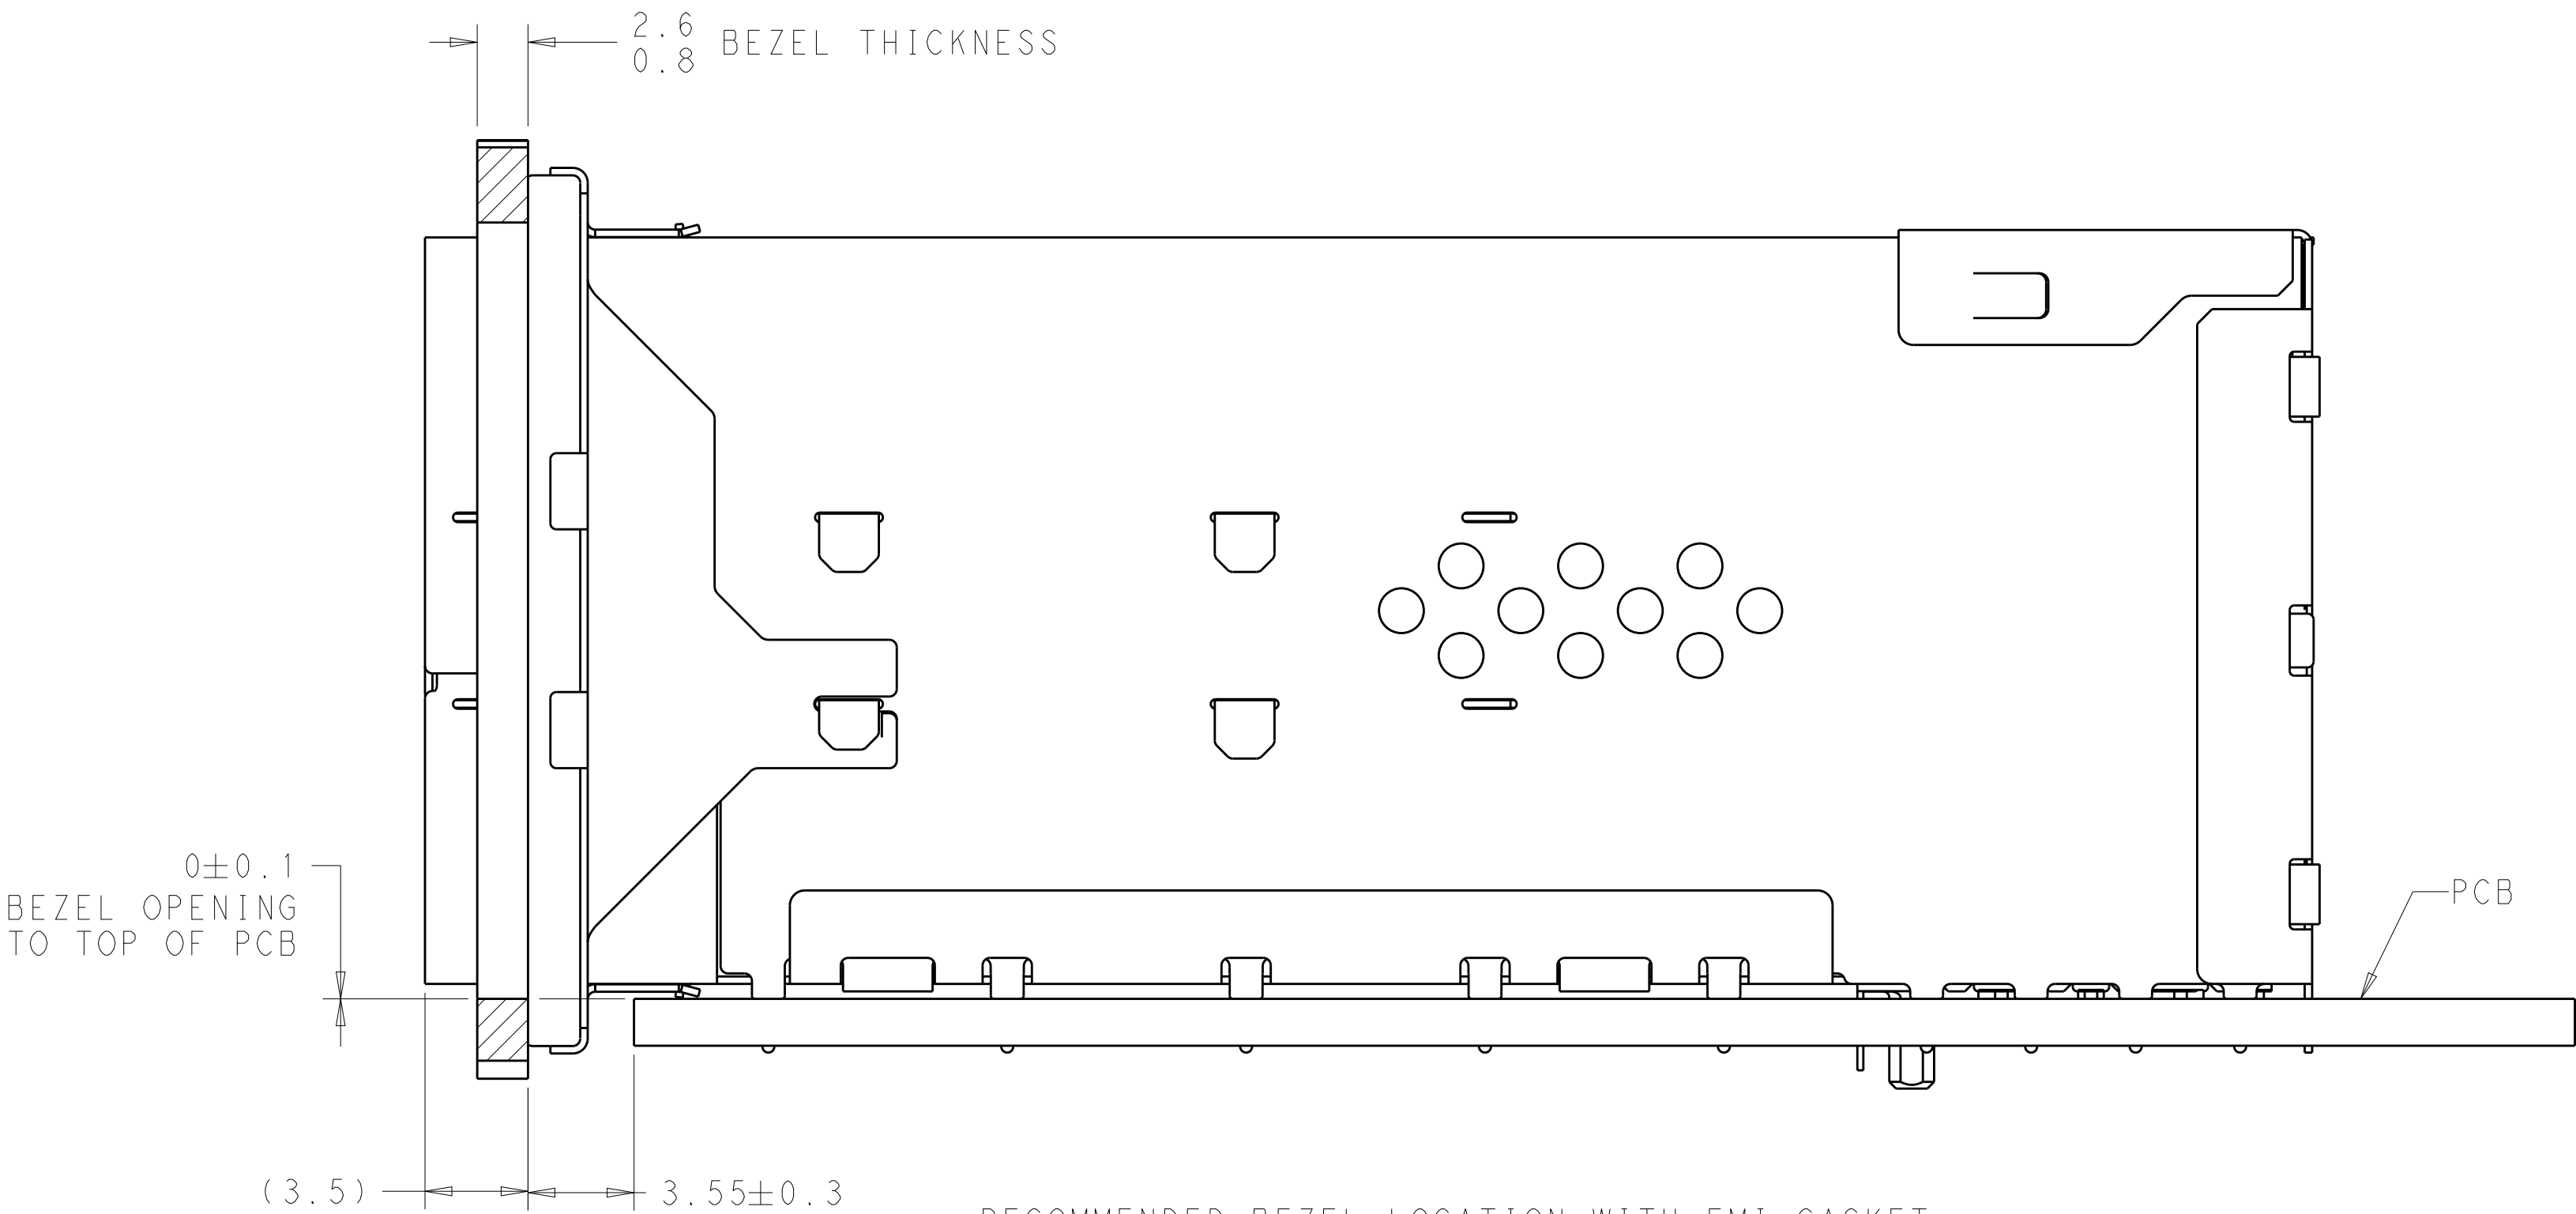

RECOMMENDED BEZEL LOCATION WITH EMI GASKET
SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN M.E. COWHER	17OCT2011	 TE Connectivity		
DIMENSIONS:			CHK M.D. MORRISON	18OCT2011			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M.D. MORRISON	18OCT2011	NAME	RECEPTACLE ASSEMBLY, 2X1, STACKED, zSFP+	
	0 PLC	±"	PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO
	1 PLC	±"	108-2481		RESTRICTED TO		
	2 PLC	±"	APPLICATION SPEC		-		
	3 PLC	±"	114-13319		A100779C=2198318		
MATERIAL	SEE NOTES	FINISH	SEE NOTES	WEIGHT	-		
Customer Drawing				SCALE	4:1	SHEET	4 OF 4
				REV	B		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.