

High Temperature (230 °C) High Precision Thin Film Wraparound Chip Resistor Arrays



PRAHT arrays can be used in most applications requiring a matched pair (or set) of resistor elements at very high temperature up to 230 °C. The networks provide 2 ppm/°C TCR tracking, a ratio tolerance as tight as 0.05 % and outstanding stability. They are available in 1 mm, 1.35 mm, and 1.82 mm pitch.

FEATURES

- Tight TCR (10 ppm/°C) and TCR tracking (to 2 ppm/°C)
- 2 to 4 resistors (same or different values)
- Ratio tolerance to 0.05 %
- Gold terminations for temperature up to 230 °C
- High temperature (230 °C)
- SnAg terminations for temperature up to 200 °C
- SMD wraparound chip resistor array
- Thin film technology
- Very low noise < - 35 dB and voltage coefficient < 0.01 ppm/V
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912




TYPICAL PERFORMANCE


	ABSOLUTE	TRACKING
TCR	10 ppm/°C	2 ppm/°C
	ABSOLUTE	RATIO
TOL.	0.5 %	0.05 %

DIMENSIONS


Independent resistors

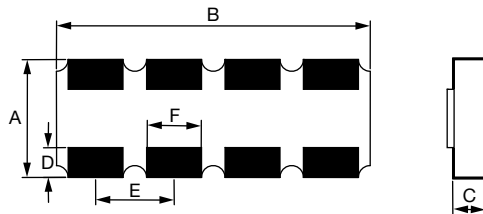


One common point

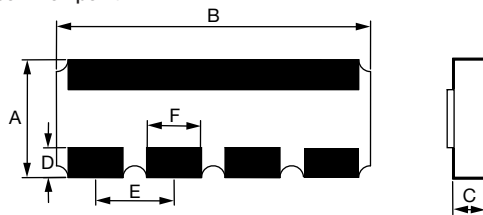

Suggested land pattern (according to IPC-7351A)

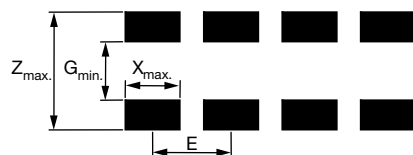

DIM.	PRAHT 100		PRAHT 135		PRAHT 182	
	mm	mil	mm	mil	mm	mil
A	1.52 ± 0.152	60 ± 6	1.91 ± 0.152	75 ± 6	3.06 ± 0.152	120 ± 6
B	B = N x E (± 0.2 mm) B = N x E (± 8 mil)					
C	0.5 ± 0.127	20 ± 5	0.5 ± 0.127	20 ± 5	0.5 ± 0.127	20 ± 5
D	0.38 ± 0.13	15 ± 5	0.38 ± 0.13	15 ± 5	0.40 ± 0.13	16 ± 5
E	1	40	1.35	53	1.825	72
F	0.7 ± 0.1	27.6 ± 4	1.05 ± 0.1	41.4 ± 4	1.525 ± 0.1	60 ± 4
G _{min.}	0.49	19.3	0.88	34.5	1.99	78.3
X _{max.}	0.66	26	1.01	39.8	1.49	58.7
Z _{max.}	2.57	101.2	2.96	116.5	4.11	161.8

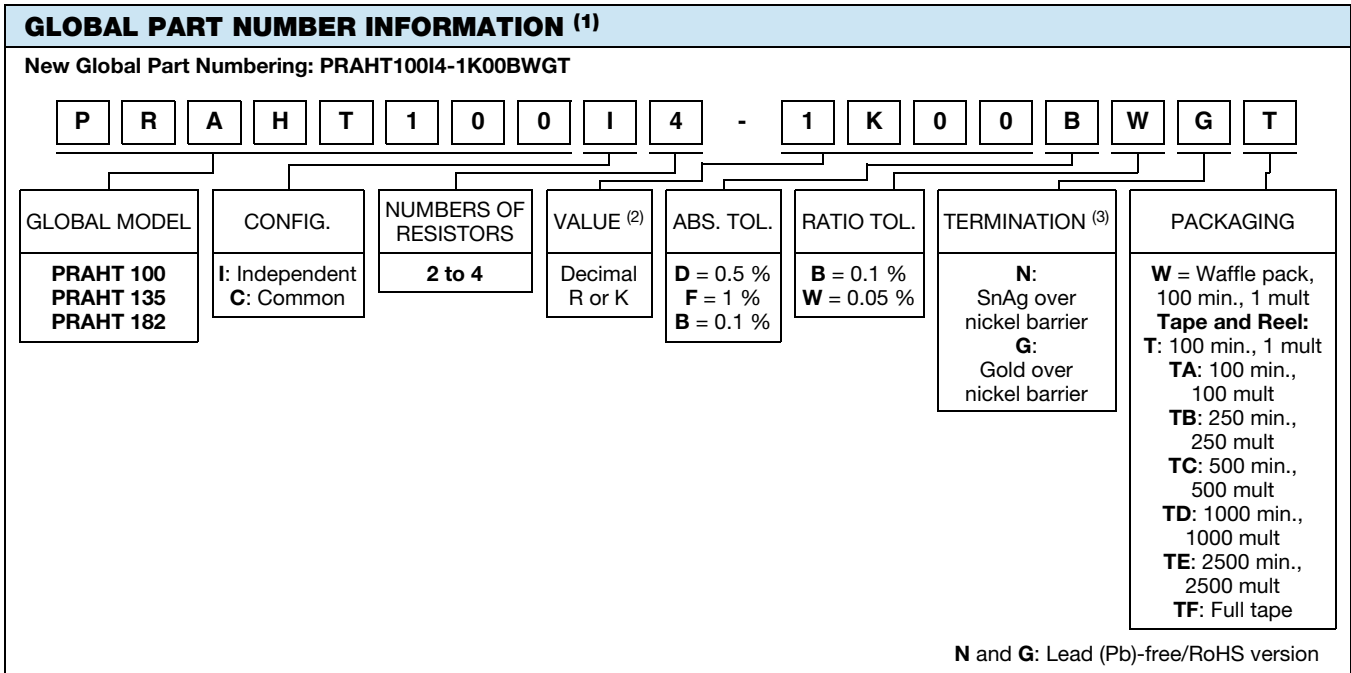

Notes

- (1) Part number can only have 18 digits. Depending on information needed a compromise has to be found. A codification can be used to identify case size + configuration and number of resistors. See table below.
E.g. PRAHT100I4-4K75BWGT (Part number has more than 18 digits): PRAHT100I4 must be replaced by PRAHT17 = PRAHT17-4K75BWGT
- (2) When the last digit(s) of the ohmic value is (are) 0, it (they) can be omitted.
E.g.: PRAHT100I4-2K20BWGT → can be ordered under PRAHT100I4-2K2BWGT
PRAHT100I4-1K00BWGT → can be ordered under PRAHT100I4-1KBWGT
- (3) N termination for temperature up to 200 °C.
G termination for temperature up to 230 °C.

CODIFICATION OF SIZE + CONFIGURATION + NUMBER OF RESISTORS									
CODE 18	CODE 40	CODE 18	CODE 40	CODE 18	CODE 40	CODE 18	CODE 40	CODE 18	CODE 40
1	PRAHT073I2	15	PRAHT100I2	29	PRAHT182I2	43	PRAHT074C2	57	PRAHT135C2
2	PRAHT073I3	16	PRAHT100I3	30	PRAHT182I3	44	PRAHT074C3	58	PRAHT135C3
3	PRAHT073I4	17	PRAHT100I4	31	PRAHT182I4	45	PRAHT074C4	59	PRAHT135C4
4	PRAHT073I5	18	PRAHT100I5	32	PRAHT182I5	46	PRAHT074C5	60	PRAHT135C5
5	PRAHT073I6	19	PRAHT100I6	33	PRAHT182I6	47	PRAHT074C6	61	PRAHT135C6
6	PRAHT073I7	20	PRAHT100I7	34	PRAHT182I7	48	PRAHT074C7	62	PRAHT135C7
7	PRAHT073I8	21	PRAHT100I8	35	PRAHT182I8	49	PRAHT074C8	63	PRAHT135C8
8	PRAHT074I2	22	PRAHT135I2	36	PRAHT073C2	50	PRAHT100C2	64	PRAHT182C2
9	PRAHT074I3	23	PRAHT135I3	37	PRAHT073C3	51	PRAHT100C3	65	PRAHT182C3
10	PRAHT074I4	24	PRAHT135I4	38	PRAHT073C4	52	PRAHT100C4	66	PRAHT182C4
11	PRAHT074I5	25	PRAHT135I5	39	PRAHT073C5	53	PRAHT100C5	67	PRAHT182C5
12	PRAHT074I6	26	PRAHT135I6	40	PRAHT073C6	54	PRAHT100C6	68	PRAHT182C6
13	PRAHT074I7	27	PRAHT135I7	41	PRAHT073C7	55	PRAHT100C7	69	PRAHT182C7
14	PRAHT074I8	28	PRAHT135I8	42	PRAHT073C8	56	PRAHT100C8	70	PRAHT182C8

STANDARD ELECTRICAL SPECIFICATIONS							
MODEL	SIZE	RESISTANCE RANGE Ω	POWER RATING PER RESISTOR (4) W	ABSOLUTE TOLERANCE ± %	RATIO TOLERANCE %	ABSOLUTE TCR (5) ± ppm/°C	RATIO TCR (5) ± ppm/°C
PRAHT 100	100	10 to 250K	0.010	0.1, 0.5, 1	0.05, 0.1	15	2
PRAHT 135	135	10 to 500K	0.0125	0.1, 0.5, 1	0.05, 0.1	15	2
PRAHT 182	182	10 to 2M	0.020	0.1, 0.5, 1	0.05, 0.1	15	2

Notes

- (4) At + 215 °C
- (5) At - 40 °C to + 215 °C



CLIMATIC SPECIFICATIONS	
Operating temperature range	- 55 °C to + 215 °C
Storage temperature range	- 55 °C to + 230 °C

PERFORMANCES		
TEST	SPECIFICATIONS	
Noise	≤ - 35 dB	
Voltage coefficient	≤ 0.01 ppm/V	
Limiting voltage	PRAHT 100	50 V
	PRAHT 135	100 V
	PRAHT 182	150 V

MECHANICAL SPECIFICATIONS	
Substrate	Alumina
Technology	Thin Film
Film	Nickel chromium with mineral passivation
Terminations (1)	N type: SnAg over nickel barrier
	G type: Gold over nickel barrier

Note
 (1) N terminations for temperatures up to 200°C.
 G terminations for temperatures up to 230°C.

PACKAGING

Several types of packaging are available: Waffle-pack and tape and reel.

SIZE	MOQ	NUMBER OF PIECES PER PACKAGE		
		WAFFLE PACK MAX. QUANTITY PER BOX	TAPE AND REEL	
			MIN.	MAX.
PRA100 x 2	100	100	100	4000
PRA100 x 3		140		
PRA100 x 4		60		
PRA135 x 2		140	100	4000
PRA135 x 3		60		
PRA135 x 4		60		
PRA182 x 2		60	100	4000
PRA182 x 2		60		
PRA182 x 2		50		

PACKAGING RULES

Waffle Pack

Can be filled up to maximum quantity indicated in the table here above, taking into account the minimum order quantity. When quantity ordered exceeds maximum quantity of a single waffle pack, the waffle packs are stacked up on the top of each other and closed by one single cover.


To get “not stacked up” waffle pack in case of ordered quantity > maximum number of pieces per package: Please consult Vishay Sfernice for specific ordering code.

Tape and Reel

Can be filled up to maximum quantity indicated in the table here above, taking into account the minimum order quantity. When quantity ordered is between the MOQ and the maximum reel capacity, only one reel is provided.

When several reels are needed for ordered quantity within MOQ and maximum reel capacity: Please consult Vishay Sfernice for specific ordering code.


DERATING

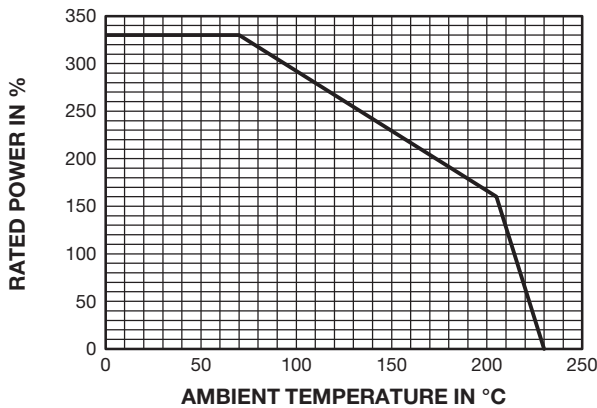

MARKING

On the primary package, printed information includes Vishay S.A. trademark series and model, schematic number of resistors, ohmic value, absolute tolerance, ratio tolerance, type of termination: B tinned over nickel barrier.

Marking on parts:



E.g.: Ohmic value 13K:
 Coded 1302: M = 1, C = 3, D = 0, U = 2



PERFORMANCE			
TESTS	CONDITIONS CECC REQUIREMENTS	DRIFTS	
		ABSOLUTE PER (Typical Values)	RATIO
Overload	2.5 Un/2 s	0.05 % Rn + 0.05 Ω	0.01 % Rn
Climatic sequences	- 55 °C + 155 °C/5 moisture cycles	0.1 % Rn + 0.05 Ω	0.01 % Rn
Thermal shock	- 55 °C + 155 °C/5 cycles 30'	0.05 % Rn + 0.05 Ω	0.01 % Rn
Load life	1000 h/Pn at 215 °C	0.5 % Rn	0.25 % Rn
	8000 h/Pn at 215 °C	0.7 % Rn	0.4 % Rn
Resistance to solder heat	260 °C/10 s	0.05 % Rn + 0.05 Ω	0.01 % Rn
Moisture resistance	0.01 Pn at + 40 °C 93 % RH	0.1 % Rn + 0.05 Ω	0.01 % Rn
High temperature storage	1000 h/no load at + 155 °C	0.1 % Rn + 0.05 Ω	0.02 % Rn

Note

- Rn: Nominal resistance



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.