



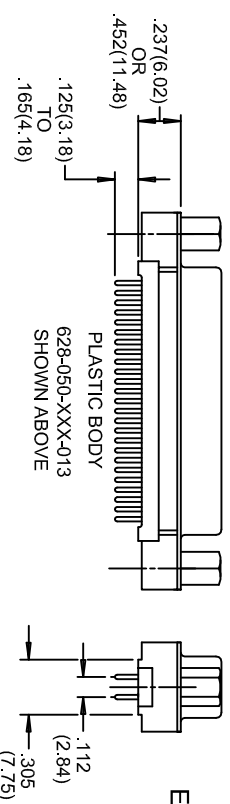


THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO MASTER.

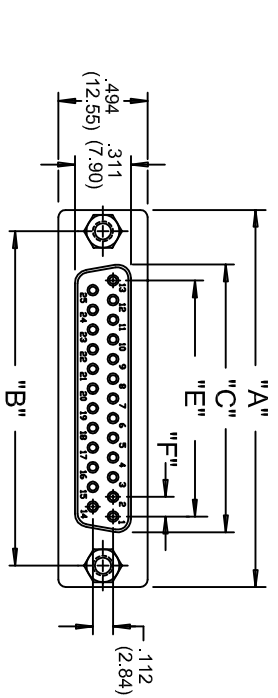

ISSUE NUMBER  
ORIGINAL ①

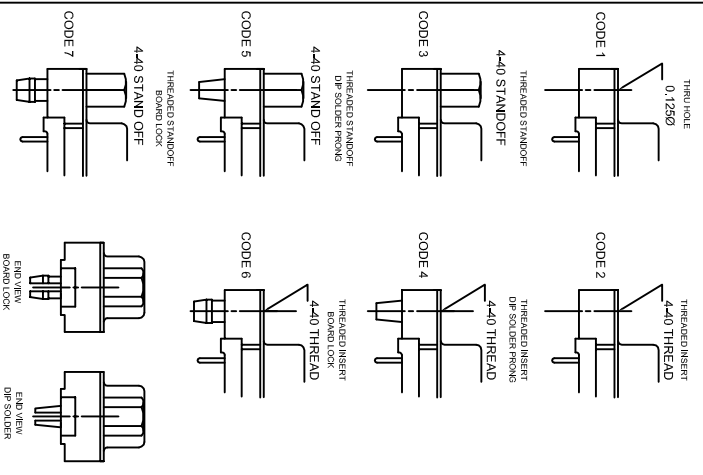

**MATERIALS:**

INSULATOR: THERMOPLASTIC POLYESTER, UL94V-0  
CHEMICAL RESISTANCE, COLOR BLACK  
SHEET: STEEL, NICKEL PLATED  
CONTACT: PHOSPHOR BRONZE  
SELECTIVE GOLD PLATING WITH TIN PLATING ON TAILS

**ELECTRICAL:**

CURRENT RATING: 5 AMPERES  
DIELECTRIC WITHSTANDING VOLTAGE: 1000VAC rms AT SEA LEVEL  
INSULATION RESISTANCE: 5000 MEGOHMS MIN.  
CONTACT RESISTANCE: 10 MILLIOHMS MAX.  
WORKING TEMPERATURE: -55° TO +125° C



THIS SERIES FULLY CONFORMS TO THE  
EUROPEAN UNION DIRECTIVES 2002/95/EC  
AND 2002/96/EC FOR RoHS COMPLIANCY.

NOTE: ALL CONNECTORS WITH THREADED INSERTS MUST WITHSTAND  
A MIN. TORQUE OF 3 Kgf.cm

**ORDERING CODE**  
628-025-320-041

SERIES \_\_\_\_\_  
NUMBER OF CONTACTS \_\_\_\_\_  
PLATING CODE \_\_\_\_\_  
CONTACT CODE \_\_\_\_\_  
EDAC INTERNAL USE \_\_\_\_\_  
GROUNDING FEATURE \_\_\_\_\_  
MOUNTING OPTIONAL \_\_\_\_\_

NUMBER OF CONTACTS	"A" Inch (mm)	"B" Inch (mm)	"C" Inch (mm)	"E" Inch (mm)	"F" Inch (mm)
9	1.214 (30.84)	.984 (24.99)	.642 (16.30)	.432 (10.97)	.108 (2.74)
15	1.545 (39.24)	1.312 (33.32)	.971 (24.66)	.756 (19.20)	.108 (2.74)
25	2.088 (53.04)	1.852 (47.04)	1.511 (38.38)	1.304 (33.12)	.109 (2.76)
37	2.730 (69.34)	2.500 (63.50)	2.159 (54.84)	1.956 (49.68)	.109 (2.76)
50	2.635 (66.93)	2.406 (61.11)	2.064 (52.43)	1.744 (49.68)	.109 (2.76)

**628 SERIES SUBMINIATURE D CONNECTOR**

**RECEPTACLE(SOCKET) VERTICAL PCB**

DRAWN: NSONDHH	DATE: JUL. 12/12
CHECKED:	DATE:
PART NUMBER	
SEE ORDERING CODE	
DRAWING NUMBER	
628-000-008	
ISSUE	1



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

YOUR CONNECTION TO QUALITY & SERVICE

- THROUGH HOLE**  
0.1250
- THREADED INSERT**  
4-40 THREAD
- THREADED STANDOFF**  
4-40 STANDOFF
- THREADED STANDOFF DP SOLDER PRONG**  
4-40 STAND OFF
- THREADED INSERT DP SOLDER PRONG**  
4-40 THREAD
- THREADED STANDOFF DP SOLDER PRONG**  
4-40 STAND OFF
- THREADED STANDOFF BOARD LOCK**  
4-40 STAND OFF
- END VIEW BOARD LOCK**
- END VIEW DP SOLDER PRONG**
- PLATING CODE**
- GOLD FLASH
  - 15 MICRONS GOLD
  - 30 MICRONS GOLD
- CONTACT CODE**
- PC TAILS .125" (3.18) LONG
  - PC TAILS .165" (4.20) LONG HIGH PROFILE ONLY
  - SOLDER CUP TERMINATION
  - 2.8mm FERRITE FILTOR
- EDAC INTERNAL USE**
- INDICATE GENERIC INTERNAL CODE
- GROUNDING FEATURE**
- PLASTIC .237 (6.02) LOW PROFILE POLYESTER
  - PLASTIC .452 (11.48) HIGH PROFILE POLYESTER
  - METAL COVERED .276 (7.00) LOW PROFILE
  - METAL COVERED .472 (12.00) HIGH PROFILE
- MOUNTING OPTION**
- 0.125(3.18) DIA. THROUGH HOLE
  - #4-40 UNC THREADED INSERT
  - #4-40 UNC HEX THREADED STANDOFF
  - #4-40 UNC THREADED INSERT WITH SOLDER PRONGS
  - #4-40 UNC THREADED STANDOFF WITH SOLDER PRONGS
  - #4-40 UNC THREADED INSERT WITH BOARD LOCKS
  - #4-40 UNC THREADED STANDOFF WITH BOARD LOCKS
  - #4-40 UNC THREADED FIXED STANDOFF



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.