
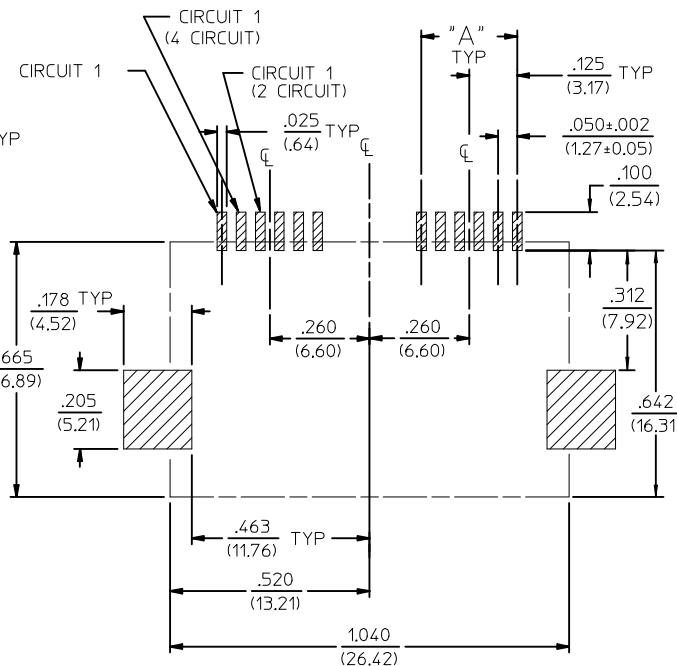
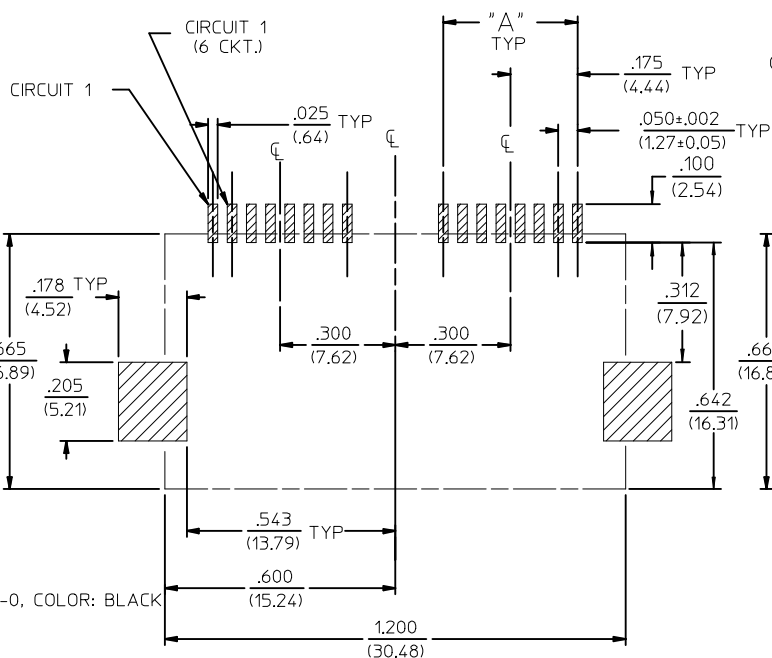
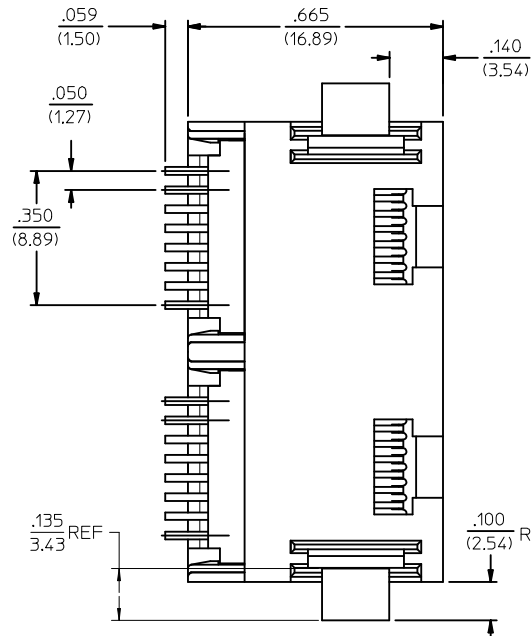
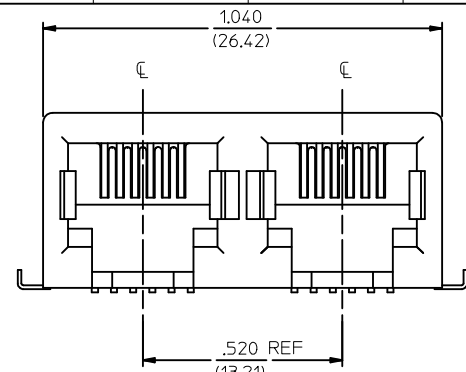
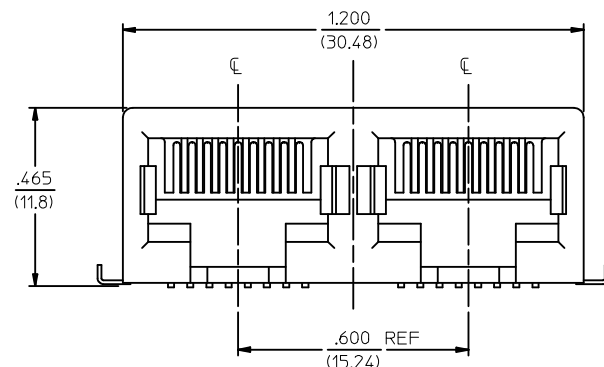


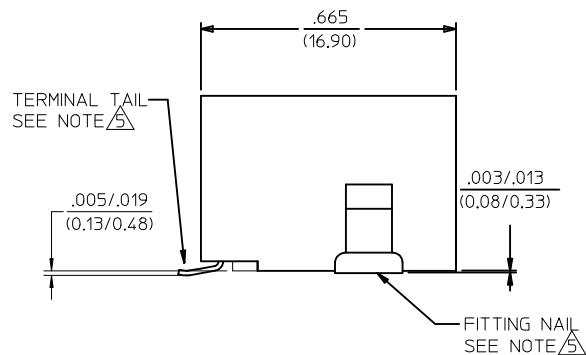

- NOTES:
- MATERIAL:
HOUSING & INSULATOR: NYLON(PA), GLASS FILLED, UL94V-0, COLOR: BLACK
TERMINALS: PHOSPHOR BRONZE, .012/(0.30) THICK
FITTING NAILS: BRASS, .010/(0.25) THICK
 - FINISH:
TERMINALS:
A = SELECT GOLD IN CONTACT AREA: .000050/(0.00127) MIN.,
SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
B = SELECT GOLD IN CONTACT AREA: .000030/(0.00076) MIN.,
SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
C = SELECT GOLD IN CONTACT AREA: .000015/(0.00038) MIN.,
SELECT MATTE TIN IN PC TAIL AREA: .000100/(0.00254) MIN.,
WITH OVERALL NICKEL UNDERPLATE: .000050/(0.00127) MIN.
 - FITTING NAILS:
100 MICROINCHES MATTE TIN OVER 50 MICROINCHES NICKEL UNDERPLATE
 - PRODUCT SPECIFICATION AND PROCESSING PARAMETERS: PS-43743-0001.
 - PACKAGING SPECIFICATION:
CONNECTOR ASSEMBLIES TO BE PACKAGED USING TAPE & REEL SYSTEM.
 - COPLANARITY SPECIFICATION:
WHEN AN ASSEMBLY IS PLACED UPON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .006/(0.15).
 - FOR ASSEMBLIES HAVING VOIDED CIRCUITS, THE TAIL PORTION IS CUT AND REMOVED, THE MATING PORTION OF THE TERMINAL REMAINS INTACT. VOIDED CIRCUITS MUST BE THE SAME FOR BOTH PARTS.
 - CONFORMS TO FCC REGULATION PART 68.5 FOR MODULAR JACKS.

PC BOARD LAYOUT FOR
8 POSITION HOUSING
(COMPONENT SIDE OF BOARD)

PC BOARD LAYOUT FOR
6 POSITION HOUSING
(COMPONENT SIDE OF BOARD)

CORRECT NOTE # EC NO: UCP2013-4879 DR: NGUYEN CHKD: JELL APPR: FSMITH REV: G4	2013/05/31 2013/05/31 2013/06/07	DESCRIPTION QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY PEARSON	DATE 01/07/97	TITLE 4, 6 & 8 CIRCUIT DUAL PORT SMT MODJACK			
			4 PLACES ± --- ± ---	3 PLACES ± --- ± .010	CHECKED BY MUELLER	DATE 01/07/97					
			2 PLACES ± .025 ± .015	1 PLACE ± .38 ± ---	APPROVED BY FSMITH	DATE 2012/10/12					
			0 PLACE ± --- ± ---	MATERIAL NO.		DOCUMENT NO.	SHEET NO.				
			ANGULAR ±1/2°			SEE CHART					SD-43841-001
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

13

12

11

10

9

8

7

6

5

4

3

2

1

ASSEMBLY ITEM NO.	CONNECTOR SIZE	CIRCUIT SIZE	TERMINAL PLATING	TAPE & REEL PACKAGING NO.	VOIDED CIRCUITS
43841-0001	8	4	A	PK-70873-7004	NA
43841-0002	8	6	A	PK-70873-7004	
43841-0003	8	8	A	PK-70873-7004	
43841-0004	6	4	A	PK-70873-7003	
43841-0005	6	6	A	PK-70873-7003	
43841-0006	8	4	B	PK-70873-7004	
43841-0007	8	6	B	PK-70873-7004	
43841-0008	8	8	B	PK-70873-7004	
43841-0009	6	4	B	PK-70873-7003	
43841-0010	6	6	B	PK-70873-7003	
43841-0011	8	4	C	PK-70873-7004	
43841-0012	8	6	C	PK-70873-7004	
43841-0013	8	8	C	PK-70873-7004	
43841-0014	6	4	C	PK-70873-7003	
43841-0015	6	6	C	PK-70873-7003	
43841-0016	6	2	A	PK-70873-7003	
43841-0017	6	2	B	PK-70873-7003	
43841-0018	6	2	C	PK-70873-7003	NA

HOUSING SIZE	CIRCUIT SIZE	DIM. A
6	6	.250 (6.35)
6	4	.150 (3.81)
6	2	.050 (1.27)
8	8	.350 (8.89)
8	6	.250 (6.35)
8	4	.150 (3.81)

COVER TAPE

REEL

VACUUM FORMED CARRIER TAPE WITH SPROCKET HOLES

TAPE AND REEL PACKAGING

TERMINAL CUTOFF POINT

VIEW SHOWING TYPICAL TERMINAL CUTOFF OF TAIL (SEE NOTE 6) FOR VOIDED CIRCUITS.

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)

DIMENSION STYLE

SCALE

DESIGN UNITS

THIRD ANGLE PROJECTION

SEE SHEET ONE

EC NO: UCP2013-4879

DRWN:NGUYEN

CHKD:JBELL

APPR:FSMITH

REV

DESCRIPTION

REV

4 PLACES

3 PLACES

2 PLACES

1 PLACE

0 PLACE

mm

INCH

DRAWN BY

CHECKED BY

APPROVED BY

MATERIAL NO.

DATE

DATE

DATE

DATE

PEARSON

MUELLER

FSMITH

SEE CHART

01/07/97

01/07/97

2012/10/12

SD-43841-001

DOCUMENT NO.

SHEET NO.

2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

12

11

10

9

8

7

6

5

4

3

2

1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.