

6 dB directional coupler 7206.31.0002

Directional Coupler

Description

This Directional Coupler is designed to cover the frequency range from 694 to 2700 MHz. It directs a defined fraction of signal with minimal reflections or loss from the main line to a coupled line. Available with different values of coupling. It benefits from the excellent PIM performances and compact size of the newly developed interface 4.3-10.



Technical Data

Electrical Data

	Band 1
Frequency	0.694 - 2.7 GHz
Return loss	19 dB
Coupling	6 dB
Coupling flatness	+/- 1 dB
Coupling loss	1.26 dB
Dissipative loss	0.25 dB
Directivity	20 dB
Max. composite power	200 W
Peak envelope power	1000 W
Intermodulation distortion	-161 dBc
@ 2 x carrier power	43 dBm

	Main Line In	Main Line Out	Coupled Port
Port Designation	IN	OUT	-6 dB
Connector Type	4.3-10	4.3-10	4.3-10
Gender	jack (female)	jack (female)	jack (female)

Char. impedance 50 Ω

Mechanical Data

Dimensions 42 x 123 x 25 mm (Height x Width x Depth)
Weight 0.48 kg

Environmental Data

Environmental conditions outdoor
Operation temperature -40 °C to 85 °C
Storage temperature -40 °C to 85 °C
Transport temperature -40 °C to 85 °C
IP rating IP67
2011/65/EU (RoHS - including 2015/863 and 2017/2102) compliant


Material Data

Housing Material Aluminium
Surface treatment Black paint

Related Documents

Outline drawing DOU-00319142

6 dB directional coupler 7206.31.0002

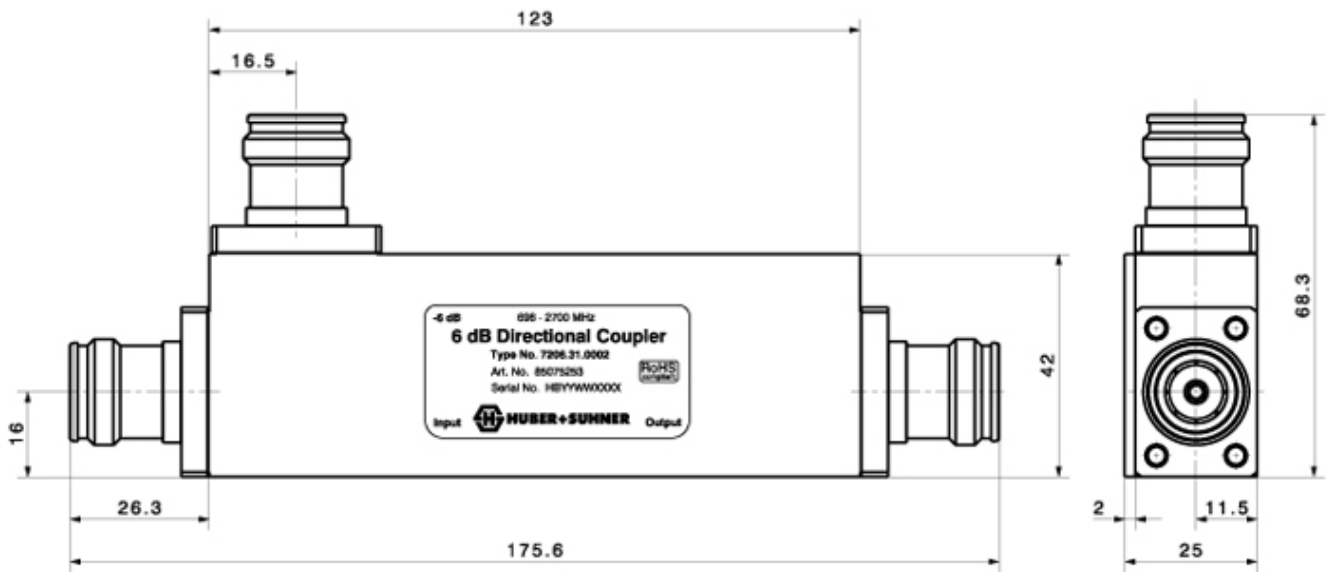

„dimensions in mm“

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HUBER+SUHNER:](#)

[7206.31.0002](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.