

International
IOR Rectifier

QUIETIR Series
70EPF..

FAST SOFT RECOVERY
RECTIFIER DIODE



$$V_F < 1.33V @ 70A$$

$$t_{rr} = 70ns$$

$$V_{RRM} 200/600V$$

Major Ratings and Characteristics

Characteristics	70EPF..	Units
$I_{F(AV)}$ 180° Sin. Conduction @ $T_C = 97^\circ C$	70	A
V_{RRM} range	200/600	V
$I_{F(RMS)}$	135	A
V_F @ 70A, $T_J = 25^\circ C$	1.33	V
t_{rr} @ 1A, -100A/ μs	70	ns
T_J range	-40 to 150	$^\circ C$

Description/Features

The 70EPF.. fast soft recovery **QUIETIR** rectifier series has been optimized for combined short reverse recovery time and low forward voltage drop.

The glass passivation ensures stable reliable operation in the most severe temperature and power cycling conditions.

Available in the new **PowIRtab**™ package, this new series is suitable for a large range of applications combining excellent die to footprint ratio and sturdiness connectivity for use in high current environments.

Typical applications are both:

- Output rectification and freewheeling in inverters, choppers and converters
- Input rectifications where severe restrictions on conducted EMI should be met.

Case Styles

70EPF..



70EPF..J



(*) for higher voltage up to 1600V contact factory

Voltage Ratings

Part Number	V_{RRM} , maximum peak reverse voltage V	V_{RSM} , maximum non repetitive peak reverse voltage V	I_{RRM} 150°C mA
70EPF02	200	300	13
70EPF04	400	500	
70EPF06	600	700	

Absolute Maximum Ratings


Parameters	70EPF..	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current	70	A	@ $T_C = 97^\circ\text{C}$, 180° conduction half sine wave
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	850	A	10ms Sine pulse, rated V_{RRM} applied
	1000		10ms Sine pulse, no voltage reapplied
I^2t Max. I^2t for fusing	3600	A^2s	10ms Sine pulse, rated V_{RRM} applied
	5100		10ms Sine pulse, no voltage reapplied
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for fusing	51000	$\text{A}^2\sqrt{\text{s}}$	10ms, no voltage reapplied

Electrical Specifications

Parameters	70EPF..	Units	Conditions
V_{FM} Max. Forward Voltage Drop	1.33	V	@ 70A, $T_J = 25^\circ\text{C}$
r_t Forward slope resistance	3.65	mΩ	$T_J = 150^\circ\text{C}$
$V_{F(TO)}$ Threshold voltage	0.918	V	
I_{RM} Max. Reverse Leakage Current	0.1	mA	$T_J = 25^\circ\text{C}$ $V_R = \text{rated } V_{RRM}$
	13		$T_J = 150^\circ\text{C}$

Recovery Characteristics

Parameters	70EPF..	Units	Conditions
t_{rr} Reverse Recovery Time	200	ns	$I_F @ 70\text{Apk}$ @ 25A/μs @ 25°C
I_{rr} Reverse Recovery Current	4	A	
Q_{rr} Reverse Recovery Charge	0.67	μC	
S Snap Factor	0.5		



Thermal-Mechanical Specifications

Parameters			70EPF..	Units	Conditions
T _J	Max. Junction Temperature Range		-40to150	°C	
T _{stg}	Max. Storage Temperature Range		-40to150	°C	
R _{thJC}	Max. Thermal Resistance Junction to Case		0.35	°C/W	DCoperation
R _{thJA}	Max. Thermal Resistance Junction to Ambient		40	°C/W	
R _{thCS}	Typical Thermal Resistance, Case to Heatsink		0.2	°C/W	Mountingsurface , smooth and greased
wt	Approximate Weight		6(0.21)	g(oz.)	
T	Mounting Torque	Min.	6(5)	Kg-cm (lbf-in)	
		Max.	12(10)		
Case Style			PowIRtab™		

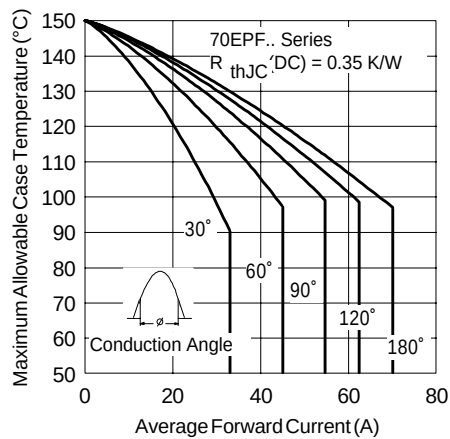


Fig. 1 - Current Rating Characteristics

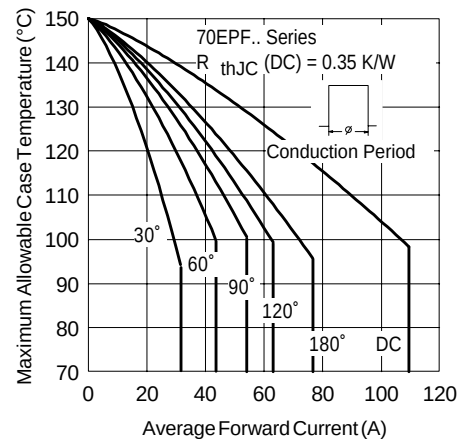


Fig. 2 - Current Rating Characteristics

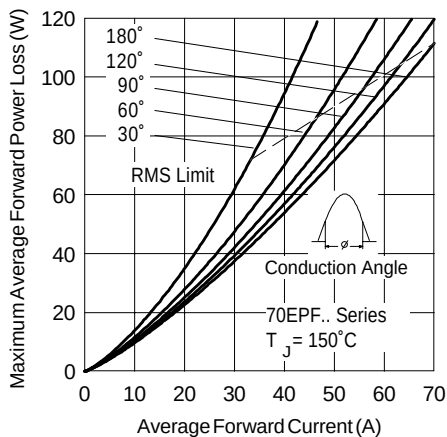


Fig. 3 - Forward Power Loss Characteristics

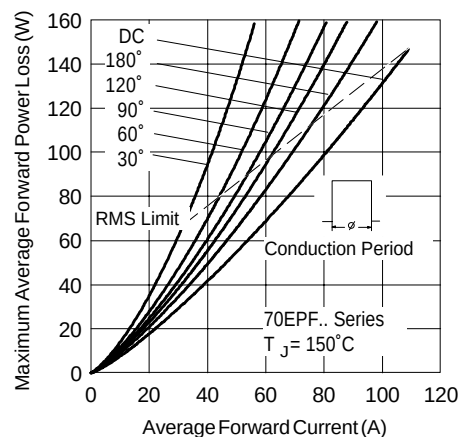


Fig. 4 - Forward Power Loss Characteristics

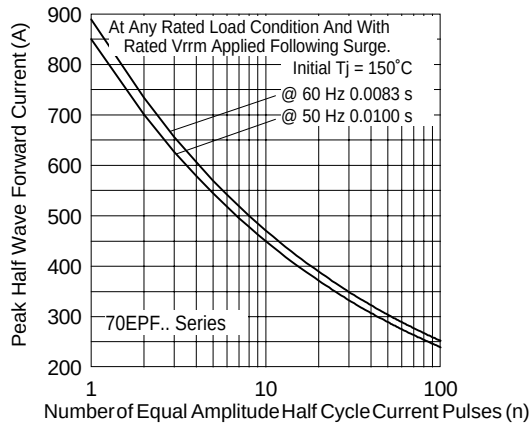


Fig. 5- Maximum Non-Repetitive Surge Current

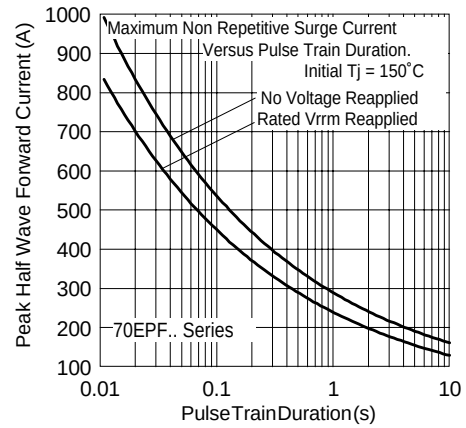


Fig. 6- Maximum Non-Repetitive Surge Current

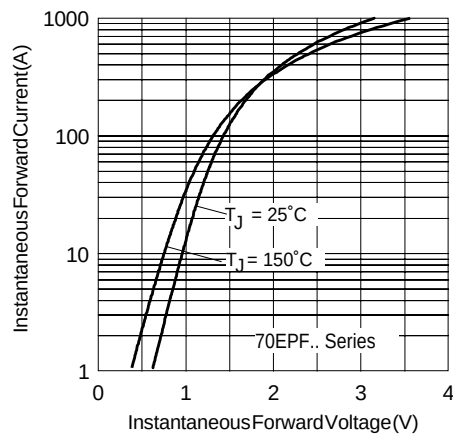


Fig. 7- Forward Voltage Drop Characteristics

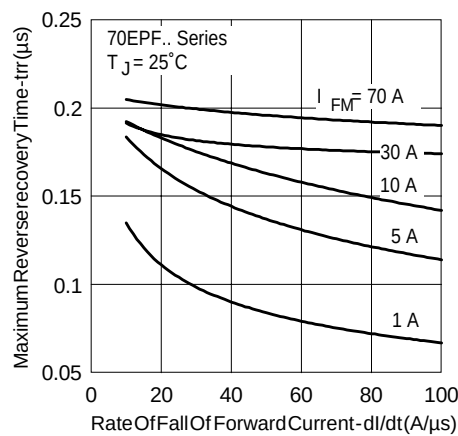


Fig. 8- Recovery Time Characteristics, $T_J = 25^\circ\text{C}$

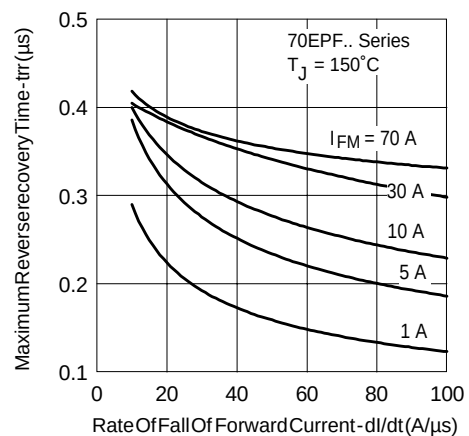


Fig. 9- Recovery Time Characteristics, $T_J = 150^\circ\text{C}$

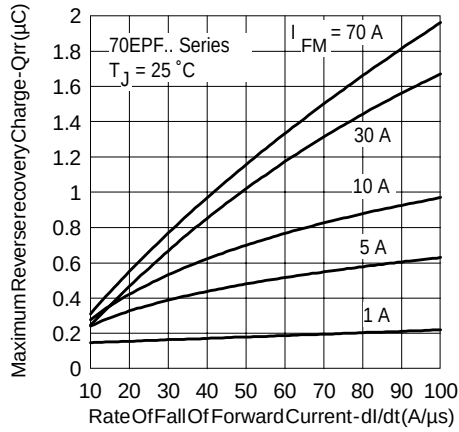


Fig. 10 - Recovery Charge Characteristics, $T_j = 25^\circ\text{C}$

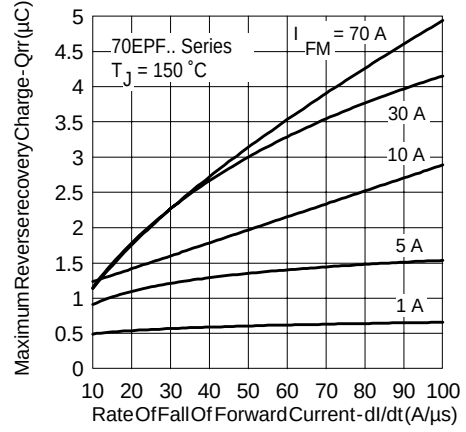


Fig. 11 - Recovery Charge Characteristics, $T_j = 150^\circ\text{C}$

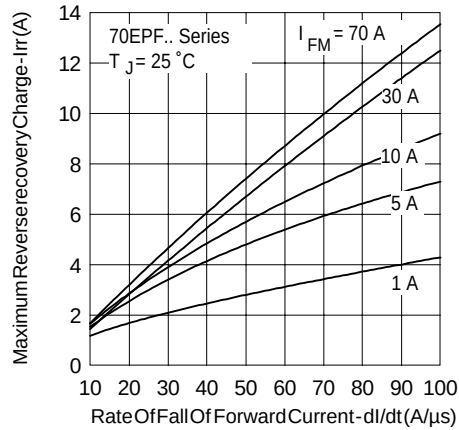


Fig. 12 - Recovery Current Characteristics, $T_j = 25^\circ\text{C}$

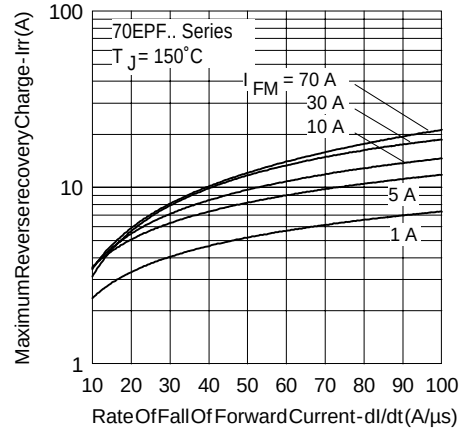


Fig. 13 - Recovery Current Characteristics, $T_j = 150^\circ\text{C}$



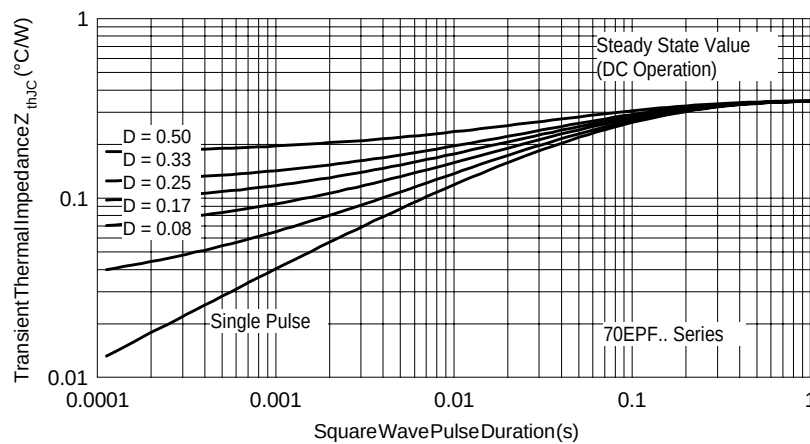


Fig. 14 - Thermal Impedance Z_{thJC} Characteristics

Outline Table

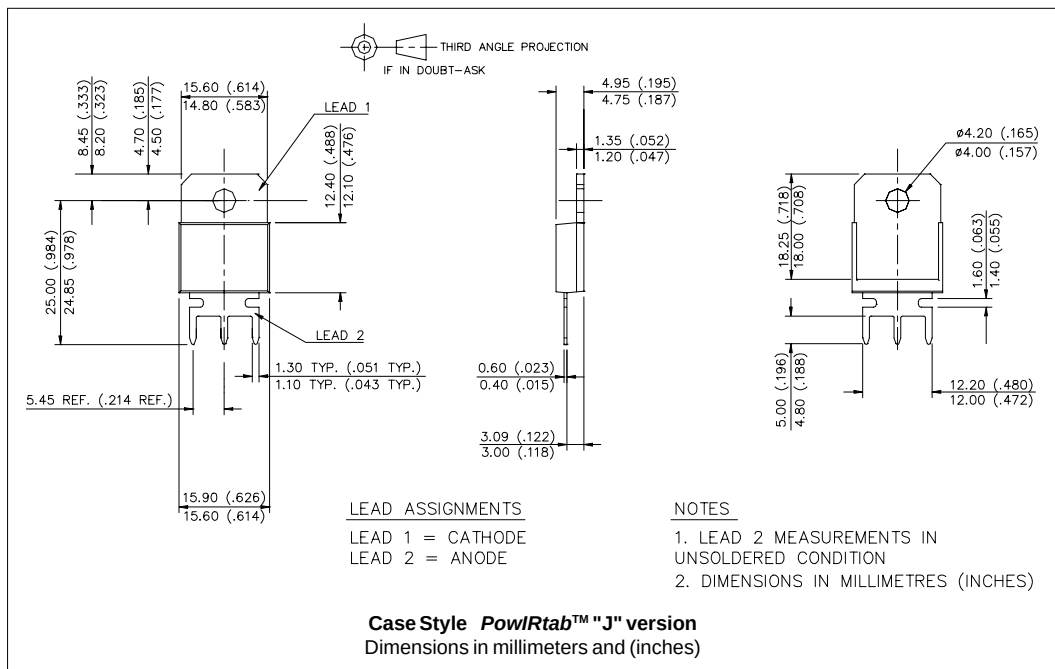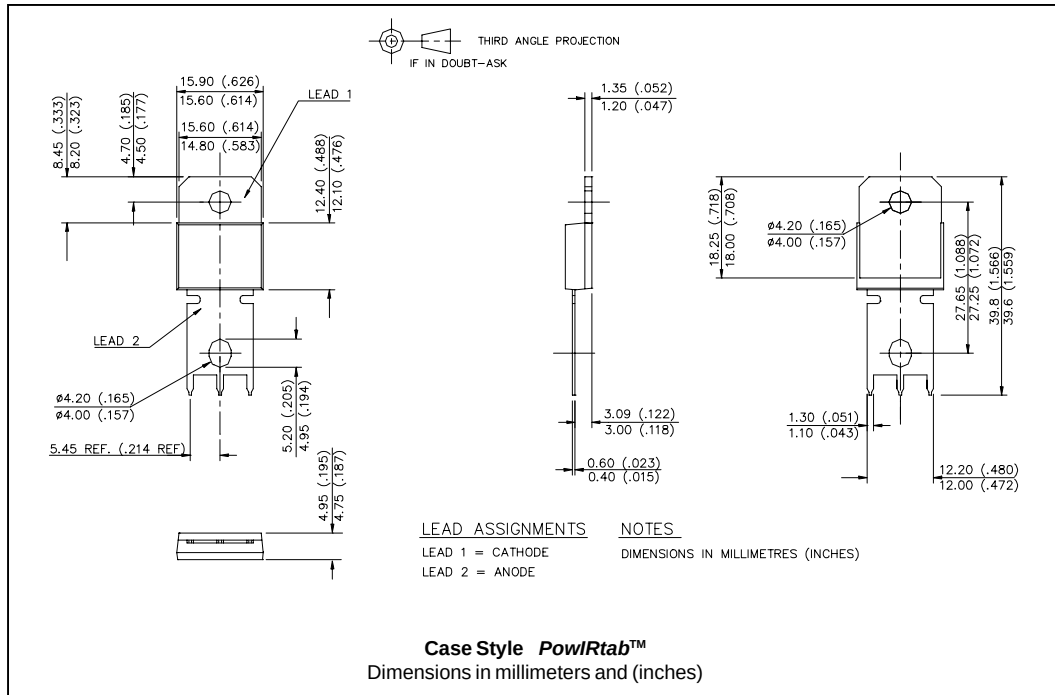

Ordering Information Table

Device Code					
70	E	P	F	06	J
1	2	3	4	5	6

1	-	Current Rating
2	-	Circuit Configuration: E = Single Diode
3	-	Package: P = TO-247AC
4	-	Type of Silicon: F = Fast Recovery
5	-	Voltage code: Code x 100 = V_{RRM} (*)
6	-	none = PowIRtab™ standard J = Short Lead Version

02 = 200V
04 = 400V
06 = 600V

Base Cathode

1

2

Anode

(*) for higher voltage up to 1600V contact factory

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7309

Visit us at www.irf.com for sales contact information. 12/02



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.