



Micro Commercial Components



Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MCM1208

P-Channel Power MOSFET

Features


- Advanced trench MOSFET process technology
- Ultra low on-resistance with low gate charge
- Halogen free available upon request by adding suffix "-HF"
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking: 1208

Maximum Ratings @ 25°C Unless Otherwise Specified


Symbol	Parameter	Rating	Unit
V _{DS}	Drain-source Voltage	-12	V
I _D	Drain Current-Continuous	-8	A
I _{DM}	Pulsed Drain Current (note1)	-28	A
V _{GS}	Gate-source Voltage	± 8	V
R _{θJA}	Thermal Resistance Junction to Ambient(note1)	357	°C/W
T _J	Operating Junction Temperature	-55 to +150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

(1). Repetitive rating: Pulse width limited by junction temperature

Equivalent Circuit



DFN2020-6J

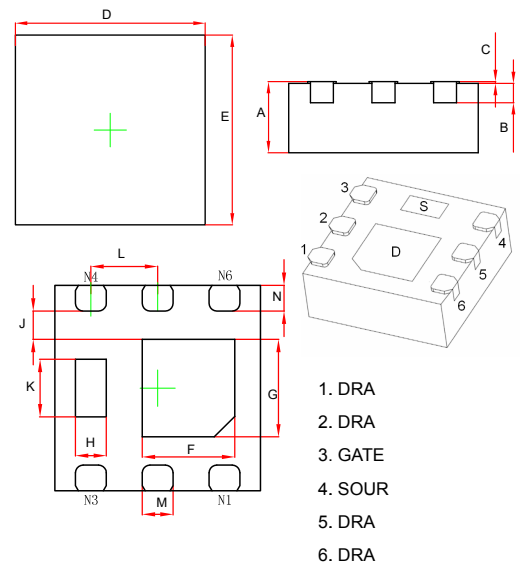

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.028	.032	0.700	0.800	
B	0.008REF.		0.203REF.		
C	0.000	0.002	0.000	0.050	
D	0.076	0.082	1.924	2.076	
E	0.076	0.082	1.924	2.076	
F	0.031	0.039	0.800	1.000	
G	0.033	0.041	0.850	1.050	
H	0.008	0.016	0.200	0.400	
J	0.008	---	0.200	---	
K	0.018	0.026	0.460	0.660	
L	0.026TYP.		0.650TYP.		
M	0.010	0.014	0.250	0.350	
N	0.007	0.013	0.174	0.326	


ELECTRICAL CHARACTERISTICS(T_a=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-12			V
Zero gate voltage drain current	I _{DSS}	V _{DS} = -12V, V _{GS} = 0V			-1	μA
Gate-body leakage current	I _{GSS}	V _{GS} = ±8V, V _{DS} = 0V			±0.1	uA
Gate threshold voltage (note 1)	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-0.4		-1	V
Drain-source on-resistance (note 1)	R _{DS(on)}	V _{GS} = -4.5V, I _D = -5A			28	mΩ
		V _{GS} = -3.7V, I _D = -4.6A			32	
		V _{GS} = -2.5V, I _D = -4.3A			40	
		V _{GS} = -1.8V, I _D = -1A			63	
		V _{GS} = -1.5V, I _D = -0.5A			150	
Forward tranconductance (note 1)	g _{FS}	V _{DS} = -5V, I _D = -5A		18		S
Dynamic characteristics (note 2)						
Input Capacitance	C _{iss}	V _{DS} = -6V, V _{GS} = 0V, f = 1MHz		1275		pF
Output Capacitance	C _{oss}			255		pF
Reverse Transfer Capacitance	C _{rss}			236		pF
Gate resistance	R _g	f = 1MHz	1.9		19	Ω
Total Gate Charge	Q _g	V _{DS} = -6V, V _{GS} = -4.5V, I _D = -5A		14	21	nC
Gate-Source Charge	Q _{gs}			2.3		nC
Gate-Drain Charge	Q _{gd}			3.6		nC
Turn-on delay time	t _{d(on)}	V _{DD} = -6V, V _{GEN} = -4.5V, I _D = -4A R _L = 6Ω, R _{GEN} = 1Ω		26	40	ns
Turn-on rise time	t _r			24	40	ns
Turn-off delay time	t _{d(off)}			45	70	ns
Turn-off fall time	t _f			20	35	ns
Source-Drain Diode characteristics						
Diode forward current	I _S				-8	A
Diode pulsed forward current	I _{SM}				-28	A
Diode Forward voltage (note 1)	V _{DS}	V _{GS} = 0V, I _S = -4A			-1.2	V
Diode reverse recovery time (note 2)	t _{rr}	I _F = -4A, di/dt = 100A/μs		24	48	ns
Diode reverse recovery charge (note 2)	Q _{rr}			8	16	nC


Notes : 1. Pulse test; pulse width ≤ 300μs, duty cycles ≤ 2%.

Typical Characteristics


Output Characteristics

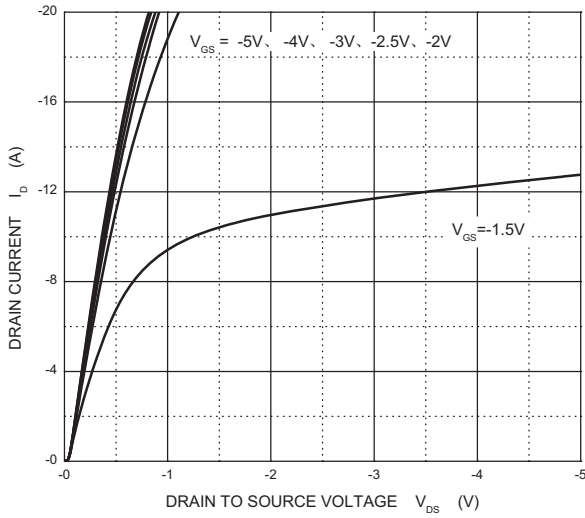


Transfer Characteristics

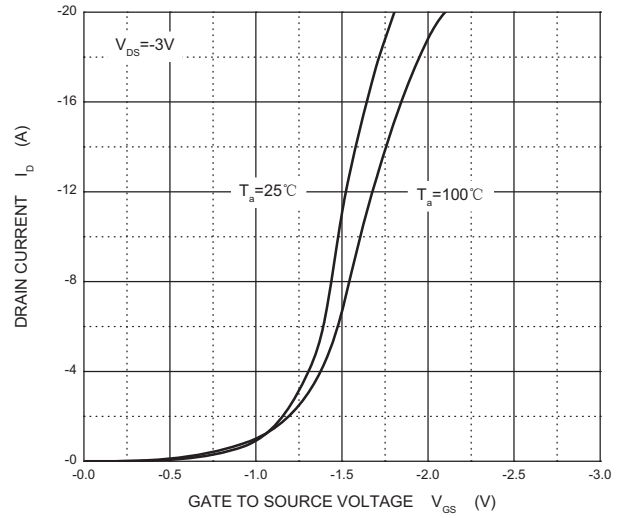


$R_{DS(ON)}$ — I_D

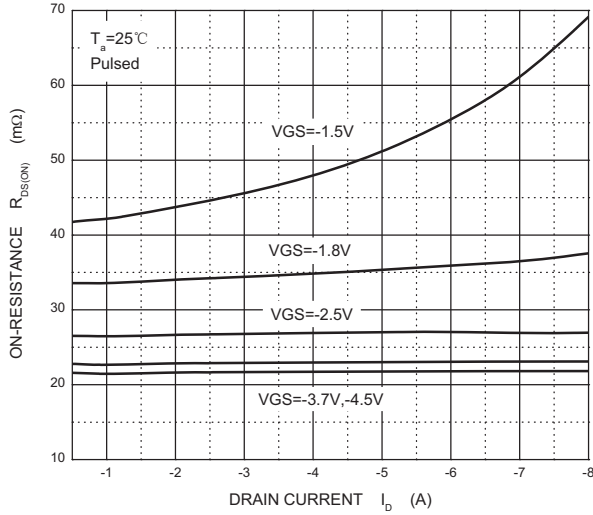


$R_{DS(ON)}$ — V_{GS}

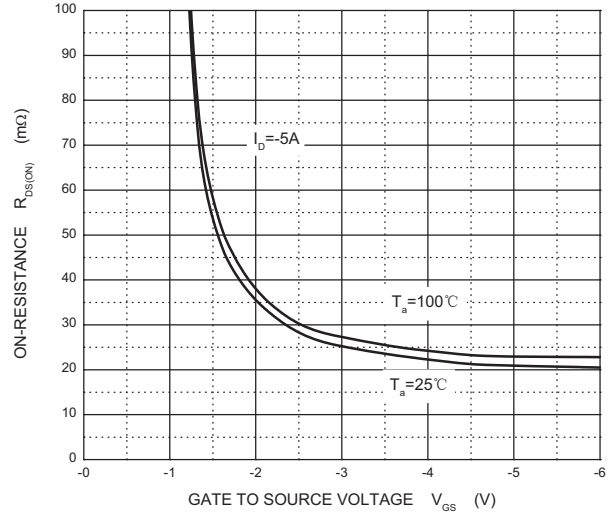

I_S — V_{SD}

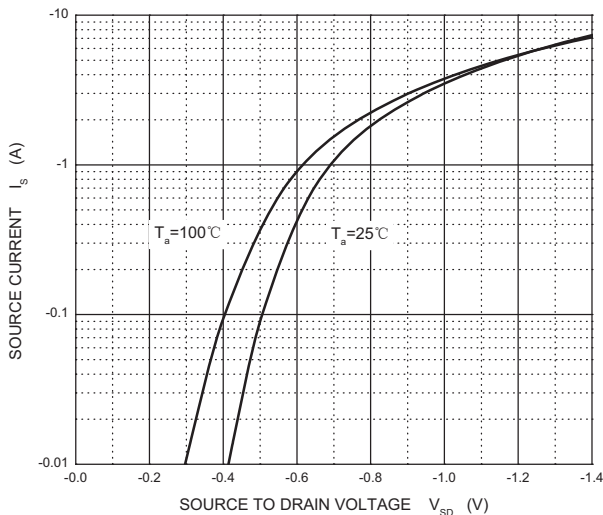

Threshold Voltage

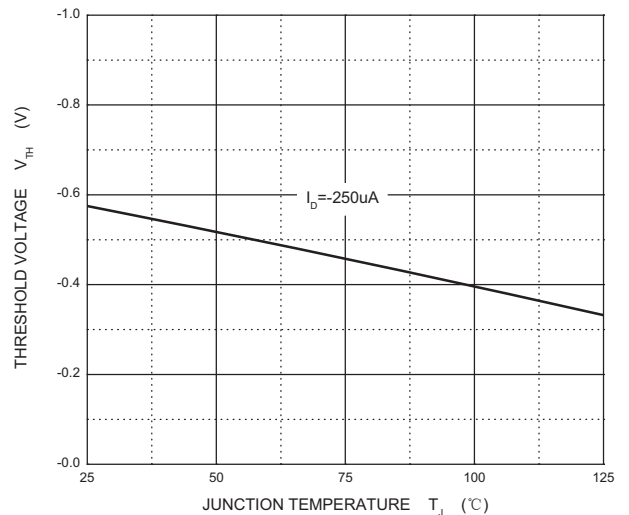



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.