



# SRJ / SRK / SRM / SRT Series




## SRJ-SERIES

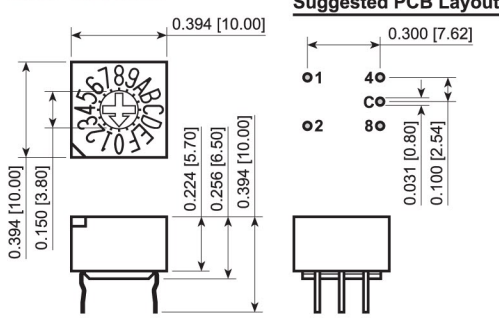


### Position Options




### Actuator Options




## SRK-SERIES

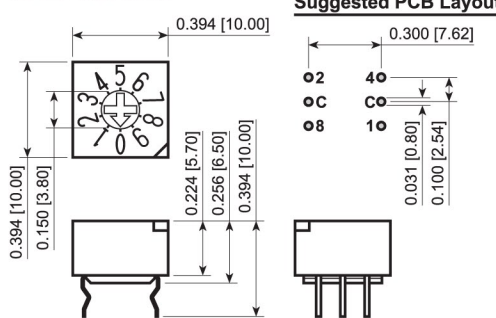

### Position Options



### Actuator Options



### FEATURES:

- 3x2, 3x3, and 4x1 Pin Layouts
- Through Hole and Surface Mount Versions
- Washable
- Superior Quality


### SPECIFICATIONS:

**RATING:** 100mA 5VDC (Switching)  
100mA 50VDC (Non-Switching)  
**TEMPERATURE:** -10°C to 60°C (Operating)  
-40°C to 85°C (Storage)  
**OPERATING FORCE:** 400gf\*cm  
**ELECTRICAL LIFE:** 15,000 Cycles  
**CONTACT RESISTANCE:** 100mΩ Max.  
**INSULATION RESISTANCE:** 100MΩ at 250VDC  
**DIELECTRIC STRENGTH:** 250VAC for 1 Minute



### MATERIALS:

**BASE:** Polyphenylene Sulfide (PPS)  
**HOUSING:** Polyphenylene Sulfide (PPS)  
**ACTUATOR:** Polyacetal  
**O-RING:** NBR  
**CONTACT:** Glass Fabric Epoxy Resin  
Gold Over Nickel Plated  
**TERMINALS:** Gold Over Nickel Plated Bronze  
Tin Over Nickel Plated Bronze


## SRM-SERIES

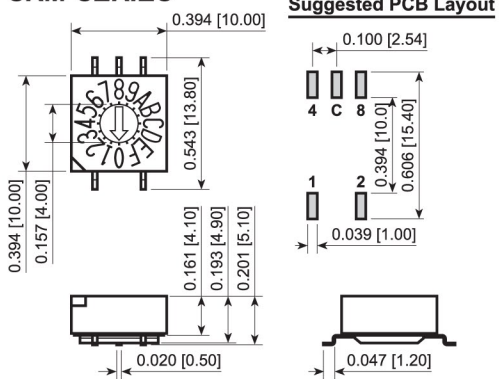


### Position Options

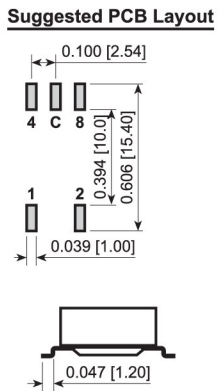



## SRT-SERIES

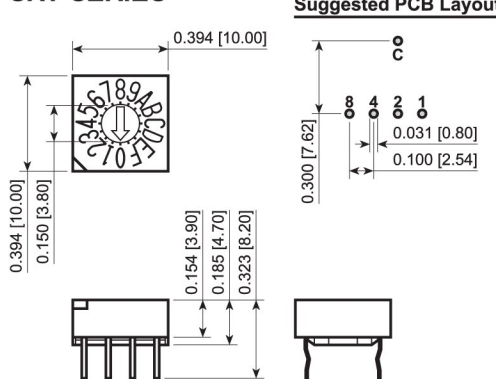

### Position Options



### Right Angle Option




SRJ-8  
SRJ-10HC




SRT-10

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



SRK-10H



SRM-10T

Series	Number of Positions	Actuator Options	Right Angle Option	Encoding Options	Tape Sealing	Packaging Options
SRJ - 2x3, Through Hole	8	For SRJ and SRK Series: None - Flush	For SRJ, SRK, and SRM Series: None - Vertical	None - Real	For SRJ, SRK, and SRT Series: None - No Tape	For SRJ, SRK, and SRT Series: None - Tube
SRK - 3x3, Through Hole	10	H - Extended	For SRT Series: None - Vertical	C - Complementary	For SRM Series: None - No Tape	For SRM Series: None - Tube
SRM - 2x3, SMT	16		R - Right Angle		T - Taped	TR - Tape and Reel
SRT - 4x1, Through Hole						

### EXAMPLE PART NUMBERS:

SRJ-10	10 Position 2x3, Through Hole, Flush, Real Code
SRJ-16	16 Position 2x3, Through Hole, Flush, Real Code
SRK-10	10 Position 3x3, Through Hole, Flush, Real Code
SRK-10C	10 Position 3x3, Through Hole, Flush, Comp. Code
SRK-10H	10 Position 3x3, Through Hole, Raised, Real Code
SRK-16	16 Position 3x3, Through Hole, Flush, Real Code
SRK-16C	16 Position 3x3, Through Hole, Flush, Comp. Code
SRK-16H	16 Position 3x3, Through Hole, Raised, Real Code
SRK-16HC	16 Position 3x3, Through Hole, Raised, Comp. Code
SRM-10	10 Position 3x3, SMT, Flush Actuator, Real Code
SRM-10C	10 Position 3x3, SMT, Flush Actuator, Comp. Code
SRM-16	16 Position 3x3, SMT, Flush Actuator, Real Code
SRM-16C	16 Position 3x3, SMT, Flush Actuator, Comp. Code
SRT-10	10 Position 4x1, Through Hole, Flush, Real Code



E-SWITCH®

www.e-switch.com

800.867.2717

DIP



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.