



Euro Feed-through Terminal Block

Article: **10134257-001LF**

Feed-through terminal block - Grey
Screw connection - 70mm² / 3/0AWG - Width 26 mm

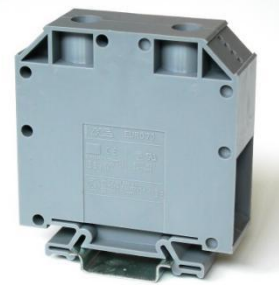

GENERAL DATA

Series	EURO 70
Item	10134257
Weight/Piece	174 g
Colour	Grey
Q.ty p.pck.	10
Q.ty p. box	160

TECHNICAL DATA / DIMENSIONS

Dimensions

Width mm(in.)	26 (1.02)
Length mm(in.)	74 (2.91)
Height mm(in.)	75 (2.96)
Mounting type (EN 60715)	Omega TH35

Technical data

Maximum load current	192A
Insulating material	PA 66
Self-extinguishing degree acc. to UL94	V2
Rated surge voltage	6kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Nominal Voltage	800V
Nominal Current	192A
Temperature index, insulating material – Elec. UL 746 B - RTI	130°C
Static insulating material lower permissible temperature	-60°C

Connection data

Conductor cross-section solid min/max	35 / 70 mm ²
Conductor cross-section stranded min/max	35 / 70 mm ²

Euro Feed-through Terminal Block

AWG min/max	4-3/0 AWG
Max conductor cross-section stranded with ferrule with plastic sleeve	-
Stripping length	max 20mm
Screw	M8 - Ch 6 - recessed hexagon – Zinc plated steel
Tightening torque	4,5Nm / 40 Lb-In
Clamp	Zinc plated steel
Current bar	Tin Plated copper alloy

APPROVALS


RINA **EN60947-7-1** 70mm² – 800V – 192A

EN60068-2-11 Salt mist test for 96 hours

UL® **UL1059**

SCCR 100kA AWG 4-3/0 – 600V – 185A

TECHNICAL DRAWINGS

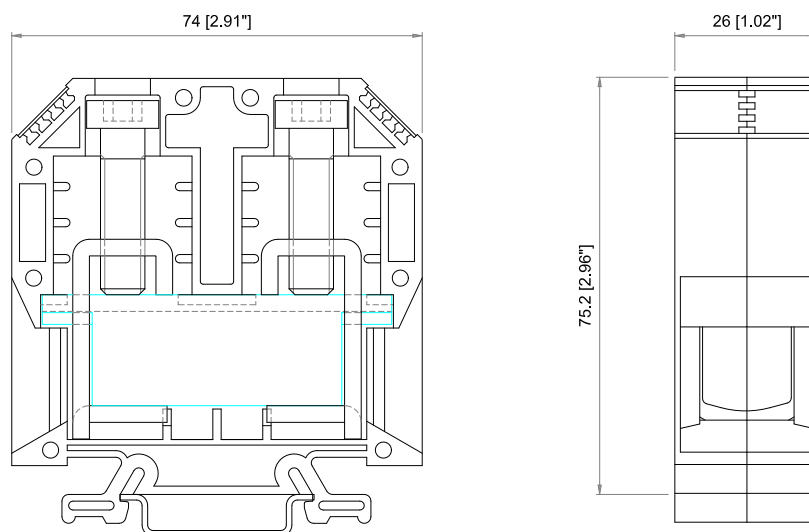

ACCESSORIES

Marking

Item	Description
10134398-001LF	Single-digit marking tag (5 x 3 mm) - white
10134398-002LF ~ 10134398-011LF	Single-digit marking tag (5 x 3 mm) – with marking: 0 ~ 9
10134398-012LF ~ 10134398-036LF	Single-digit marking tag (5 x 3 mm) – with marking: A ~ Z
10134399-001LF	Marking tag adapter – 6 slots for marking tags
10134401-001LF	Marking tags (6 x 12 mm) - white (special marking on request)
10134449-001LF	Tags 6x12mm (39tags x 20cards)

DIN RAIL system - Mounting and Installation material

Item	Description
10134392-001LF	Steel Omega rail 35/7,5mm - 2mt length
10134393-001LF	Slotted steel Omega rail 35/7,5mm - 2mt length
10134394-001LF	Steel Omega rail 35/15mm - 2mt length
10134395-001LF	Slotted steel Omega rail 35/15mm - 2mt length
10134387-001LF	Angled support bracket
10134389-001LF	EURO STOP - End bracket width 9
10134390-001LF	EURO STOP - End bracket width 6
10134391-001LF	EURO STOP - Snap-on end bracket width 6



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.