

VIP-3/SC/FLK40

Order No.: 2315078



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2315078>

VARIOFACE module, with screw connection and flat-ribbon cable plug connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 40-pos.



Commercial data	
EAN	4046356313292
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.204 KG
Catalog page information	Page 279 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
09/02/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data	
Nominal voltage U_N	60 V AC/DC
Max. current carrying capacity per branch	1 A
Number of positions	40
Width	77.4 mm

Height	60.8 mm
Depth	68.8 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3
Connection 2	Control system level
Number of connections	1
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	40

Certificates / Approvals

Certification CSA, CUL, UL

CSA

Nominal voltage U _N	125 V
--------------------------------	-------

Nominal current I_N	1 A
AWG/kcmil	30-12

CUL

Nominal voltage U_N	125 V
Nominal current I_N	1 A
AWG/kcmil	30-12

UL

Nominal voltage U_N	125 V
Nominal current I_N	1 A
AWG/kcmil	30-12

Accessories


Item	Designation	Description
Cable/conductor		
2288985	FLK 40/EZ-DR/ 50/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 0.5 m
2288998	FLK 40/EZ-DR/ 100/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 1 m
2289007	FLK 40/EZ-DR/ 150/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 1.5 m
2289010	FLK 40/EZ-DR/ 200/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 2 m
2289023	FLK 40/EZ-DR/ 250/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 2.5 m
2289036	FLK 40/EZ-DR/ 300/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 3 m
2289049	FLK 40/EZ-DR/ 350/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 3.5 m
2289052	FLK 40/EZ-DR/ 400/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 4 m

2299589	FLK 40/EZ-DR/ 600/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 6 m
2299592	FLK 40/EZ-DR/ 800/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 8 m
2299602	FLK 40/EZ-DR/1000/KONFEK	Round cable sets, with two 40-pos. socket strips (1:1 connection), also for use with Siemens SIMATIC® S5-95U and 100U (32 x digital IN/OUT), cable length: 10 m
2295046	FLK EZ-DR-S.../.../...	Round cable, with preassembly, shielded, variable cable length
2318855	VIP-CAB-FLK40-0,14/...	Assembled round cable with two molded 40-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: Variable
2318787	VIP-CAB-FLK40/0,14/0,5M	Assembled round cable with two molded 40-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m
2318790	VIP-CAB-FLK40/0,14/1,0M	Assembled round cable with two molded 40-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m
2318800	VIP-CAB-FLK40/0,14/1,5M	Assembled round cable with two molded 40-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m
2318813	VIP-CAB-FLK40/0,14/2,0M	Assembled round cable with two molded 40-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m
2318826	VIP-CAB-FLK40/0,14/3,0M	Assembled round cable with two molded 40-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m
2318839	VIP-CAB-FLK40/0,14/4,0M	Assembled round cable with two molded 40-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m
2318842	VIP-CAB-FLK40/0,14/6,0M	Assembled round cable with two molded 40-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m
General		
5147777	BLUEMARK X1	Printers with UV technology for printing plastic labels in UniCard format.
Marking		
0818111	UC-TM 4	UniCard sheets, for labeling terminal blocks using a Zack marker strip groove, 120-section, can be labeled with BLUEMARK X1 and CMS-P1-PLOTTER, color: White
0818085	UC-TM 6	UniCard sheets, for labeling terminal blocks using Zack marker strip groove, 80-section, labeling with BLUEMARK X1 and CMS-P1-PLOTTER, color: White

0811862	ZB 22:UNBEDRUCKT	Zack marker strip, unprinted: 4-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 22 mm, color: White
0809793	ZB 5,08:UNBEDRUCKT	Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks per pack

Diagrams/Drawings

Circuit diagram

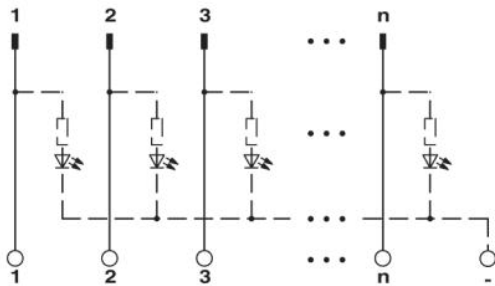

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.