

Choose one component from each of the colored sections to assemble a complete switch.
For other options or further information please contact EAO Switch directly.

Product Profile

The Series 51 is a high quality switch range that includes pushbuttons, indicators, illuminated selector switches and keylock switches. It is possible to choose up to 4NO/4NC snap-action switching elements per switch. Low level switching elements are also available.

Technical drawings see pages 56-57

- IP65 Protection
- Switch Rating, 5A, 250VAC
- Raised Mounting into 16mm cut out
- Illumination using midget-grooved T-1 $\frac{1}{3}$ lamps or single chip LED's
- All standard lenses are transparent with translucent white diffusers, and are available in different colors
- For keylock switches 2 key systems and 145 different key codes are available
- QC versions also available

Indicator



Indicator bodies, raised in round, square and rectangular, black plastic, 16mm mounting, solder terminals

Image	Part No.	Size
1	51-040.005	18 x 24mm
2	51-050.005	18 x 18mm
3	51-030.005	18mm Ø

Illuminated pushbutton



Illuminated pushbutton, snap-action, raised, rectangular, black plastic, 16mm mounting, solder terminals, gold over silver contacts

Part No.	Action	Contact type	Size
51-121.025	Momentary	1NO/1NC	18 x 24mm
51-122.025	Momentary	2NO/2NC	18 x 24mm
51-261.025	Maintained	1NO/1NC	18 x 24mm
51-262.025	Maintained	2NO/2NC	18 x 24mm

For complete switch also order **A**

For complete switch also order **A**

Illuminated pushbutton



Illuminated pushbutton, snap-action, raised, square, black plastic, 16mm mounting, solder terminals, gold over silver contacts


Part No.	Action	Contact type	Size
51-151.025	Momentary	1NO/1NC	18 x 18mm
51-152.025	Momentary	2NO/2NC	18 x 18mm
51-281.025	Maintained	1NO/1NC	18 x 18mm
51-282.025	Maintained	2NO/2NC	18 x 18mm

For complete switch also order **A**

Keylock switch



Keylock switch, 2 position, raised, snap-action, round, black plastic, 18mm Ø, solder terminals, gold over silver contacts




Part No.	Action	Contact type	Size	Drawing	Part No.	Contact type	Key rem.
51-131.025	Momentary	1NO/1NC	18mm Ø	1	51-135.025D	1NO/1NC	A+C
51-132.025	Momentary	2NO/2NC	18mm Ø	1	51-136.025D	2NO/2NC	A+C
51-271.025	Maintained	1NO/1NO	18mm Ø	1	51-235.025D	1NO/1NC	A
51-272.025	Maintained	2NO/2NC	18mm Ø	1	51-335.025D	1NO/1NC	C
				2	51-141.025D	1NO/1NC	A

For complete switch also order **A**


Choose one component from each of the colored sections to assemble a complete switch.
For other options or further information please contact EAO Switch directly.




Keylock switch





Keylock switch, 2 position, raised, snap-action, square, black plastic, 18 x 18mm, solder terminals, gold over silver contacts

1 





Keylock switch, 2 position, raised, snap-action, rectangular, black plastic, 18 x 24mm, solder terminals, gold over silver contacts

1 




Keylock switch, 3 position, raised, snap-action, rectangular, black plastic, 18 x 24mm, solder terminals, gold over silver contacts

3  4 



Drawing	Part No.	Contact type	Key rem.	Drawing	Part No.	Contact type	Key rem.	Drawing	Part No.	Contact type	Key rem.
2	51-145.025D	1NO/1NC	A	1	51-195.025D	1NO/1NC	A+C	3	51-361.022D	2x 1NO/1NC	A
2	51-146.025D	2NO/2NC	A	1	51-196.025D	2NO/2NC	A+C	3	51-362.022D	2x 2NO/2NC	C + A + B
1	51-155.025D	1NO/1NC	A+C	1	51-295.025D	1NO/1NC	A	4	51-364.022D	2x 1NO/1NC	A
1	51-255.025D	1NO/1NC	A	1	51-296.025D	2NO/2NC	A				
1	51-355.025D	1NO/1NC	C	1	51-395.025D	1NO/1NC	C				
				1	51-396.025D	2NO/2NC	C				
				2	51-495.025D	1NO/1NC	A				
				2	51-496.025D	2NO/2NC	A				


Selector switch

LED






Selector switch, 2 position, raised, snap-action, round, black plastic, 18mm Ø, solder terminals, gold over silver contacts

5  6 



Selector switch, 3 position, raised, snap-action, round, black plastic, 18mm Ø, solder terminals, gold over silver contacts

7  8 




LED, T-1 3/4 MG, single chip, 12 Volt and 28 Volt. Also available in 6 Volt, 24 Volt and 48 Volt

Drawing	Part No.	Contact type	Drawing	Part No.	Contact type	Color	Part No.	Voltage
5	52-131.025	1NO/1NC	7	52-571.022A	2x 1NO/1NC	Red	10-2J09.1062	12VAC/DC, 7/14mA
5	52-132.025	2NO/2NC	8	52-572.022A	2x 1NO/1NC	Yellow	10-2J09.1064	12VAC/DC, 7/14mA
6	52-271.025	1NO/1NC				Green	10-2J09.1065	12VAC/DC, 4/7mA
6	52-272.025	2NO/2NC				Blue	10-2J09.1066	12VAC/DC, 7/14mA
						White	10-2J09.1069	12VAC/DC, 7/14mA
						Red	10-2J13.1062	28VAC/DC, 7/14mA
						Yellow	10-2J13.1064	28VAC/DC, 7/14mA
						Green	10-2J13.1065	28VAC/DC, 4/7mA
						Blue	10-2J13.1066	28VAC/DC, 7/14mA
						White	10-2J13.1069	28VAC/DC, 7/14mA

For complete switch also order **A**

For complete switch also order **A**



Choose one component from each of the colored sections to assemble a complete switch.
For other options or further information please contact EAO Switch directly.

A Accessories



Lens, opaque for rectangular pushbutton actuators, not for illumination

Color	Part No.	Size
● Black	51-901.0	18 x 24mm



Lens, front transparent with white diffuser for rectangular indicator and pushbutton actuators

Color	Part No.	Size
● Red	51-903.2	18 x 24mm
● Yellow	51-903.4	18 x 24mm
● Green	51-903.5	18 x 24mm
● Blue	51-903.6	18 x 24mm
○ Clear	51-903.7	18 x 24mm



Lens, opaque for square pushbutton actuators, not for illumination

Color	Part No.	Size
● Black	51-951.0	18 x 18mm

A Accessories



Lens, front transparent with white diffuser for square indicator and pushbutton actuators

Color	Part No.	Size
● Red	51-953.2	18 x 18mm
● Yellow	51-953.4	18 x 18mm
● Green	51-953.5	18 x 18mm
● Blue	51-953.6	18 x 18mm
○ Clear	51-953.7	18 x 18mm



Lens, opaque for round pushbutton actuators, not for illumination

Color	Part No.	Size
● Black	51-931.0	18mm Ø




Lens, front transparent with white diffuser for round indicator and pushbutton actuators

Color	Part No.	Size
● Red	51-933.2	18mm Ø
● Yellow	51-933.4	18mm Ø
● Green	51-933.5	18mm Ø
● Blue	51-933.6	18mm Ø
○ Clear	51-933.7	18mm Ø


51 Indicator

Raised

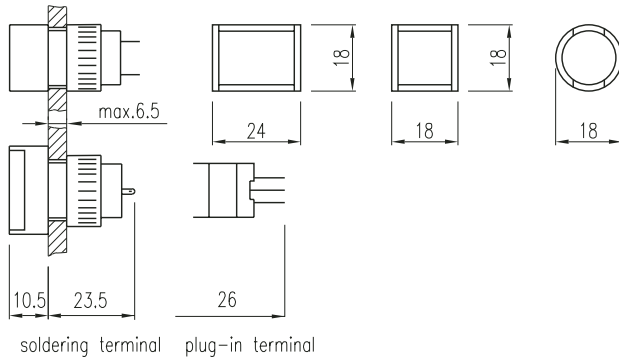

51 Pushbutton


Raised, Round, Square, Rectangular

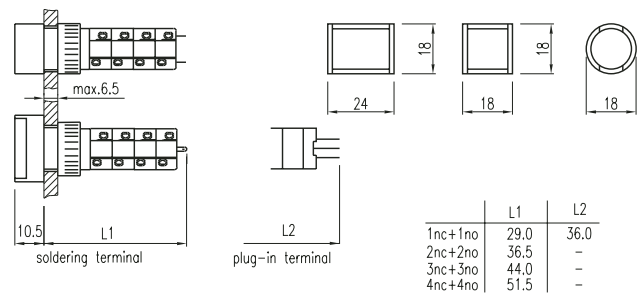

	L1	L2
1nc+1no	29.0	36.0
2nc+2no	36.5	-
3nc+3no	44.0	-
4nc+4no	51.5	-

51 Keylock


Raised, 2-Position, Round, Square, Rectangular

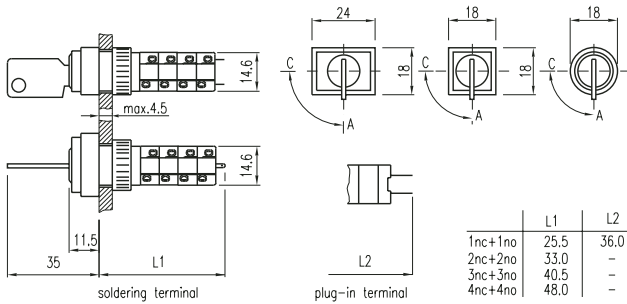

	L1	L2
1nc+1no	25.5	36.0
2nc+2no	33.0	-
3nc+3no	40.5	-
4nc+4no	48.0	-

52 Selector


Raised, 2-Position, Round

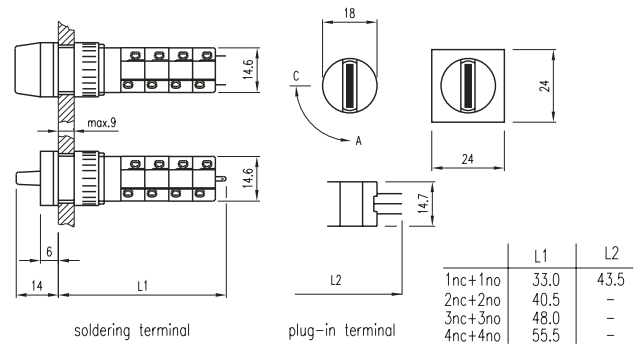

	L1	L2
1nc+1no	33.0	43.5
2nc+2no	40.5	-
3nc+3no	48.0	-
4nc+4no	55.5	-


52 Selector

Raised, 3-Position, Round

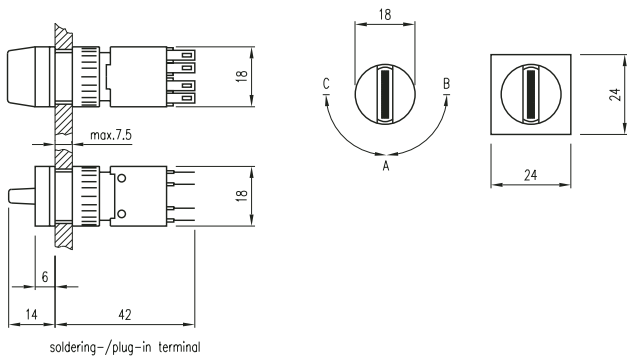


51 Cut-outs

Indicator, Pushbutton, Round, Square, Rectangular

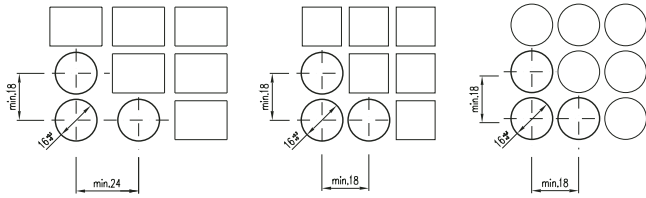

51 Cut-outs

Keylock 2-Position Round, Keylock 2-Position Square, Keylock 2-Position Rectangular, 2 & 3-Position Selector Round

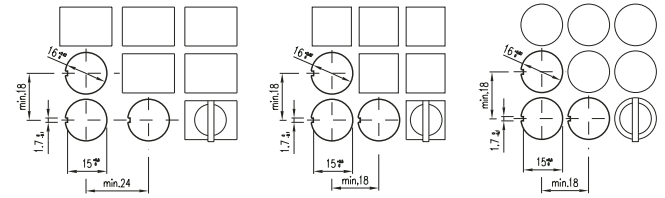



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.