



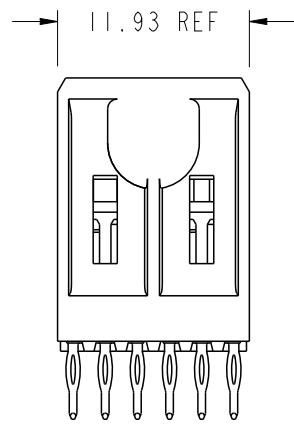

Copyright FCI.

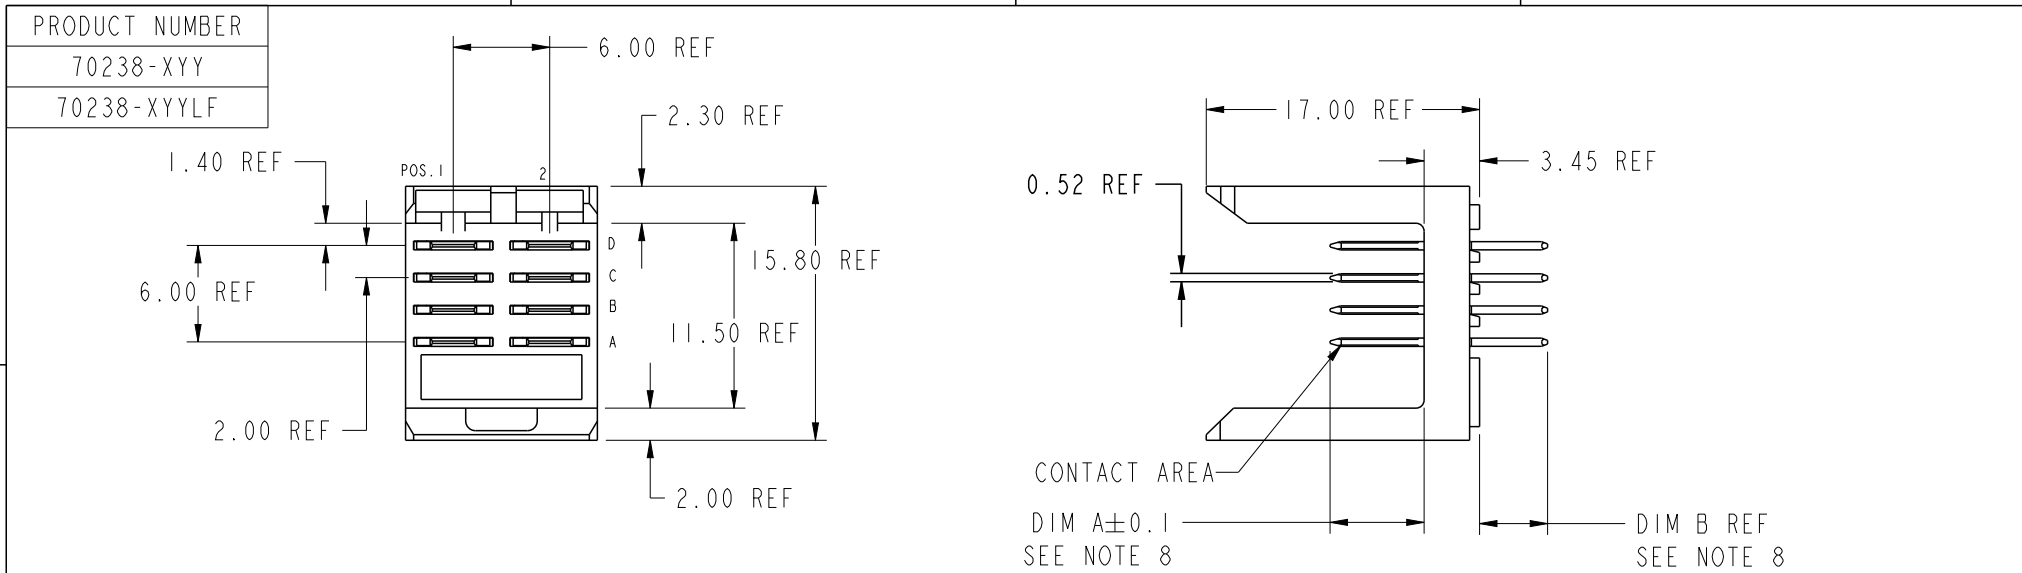

PLATING IN CONTACT AREA		
DASH NUMBER	PERFORMANCE LEVEL	NOTES
-1YY	TELCORDIA CO	-
-2YY	TELECOM CLASS	-
-3YY	IEC CLASS I	-
-5YY	TELCORDIA UE	-
-1YYLF	TELCORDIA CO IEC CLASS I	SEE NOTE 10
-2YYLF	TELECOM CLASS	SEE NOTE 10
-5YYLF	TELCORDIA UE	SEE NOTE 10


rev	ecn no	dr	date
AL	V06-0498	DCH	2006-05-31
AM	DG09-0256	TER	2009-08-19
AN	DG-006740-1	TER	2011-10-08
AP	ELX-DG-009045-1	ANDY	2011-12-20
-	-	-	-
AJ	V04-1147	DAI	11/24/04
AK	V05-0796	DAI	08/19/05

spec ref		*		dr	Terran Huang	2010/07/08	projection	mm	size	A4	scale	11:10
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Andy Lu	2011/12/20			ecn no	ELX-DG-009045-1		
				chr	Tao Huang	2011/12/20						
				appr	Pei-Ming Zheng	2011/12/20						product family
surface 3.200 linear ASME Y14.5		0.X	±0.3		title	METRAL POWER HEADER 1 MOD, 4 ROW PRESS-FIT		dwg no	70238		rev	AP
		0.XX	±0.13									
		0.XXX	±0.050									
angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw			sheet 1 of 6			

PrintE File - REV C - 2009-06-09




Copyright FCI.

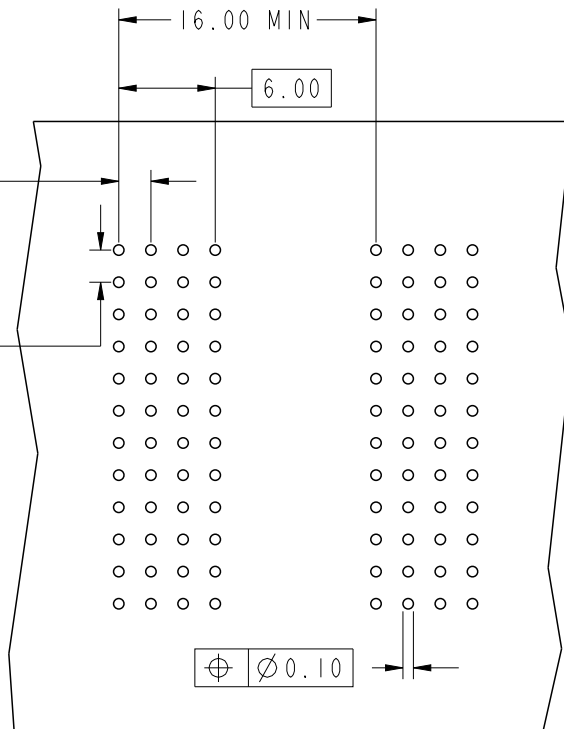

KEY		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	6.50	4.30
2	7.25	4.30
3	8.00	4.30
4	6.50	13.60
5	7.25	13.60
6	8.00	13.60
7	6.50	17.00
8	7.25	17.00
9	8.00	17.00

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

spec ref *				dr Terran Huang2010/07/08		projection 	mm 	size A4	scale 21:10	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng Andy Lu2011/12/20				ecn no ELX-DG-009045-1		
				chr Tao Huang2011/12/20				rel level Released		
				appr Pei-Ming Zheng2011/12/20						
product family						METRAL				
surface 3.200 linear	0.X ±0.3				title METRAL POWER HEADER				dwg no 70238	rev AI
	0.XX ±0.13									
	0.XXX ±.050									
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no. -		Product - Customer Drw			sheet 2 of 6

PrintE File - REV C - 2009-06-09

PDS: Rev :AP

STATUS:Released

Printed: Dec 20, 2011



Copyright FCI.

A

B

C

D

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X01 SEE NOTE 11 LEAD FREE OPTION	D	3	I
	C	3	I
	B	3	I
	A	3	I

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X02 SEE NOTE 11 LEAD FREE OPTION	D	3	2
	C	3	2
	B	3	2
	A	3	2

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X03 SEE NOTE 11 LEAD FREE OPTION	D	2	3
	C	2	3
	B	2	3
	A	2	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X04 SEE NOTE 11 LEAD FREE OPTION	D	3	3
	C	3	3
	B	3	3
	A	2	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X05 SEE NOTE 11 LEAD FREE OPTION	D	I	3
	C	I	3
	B	I	3
	A	I	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X06 SEE NOTE 11 LEAD FREE OPTION	D	I	I
	C	-	2
	B	-	3
	A	3	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X07 SEE NOTE 11 LEAD FREE OPTION	D	2	2
	C	I	I
	B	I	I
	A	3	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X08 SEE NOTE 11 LEAD FREE OPTION	D	2	2
	C	2	2
	B	2	2
	A	3	2

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X09 SEE NOTE 11 LEAD FREE OPTION	D	2	I
	C	2	I
	B	2	I
	A	2	I

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X10 SEE NOTE 11 LEAD FREE OPTION	D	I	2
	C	I	2
	B	I	2
	A	I	2

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X21 SEE NOTE 11 LEAD FREE OPTION	D	6	4
	C	6	4
	B	6	4
	A	6	4

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X22 SEE NOTE 11 LEAD FREE OPTION	D	6	5
	C	6	5
	B	6	5
	A	6	5

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X23 SEE NOTE 11 LEAD FREE OPTION	D	5	6
	C	5	6
	B	5	6
	A	5	6

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X24 SEE NOTE 11 LEAD FREE OPTION	D	6	6
	C	6	6
	B	6	6
	A	5	6

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X25 SEE NOTE 11 LEAD FREE OPTION	D	4	6
	C	4	6
	B	4	6
	A	4	6

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X26 SEE NOTE 11 LEAD FREE OPTION	D	4	4
	C	-	5
	B	-	6
	A	6	6

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X27 SEE NOTE 11 LEAD FREE OPTION	D	5	5
	C	4	4
	B	4	4
	A	6	6

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X28 SEE NOTE 11 LEAD FREE OPTION	D	5	5
	C	5	5
	B	5	5
	A	6	5

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X29 SEE NOTE 11 LEAD FREE OPTION	D	5	4
	C	5	4
	B	5	4
	A	5	4

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X30 SEE NOTE 11 LEAD FREE OPTION	D	4	5
	C	4	5
	B	4	5
	A	4	5

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X31 SEE NOTE 11 LEAD FREE OPTION	D	9	7
	C	9	7
	B	9	7
	A	9	7

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X32 SEE NOTE 11 LEAD FREE OPTION	D	9	8
	C	9	8
	B	9	8
	A	9	8

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X33 SEE NOTE 11 LEAD FREE OPTION	D	8	9
	C	8	9
	B	8	9
	A	8	9

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X34 SEE NOTE 11 LEAD FREE OPTION	D	9	9
	C	9	9
	B	9	9
	A	8	9

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X35 SEE NOTE 11 LEAD FREE OPTION	D	7	9
	C	7	9
	B	7	9
	A	7	9

spec ref *		dr Terran Huang		2010/07/08		projection		mm		size A4		scale 1:10	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng Andy Lu		2011/12/20				ecn no ELX-DG-009045-1		rel level Released	
				chr Tao Huang		2011/12/20							
				appr Pei-Ming Zheng		2011/12/20							
surface 3.200 linear		0.X ±0.3				title METRAL POWER HEADER		dwg no 70238		rev AP			
0.XX ±0.13													
0.XXX ±.050													
ASME Y14.5 angular		0° ±2°		www.fci.com		cat. no.		Product - Customer Drw		sheet 3 of 6			



Copyright FCI.

D

A

B

C

spec ref *		dr Terran Huang		2010/07/08		projection		mm		size A4		scale 1:10	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng Andy Lu		2011/12/20				ecn no ELX-DG-009045-1		rel level Released	
				chr Tao Huang		2011/12/20							
				appr Pei-Ming Zheng		2011/12/20		product family METRAL					
surface 3.200 linear		0.X ±0.3				title METRAL POWER HEADER 1 MOD, 4 ROW PRESS-FIT				dwg no 70238		rev AP	
		0.XX ±0.13											
		0.XXX ±.050											
ASME Y14.5		angular 0° ±2°		www.fci.com		cat. no.		Product - Customer Drw				sheet 4 of 6	

Print File - REV C - 2009-06-09

METRAL P/N	ROW	CONTACT CODE MOD. I	
		1	2
70238-X85 SEE NOTE 11 LEAD FREE OPTION	D	2	3
	C	2	3
	B	2	3
	A	2	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		1	2
70238-X86 SEE NOTE 11 LEAD FREE OPTION	D	1	3
	C	3	3
	B	3	3
	A	3	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		1	2
70238-X87 SEE NOTE 11 LEAD FREE OPTION	D	2	3
	C	2	3
	B	2	1
	A	2	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X88 SEE NOTE 11 LEAD FREE OPTION	D	3	2
	C	3	2
	B	2	3
	A	2	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X89 SEE NOTE 11 LEAD FREE OPTION	D	3	2
	C	3	2
	B	1	3
	A	2	3

Pro/E File - REV C - 2009-06-09

Copyright FCI.

D



Copyright FCI.

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X90 SEE NOTE 11 LEAD FREE OPTION	D	2	3
	C	2	3
	B	2	1
	A	2	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X91 SEE NOTE 11 LEAD FREE OPTION	D	1	1
	C	1	3
	B	3	3
	A	1	1

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X92 SEE NOTE 11 LEAD FREE OPTION	D	-	1
	C	-	1
	B	-	1
	A	-	1

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X93 SEE NOTE 11 LEAD FREE OPTION	D	1	2
	C	2	2
	B	1	3
	A	1	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X94 SEE NOTE 11 LEAD FREE OPTION	D	1	-
	C	1	-
	B	3	-
	A	1	-

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X95 SEE NOTE 11 LEAD FREE OPTION	D	1	-
	C	-	1
	B	1	-
	A	-	1

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X96 SEE NOTE 11 LEAD FREE OPTION	D	3	3
	C	3	2
	B	3	2
	A	3	3

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X97 SEE NOTE 11 LEAD FREE OPTION	D	3	1
	C	2	2
	B	2	2
	A	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I	
		I	2
70238-X98 SEE NOTE 11 LEAD FREE OPTION	D	3	2
	C	3	2
	B	3	3
	A	3	3



NOTES:

- FOR DIM A AND B SEE SHEET 2 AND UP.
- BODY MATERIAL: LIQUID CRYSTAL

POLYMER 30 % GLASS.

FLAME RETARDANT ACC. UL 94-V0.
- PIN MATERIAL:
PHOSPHOR BRONZE.
- PLATING ON PRESS-FIT TAIL:
70238 -XYY IS SnPb
70238-XYLF IS SN (LEAD FREE)
PLATING ON CONTACT AREA CONFORMS TO PERFORMANCE
LEVEL SHOWN IN TABLE.
- PRODUCT MARKING:
PART NUMBER DESIGNATION & BATCH I.D.
- ALL PRODUCTS WITH PART NUMBERS SHOWN IN
SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES.
IF TRAY PACKAGING IS REQUIRED, A SUFFIX "P"
WILL BE ADDED TO THE END OF THE PART NUMBER.
EXAMPLE: XXXXX-XXXP OR XXXXX-XXPLF
- PRODUCT SPECIFICATION GS-12-180
APPLICATION SPECIFICATION BUS-20-073
- AFTER INSERTION INTO CIRCUIT BOARD WITH
QUALIFIED TOOL.
- A PLATING HAS Au FLASH IN PRESS FIT
AREA (LEAD FREE).
- THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE
EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS
AS DESCRIBED IN GS-22-008.
- FOR LEAD FREE PART NUMBERS, ADD AN "LF" SUFFIX.
FOR EXAMPLE: 70238-X01LF
- ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS
IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

spec ref		*		dr	Terran Huang	2010/07/08	projection		mm	size	A4	scale	11:10		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Andy Lu	2011/12/20						ecn no	ELX-DG-009045-1		
				chr	Tao Huang	2011/12/20							product family	METRAL	rel level
				appr	Pei-Ming Zheng	2011/12/20									
surface	3.200 linear	0.X	±0.3		title	METRAL POWER HEADER 1 MOD, 4 ROW PRESS-FIT			dwg no	70238			rev	AP	
		0.XX	±0.13												
		0.XXX	±.050												
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw				sheet 6 of 6				

Prod File - REV C - 2009-06-09

PDS: Rev :AP

STATUS:Released

Printed: Dec 20, 2011



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.