




# Series 152, 156, and 157 In-Line Jumpers on 0.100 [2.54] Centers

## FEATURES

- Au-plated End Connectors with Solid Brass Pins on 0.100 [2.54] Centers
- Available Single-ended (Series 156), Double-ended (Series 157), or Bare-ended (Series 152)
- Reliable, Electronically-tested Solder Connections
- Easy Identification and Tracing with 10-color Cable

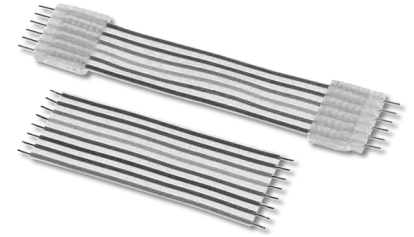

## GENERAL SPECIFICATIONS

- **HOUSING:** natural UL 94-HB Nylon 6/6
- **HEADER PINS:** Brass, 1/2-hard
- **PIN PLATING:** 10μ [0.25μ] min. Au per MIL-G-45204 over 50μ [1.27μ] min. Ni per SAE AMS-QQ-N-290B
- **CABLE INSULATION:** UL Style 1061 Polyvinyl Chloride (PVC), semi-rigid
- **LAMINATE:** clear PVC, Self-extinguishing
- **CONDUCTORS:** 26-AWG, 7/34-strand, tinned Cu per ASTM B 33 Series 152 Conductors are not pre-tinned. Consult factory for pre-tinned, bare-ended jumpers
- **CABLE CURRENT RATING:** 1 amp at 10°C [50°F] above ambient
- **CABLE VOLTAGE RATING:** 300V
- **CABLE TEMPERATURE RATING:** 176°F [80°C]

## ORDERING INFORMATION

**XX-XXX-XXX**

Series  
 156 = Single-ended\*  
 157 = Double-ended\*  
 152 = Bare-ended


Cable Length "L" (inches)  
 1.00" = 001 (min)  
 1.25" = 001.25  
 1.50" = 001.5  
 Etc.

No. of Conductors  
 (4 thru 8)

\* Not Available in RoHS

## MOUNTING CONSIDERATIONS

- **SUGGESTED PCB HOLE SIZE:** 0.033 ±0.002 [0.86 ±0.05] dia.

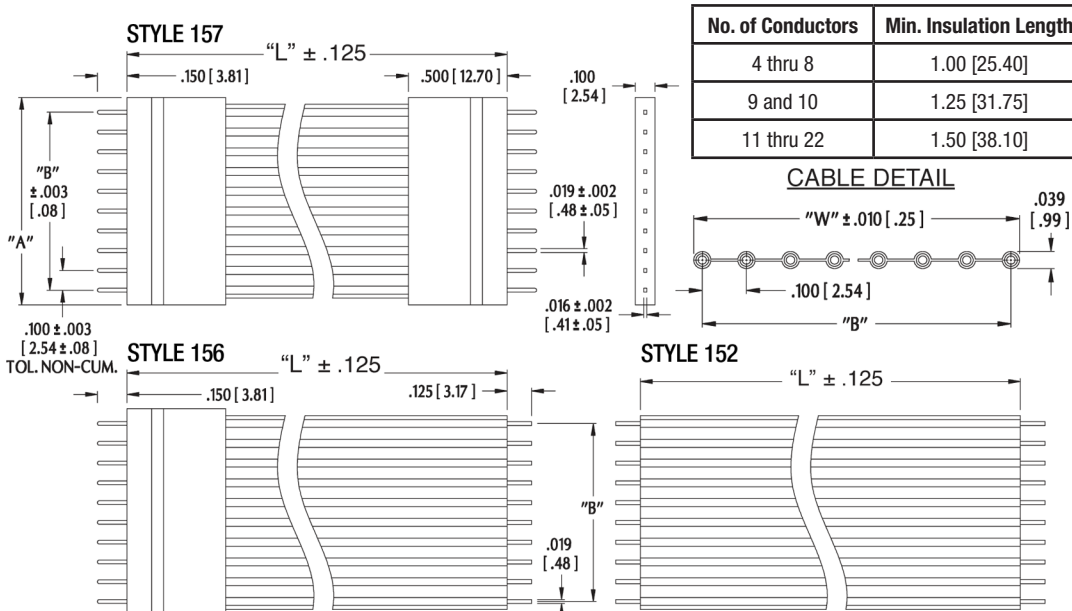

"A" = (NO. OF CONDUCTORS x 0.100 [2.54]) + 0.040 [1.02]  
 "B" = (NO. OF CONDUCTORS - 1) x 0.100 [2.54]  
 "W" = (NO. OF CONDUCTORS x 0.100 [2.54]) - 0.020 [0.51]

ALL DIMENSIONS: INCHES [MILLIMETERS]  
 ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED  
 FOR PRE-TINNED, BARE-ENDED JUMPERS, CONSULT FACTORY  
 CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.  
 ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE  
 PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



2609 Bartram Road • Bristol, PA 19007-6810 USA  
 TEL 215-781-9956 • FAX 215-781-9845  
 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.