

100-POE-SPL PoE Splitter

N-Tron® Networking Series



▶▶▶ PoE Splitter

The N-Tron 100-POE-SPL is a Power over Ethernet splitter designed to accept Ethernet with PoE via Cat5 cable and output power via terminal block and Ethernet via RJ45.

This allows devices which are not PoE capable to be connected and powered by a Cat5 cable. The 100-POE-SPL also allows legacy devices which are not PoE capable to be deployed without the need to provide a dedicated power supply. The 100-POE-SPL is ideal for use with N-Tron's 105TX-POE, 105FX-POE, 100-POE4 or other PoE sourcing equipment. The 100-POE-SPL can be ordered with 12, 24, or 48 volt DC output.



APPLICATIONS

- > Factory Automation
- > Utilities
- > SCADA
- > Security Surveillance
- > Transportation
- > Alternative Energy

PRODUCT HIGHLIGHTS

- > Compact, Industrial Design
- > Up to 5 port connections
- > High Environmental Specifications
- > N-Ring Advanced Ring Technology
- > Increased Networking Performance
- > Plug-and-Play Operation

FEATURES & BENEFITS

- > Compact, Space Saving Package
- > IEEE 802.3af Compliant
- > One RJ-45 PoE Port (Data & Power In)
- > One RJ-45 Port (Data Out)
- > Unmanaged Operation
- > Extended Environmental Specifications
 - -40°C to 85°C Operating Temperature
- > Supports up to 15.4 Watts (Cable and PSE Dependent)
- > Full Wire Speed Communications
- > Built in Transient Voltage Suppression
- > Power Status LED
- > Hardened Metal DIN-Rail Enclosure

industrial
networking



Industrial Unmanaged Ethernet Switch Specifications

SWITCH PROPERTIES

Compact, Space Saving Package
IEEE 802.3af Compliant
One RJ-45 PoE Port (Data & Power In)
One RJ-45 Port (Data Out)
Unmanaged Operation
Extended Environmental Specifications
-40°C to 85°C Operating Temperature
Supports up to 15.4 Watts (Cable and PSE Dependent)
Full Wire Speed Communications
Built in Transient Voltage Suppression
Power Status LED
Hardened Metal DIN-Rail Enclosure

POWER INPUT

Input Voltage: 46-54 VDC
Steady Output Current Under Full Load: 320 mA@48VDC
Steady Input Current Under No Load: 10 mA@48V

CONNECTORS

10/100BaseTX: Two (2) RJ45 copper ports

NETWORK MEDIA

10BaseT: >Cat3 cable
100BaseTX: >Cat5 cable

RECOMMENDED WIRING CLEARANCE

Front: 2" (5.08 cm)
Top: 1" (2.54 cm)

CERTIFICATION & COMPLIANCE

Product Safety: UL/cUL: Class I, Division 2, Groups A, B, C and D;
T4 UL 508, ICE and ANSI/ISA-12.12.01-2007
Emissions: EN 55011, ICES-003, FCC/CE (CFR 47, Part 15,
Subpart B, Class A)
Immunity: EN 61000-6-2/4, IEC 61000-4-2/3/4/5/6
Other: ABS type approval for shipboard applications
DNV Type Approval Certification
RoHS Compliant
IEEE 1613 for Electric Utility Substations
NEMA TS1/TS2 for Traffic Control


ENVIRONMENTAL

Operating Temperature: -40°C to 85°C

MECHANICAL

Case Dimensions
Height: 4" (10.2 cm)
Width: 1.0" (2.6 cm)
Depth: 3.7 (9.3 cm)
Depth (incl. DIN rail mount): 3.9" (9.8 cm)
Weight (max): 0.60 lbs. (0.27 kg)
Mount: DIN Rail 35mm

DIMENSIONS

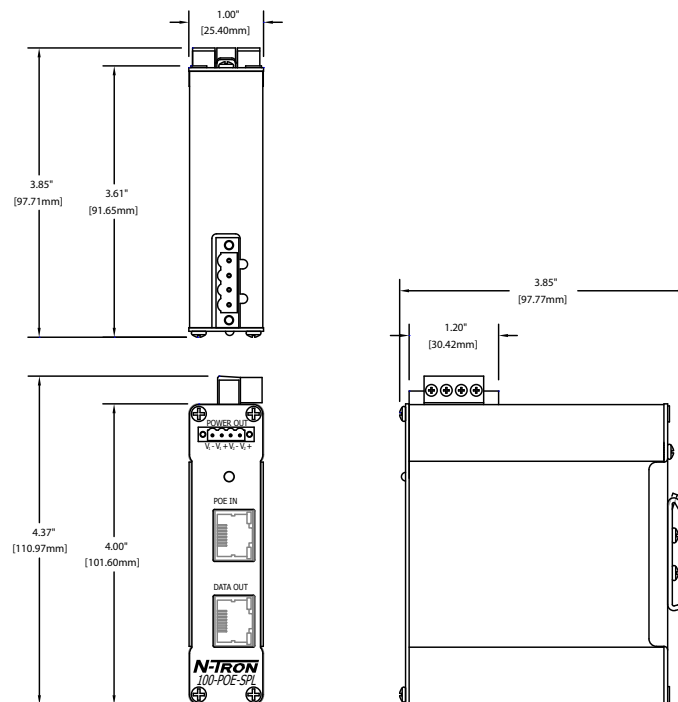

All specifications are subject to change. Consult the company website for more information.

ORDERING GUIDE

PART NUMBER	DESCRIPTION
100-POE-SPL-12	Ethernet PoE splitter, 12VDC output
100-POE-SPL-24	Ethernet PoE splitter, 24VDC output
100-POE-SPL-48	Ethernet PoE splitter, 48VDC output
100-POE-SPL-XX	Ethernet PoE splitter, Custom VDC output*

*Call for pricing



www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

Europe
Middle East
Africa
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0327 040616 © 2016 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.