

# CBT-140 White LEDs



## Table of Contents

Technology Overview .....2

Test Specifications .....2

Binning Structure .....3

Chromaticity Bins .....4

Ordering Information .....6

Bin Kit Order Codes.....7

Shipping and Labeling .... 8

Electrical Characteristics . 10

Thermal Resistance ..... 13

Mechanical Dimensions .. 14

Tray Outline ..... 15

Packing and Shipping Specification..... 16

History of Changes..... 17

## Features:

- Extremely high optical output from a 14 mm<sup>2</sup> circular source: Up to 5,000 white lumens
- Round emitting aperture provides most efficient match to circular optical systems and narrow beam projectors
- Unencapsulated package preserves small etendue facilitating narrow beam optical system design
- Chip on board package assures straightforward system assembly with the best possible thermal performance for high power devices.
- Integrated thermistor enables consistent temperature monitoring during operation for high system reliability
- High thermal conductivity package - junction to heat sink thermal resistance less than 0.25°C/W
- Variable drive current: 1 A to 28A
- High CRI (92 typical) Daylight color temperatures for natural lighting
- Environmentally friendly: RoHS compliant

## Applications

- Architectural and Entertainment Lighting
- Fiber-coupled Illumination
- Medical Lighting
- Machine Vision
- Microscopy
- Spot Lighting

## Technology Overview

Luminus LEDs™ benefit from a suite of innovations in the fields of chip technology, packaging and thermal management. These breakthroughs allow illumination engineers and designers to achieve solutions that are high brightness and high efficiency.

### Monolithic Large Chip Technology

Luminus' technology enables large area LED chips with uniform brightness over the entire LED chip surface. The optical power and brightness produced by these large monolithic chips enable solutions which replace arc and halogen lamps where arrays of traditional high power LEDs cannot.

### Packaging Technology

Thermal management is critical in high power LED applications. With a thermal resistance from junction to board of 0.25° C/W, Luminus CBT-140 LEDs have the lowest thermal resistance of any LED on the market. This allows the LED to be driven at higher current densities while maintaining a low junction temperature, thereby resulting in brighter solutions and longer lifetimes.

### Reliability

Designed from the ground up, Luminus LEDs are one of the most reliable light sources in the world today. LEDs have passed a rigorous suite of environmental and mechanical stress tests, including mechanical shock, vibration, temperature cycling and humidity, and have been fully qualified for use in extreme high power and high current applications. With very low failure rates and median lifetimes that typically exceed 60,000 hours, Luminus LEDs are ready for even the most demanding applications.

### Environmental Benefits

Luminus LEDs help reduce power consumption and the amount of hazardous waste entering the environment. All LED products manufactured by Luminus are RoHS compliant and free of hazardous materials, including lead and mercury.

## Understanding Luminus LED Test Specifications

Every LED is fully tested to ensure that it meets the high quality standards expected from Luminus products.

### Testing Temperature

Luminus core board products are typically measured in such a way that the characteristics reported agree with how the devices will actually perform when incorporated into a system. This measurement is accomplished by mounting the devices on a 40°C heat sink and allowing the device to reach thermal equilibrium while fully powered. Only after the device reaches equilibrium are the measurements taken. This method of measurement ensures that Luminus LEDs perform in the field just as they are specified.

Expected flux values in real world operation can be extrapolated based on the information contained within this product data sheet.

### Multiple Operating Points

The tables on the following pages provide typical optical and electrical characteristics. Since the LEDs can be operated over a wide range of drive conditions (currents from 1A to 28.0A, and duty cycles from <1% to 100%), multiple drive conditions may be listed.

CBT-140 White LEDs are production tested at 21.0 A.

### CBT-140 White Binning Structure

CBT-140 white LEDs are tested for luminous flux and chromaticity at a drive current of 21.0 A (1.5 A/mm<sup>2</sup>) and placed into one of the following luminous flux (FF) and chromaticity (WW) bins:

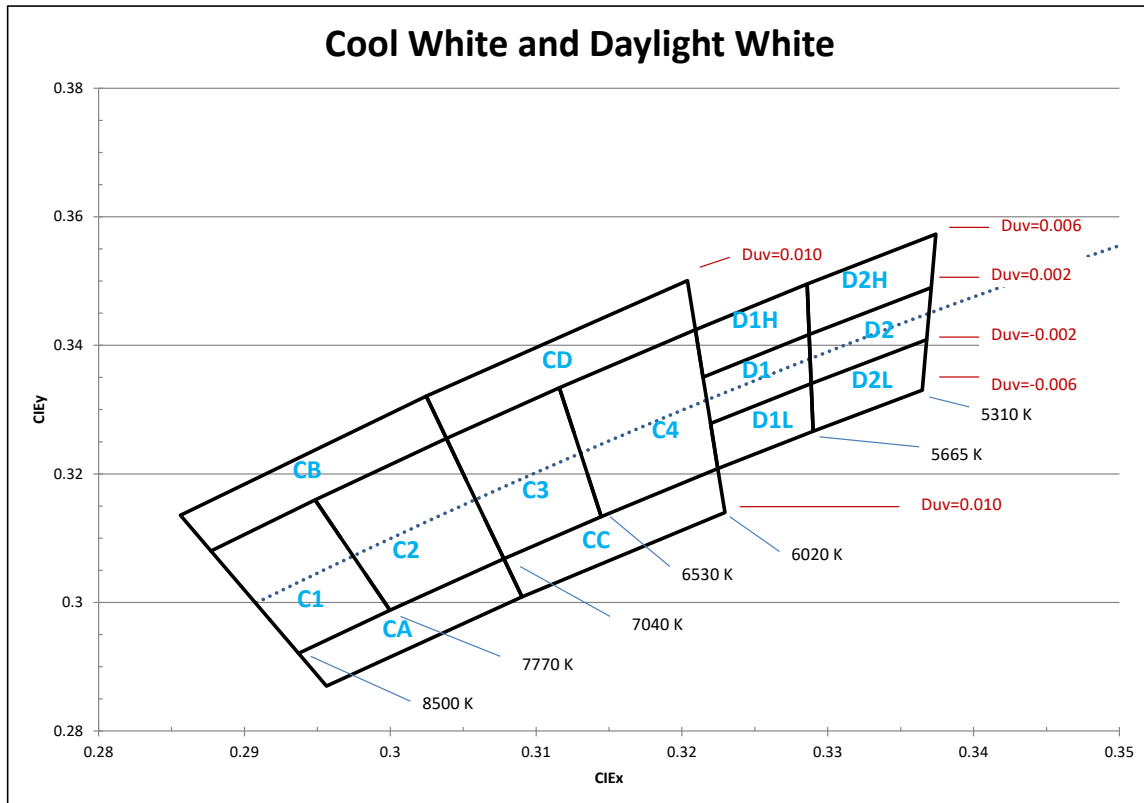
#### Flux Bins

| Color   | Flux Bin (FF) | Minimum Flux (lm) at 21.0A | Maximum Flux (lm) at 21.0A |
|---|---------------|----------------------------|----------------------------|
| WCS (7500K-6500K, 70CRI)<br>WDH (5700K 92CRI) | XA            | 5,590                      | 6,011                      |
|   | WB            | 5,225                      | 5,590                      |
|   | WA            | 4,860                      | 5,225                      |
|   | VB            | 4,545                      | 4,860                      |
|   | VA            | 4,230                      | 4,545                      |
|   | UB            | 3,955                      | 4,230                      |
|   | UA            | 3,680                      | 3,955                      |
|   | TB            | 3,440                      | 3,680                      |
|   | TA            | 3,200                      | 3,440                      |
|   | SB            | 2,990                      | 3,200                      |
|   | SA            | 2,780                      | 2,990                      |
|   | RB            | 2,600                      | 2,780                      |
|   | RA            | 2,420                      | 2,600                      |
|   | QB            | 2,260                      | 2,420                      |
| QA  | 2,100         | 2,260                      |                            |

\*Note: Luminus maintains a +/- 6% tolerance on flux measurements.

Luminus maintains a +/- 2% tolerance on CRI measurements.

### Chromaticity Bins



**CBT-140 White Chromaticity Bins**

The following tables describe the four chromaticity points that bound each chromaticity bin. Chromaticity bins are grouped together based on the color temperature.

| Cool White Chromaticity Bins |                  |                  |
|------------------------------|------------------|------------------|
| Bin Code(WW)                 | CIE <sub>x</sub> | CIE <sub>y</sub> |
| C1                           | 0.293            | 0.292            |
|                              | 0.299            | 0.298            |
|                              | 0.294            | 0.315            |
|                              | 0.287            | 0.307            |
| C2                           | 0.299            | 0.298            |
|                              | 0.307            | 0.306            |
|                              | 0.303            | 0.325            |
|                              | 0.294            | 0.315            |
| C3                           | 0.307            | 0.306            |
|                              | 0.314            | 0.313            |
|                              | 0.311            | 0.333            |
|                              | 0.303            | 0.325            |
| C4                           | 0.314            | 0.313            |
|                              | 0.322            | 0.32             |
|                              | 0.32             | 0.342            |
|                              | 0.311            | 0.333            |
| CA                           | 0.293            | 0.292            |
|                              | 0.295            | 0.287            |
|                              | 0.309            | 0.300            |
|                              | 0.307            | 0.306            |
| CB                           | 0.287            | 0.307            |
|                              | 0.285            | 0.313            |
|                              | 0.302            | 0.332            |
|                              | 0.303            | 0.325            |
| CC                           | 0.307            | 0.306            |
|                              | 0.309            | 0.300            |
|                              | 0.322            | 0.313            |
|                              | 0.322            | 0.320            |
| CD                           | 0.303            | 0.325            |
|                              | 0.302            | 0.332            |
|                              | 0.320            | 0.350            |
|                              | 0.320            | 0.342            |

| Daylight Chromaticity Bins |                  |                  |
|----------------------------|------------------|------------------|
| Bin Code(WW)               | CIE <sub>x</sub> | CIE <sub>y</sub> |
| D1                         | 0.321            | 0.327            |
|                            | 0.321            | 0.335            |
|                            | 0.328            | 0.341            |
|                            | 0.328            | 0.334            |
| D2                         | 0.328            | 0.334            |
|                            | 0.328            | 0.341            |
|                            | 0.337            | 0.348            |
|                            | 0.336            | 0.340            |
| D1H                        | 0.321            | 0.335            |
|                            | 0.320            | 0.342            |
|                            | 0.328            | 0.349            |
|                            | 0.328            | 0.341            |
| D2H                        | 0.328            | 0.341            |
|                            | 0.328            | 0.349            |
|                            | 0.337            | 0.357            |
|                            | 0.337            | 0.348            |
| D1L                        | 0.321            | 0.327            |
|                            | 0.322            | 0.320            |
|                            | 0.328            | 0.326            |
|                            | 0.328            | 0.334            |
| D2L                        | 0.328            | 0.334            |
|                            | 0.328            | 0.326            |
|                            | 0.336            | 0.333            |
|                            | 0.336            | 0.340            |

### Ordering Information

| Products    | Ordering Part Number  | Description   |
|-------------|-----------------------|---|
| CBT-140-WCS | CBT-140-WCS-L16-xx123 | Monolithic LED with 14 mm <sup>2</sup> circular emission area, un-encapsulated and integrated on a common anode copper-core PCB |
| CBT-140-WDH | CBT-140-WDH-L16-xx123 |   |

### Part Number Nomenclature

CBT — 140 — <ABC> — L16 — <FF###>

| Product Family                            | LED Emission Area         | Color   | Package Configuration  | Bin kit  |
|---|---------------------------|---|--|--|
| CBT: Copper-core PCB,<br>No Encapsulation | 140: 14.0 mm <sup>2</sup> | <A>: Color<br>W = White<br><B> : Temperature<br>C = Cool White<br>D = Daylight White<br><C> : Color Rendering Index<br>S = Standard<br>H = High CRI | L16: 28 mm x 26.75 mm<br>- Common Anode Package, counter-bores | Flux and Chromaticity bin kit code - See available ordering codes next pages |

#### Examples

QB220 - denotes a bin kit comprising of all flux bins with a minimum flux of 2,260 lumens and chromaticity bins at daylight white color point.

QA720 - denotes a bin kit comprising of all flux bins with a minimum flux of 2,100 lumens and chromaticity bins at tungsten white color point.

### CBT-140 Bin Kit Order Codes

The following tables describe the bin kit ordering codes available for the CBT-140 product family. Each bin kit specifies a minimum flux as well as specific chromaticity bins allowed. Please note that within each kit a maximum flux is not specified and as a result Luminus may ship any part meeting or exceeding the minimum flux specification. Shipments will always meet the listed chromaticity bins. For information on ordering bin kits not listed below, please contact Luminus or an official distributor.

#### CBT-140 Cool White Bin Kit Order Codes

| Color                       | Luminous Flux     |           | Chromaticity Bins              | Kit Number |
|-----------------------------|-------------------|-----------|--------------------------------|------------|
|                             | Bin Kit Flux Code | Min. Flux |                                |            |
| WCS<br>7500K-6500K<br>70CRI | TB                | 3,440     | C1, C2, C3, C4, CA, CB, CC, CD | TB120      |
|                             |                   |           | C1, C2, C3, C4                 | TB121      |
|                             |                   |           | C3, C4                         | TB122      |
|                             |                   |           | C1, C2                         | TB123      |
|                             | UA                | 3,680     | C1, C2, C3, C4, CA, CB, CC, CD | UA120      |
|                             |                   |           | C1, C2, C3, C4                 | UA121      |
|                             |                   |           | C3, C4                         | UA122      |
|                             |                   |           | C1, C2                         | UA123      |

**CBT-140 Daylight White Bin Kit Order Codes**

| Color  | Luminous Flux     |           | Chromaticity Bins          | Kit Number |
|--|-------------------|-----------|----------------------------|------------|
|  | Bin Kit Flux Code | Min. Flux |                            |            |
| WDH<br>Daylight white,<br>High CRI (typ. 92) | QA                | 2,100     | D1, D2, D1H, D2H, D1L, D2L | QA220      |
|  | QB                | 2,260     | D1, D2, D1H, D2H, D1L, D2L | QB220      |
|  | RA                | 2,420     | D1, D2, D1H, D2H, D1L, D2L | RA220      |



## Product Shipping & Labeling Information

All CBT-140 products are packaged and labeled with their respective bin as outlined in the tables and charts on pages 3, 4, & 5. When shipped, each package will only contain one bin. The part number designation is as follows:

### CBT-140 White

**CBT** — **140** — **WNX** — **L16** — **FF** — **WW**

| Product Family              | Chip Area                 | Color                           | Package Configuration | Flux Bin            | Chromaticity Bin      |
|-----------------------------|---------------------------|---------------------------------|-----------------------|---------------------|-----------------------|
| CBT: Chip on Board (window) | 140: 14.0 mm <sup>2</sup> | Color & CRI<br>See Note 1 below | Internal Code         | See page 3 for bins | See page 4-5 for bins |

Note 1: WNX nomenclature corresponds to the following:

W = White

N = color, where:

C corresponds to Cool White,

D corresponds to Daylight White.

X = color rendering index, where:

S (Standard) corresponds to a typical CRI of 75

H (high) corresponds to a typical CRI of 92

#### Example :

The part label CBT-140-WDH-L16-RA-D1 refers to a Daylight high CRI white, CBT-140 emitter, with a flux range from 2,420 to 2,600 lumens and a

**CBT-140 White Electrical Characteristics<sup>1</sup>**
**Optical and Electrical Characteristics**

| Drive Condition <sup>2</sup> |                    | 21.0 A Continuous       |                   |
|------------------------------|--------------------|-------------------------|-------------------|
| Parameter                    | Symbol             | Values at Test Currents | Unit              |
| Current Density              | j                  | 1.5                     | A/mm <sup>2</sup> |
| Forward Voltage              | V <sub>F,min</sub> | 3.4                     | V                 |
|                              | V <sub>F,typ</sub> | 3.6                     | V                 |
|                              | V <sub>F,max</sub> | 4.2                     | V                 |

**Common Characteristics**

| Parameter                               | Symbol         | Typical Values | Unit            |
|---|----------------|----------------|-----------------|
| Emitting Area                           |                | 14.0           | mm <sup>2</sup> |
| Color Rendering Index (Typical)         | Cool White     | CRI            | 75              |
|   | Daylight White | CRI            | 92              |
| Forward Voltage Temperature Coefficient |                | -5.47          | mV/°C           |

**Absolute Maximum Ratings**

| Parameter                                 | Symbol             | Values   | Unit |
|---|--------------------|----------|------|
| Minimum Drive Current <sup>7</sup>        |                    | 0.2      | A    |
| Maximum Current <sup>5</sup>              |                    | 28.0     | A    |
| Maximum Junction Temperature <sup>6</sup> | T <sub>J,max</sub> | 150      | °C   |
| Storage Temperature Range                 |                    | -40/+100 | °C   |

Note 1: Ratings are based on operation with a constant junction temperature of T<sub>j</sub> = 85°C.

Note 2: Listed drive conditions are typical for common applications. CBT-140 white devices can be driven at currents ranging from 1A to 28A and at duty cycles ranging from 1% to 100%. Drive current and duty cycle should be adjusted as necessary to maintain the junction temperature desired to meet application lifetime requirements.

Note 3: Unless otherwise noted, values listed are typical.

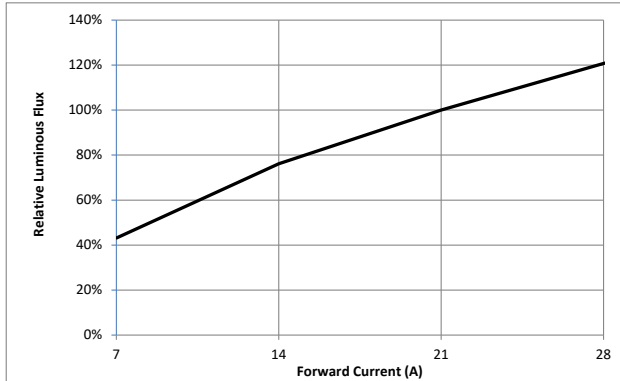
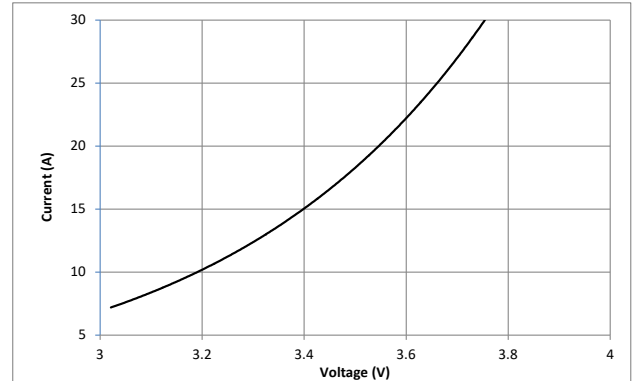
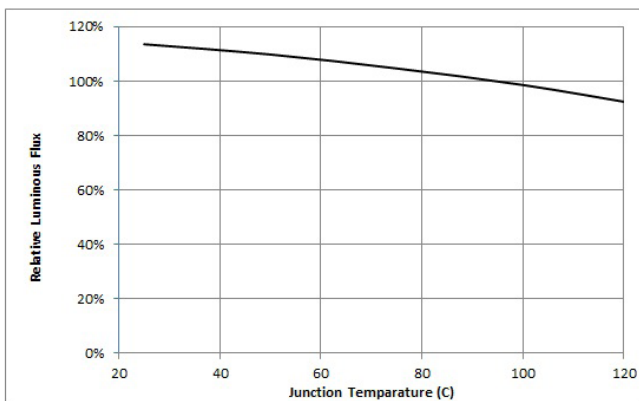
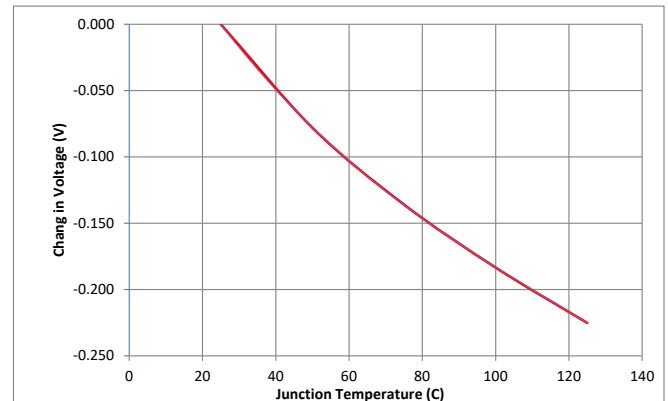
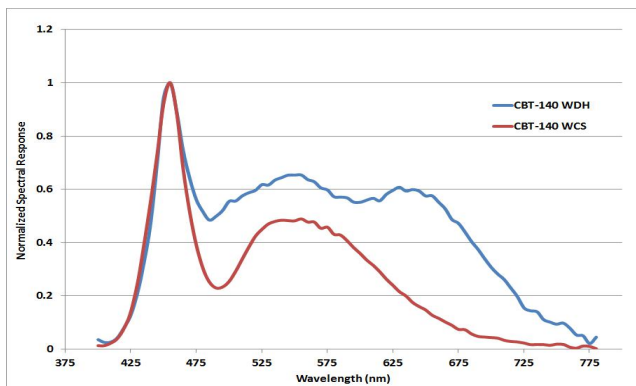
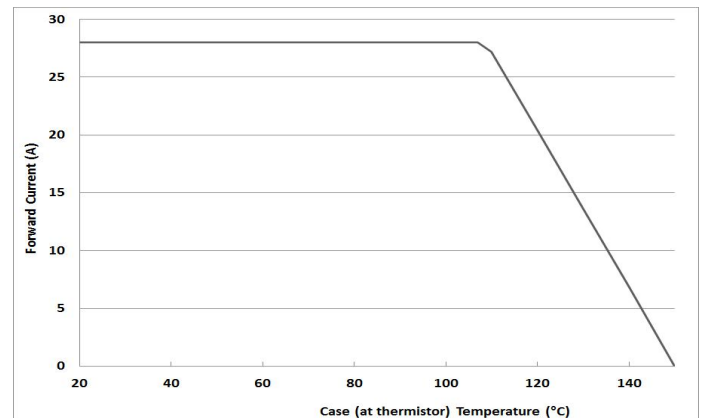
Note 4: CCT value based off of CIE measurement. CIE X and CIE Y measurement uncertainty for white devices is estimated to be +/- 0.01.

Note 5: CBT-140 White LEDs are designed for operation to an absolute maximum forward drive current density of 2.0A/mm<sup>2</sup>. Product lifetime data is specified at recommended forward drive currents. Sustained operation at absolute maximum currents will result in a reduction of device lifetime compared to recommended forward drive currents. Actual device lifetimes will also depend on junction temperature. Refer to the lifetime derating curves for further information. In pulsed operation, rise time from 10-90% of forward current should be larger than 0.5 microseconds.

Note 6: Lifetime dependent on LED junction temperature. Input power and thermal system must be properly managed to ensure lifetime. See charts on pg 12 for further information.

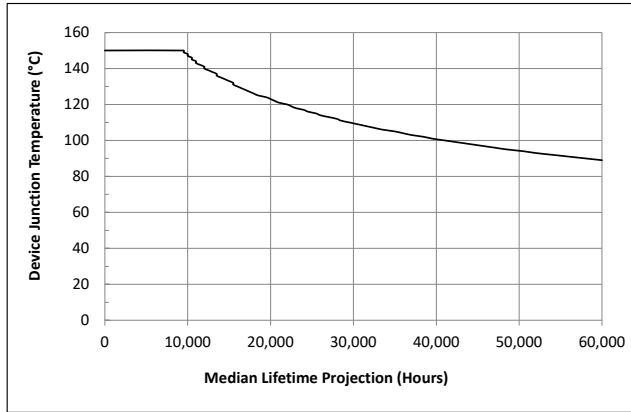
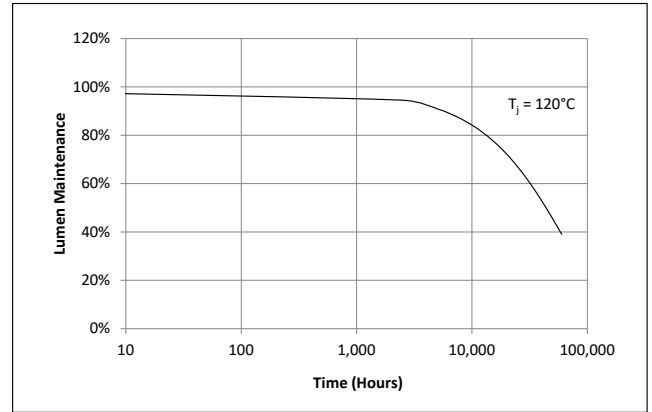
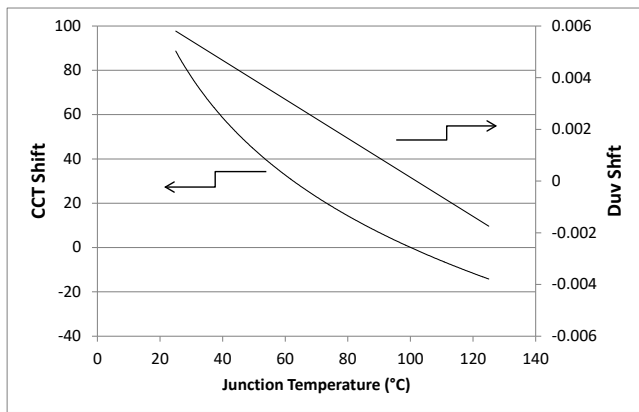
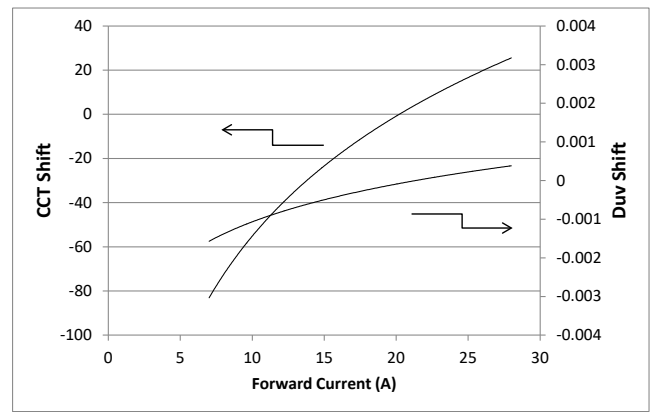
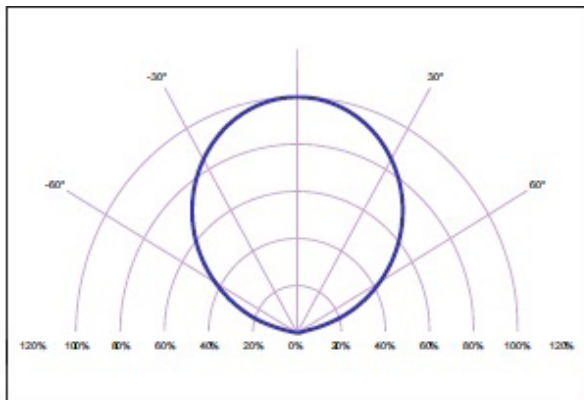
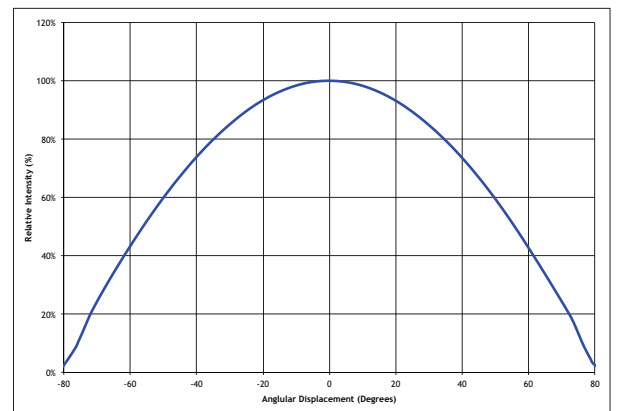
Note 7: Special design considerations must be observed for operation under 1 A. Please contact Luminus for further information.

Note 8: Caution must be taken not to stare at the light emitted from these LEDs. Under special circumstances, the high intensity could damage the eye.

**CBT-140 White Optical & Electrical Characteristics**
**Relative Output Flux vs. Forward Current**

**Forward Current vs. Forward Voltage**

**Relative Output Flux vs. Junction Temp**

**Change in Voltage vs. Junction Temp**

**Typical Spectrum<sup>1</sup>**

**Current Derating Curve<sup>2</sup>**


Note 1: Typical spectrum at current density of 1.5 A/mm<sup>2</sup> in continuous operation.

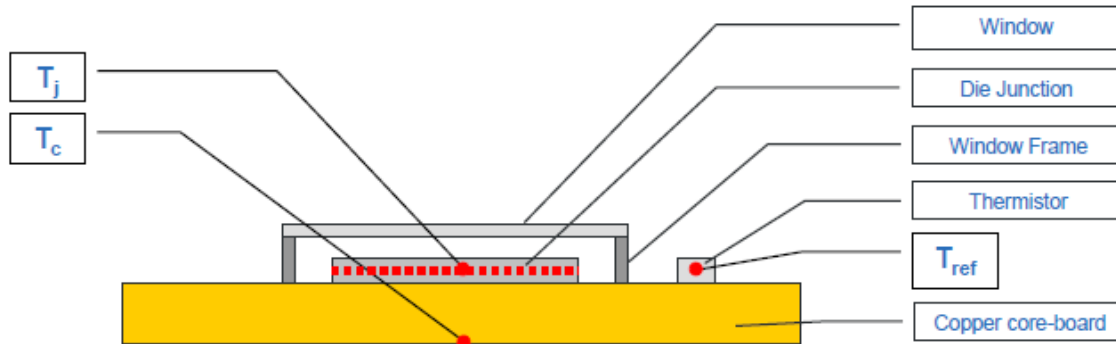
Note 2: Maximum drive current to comply with maximum junction temperature in continuous mode. Junction temperature should be maintained at level compatible with lifetime desired with may require further current de-rating

**CBT-140 White Optical & Electrical Characteristics**
**Median Lifetime<sup>2</sup>**

**Lumen Maintenance vs. Time<sup>3</sup>**

**Chromaticity Change vs. Junction Temp**

**Chromaticity Change vs. Forward Current**

**Typical Polar Radiation Pattern**

**Typical Angular Radiation Pattern**


Note 2: Median expected lifetime in dependence of junction temperature at 1.5 A/mm<sup>2</sup> in continuous operation. Lifetime defined as time to 70% of initial intensity. Based on lifetime test data. Data can be used to model failure rate over typical product lifetime (contact Luminus for lifetime reliability test data for 1A/mm<sup>2</sup> condition).

Note 3: Lumen maintenance in dependence of time at 1.5 A/mm<sup>2</sup> in continuous operation with junction temperatures of 120 °C.

### Thermal Resistance



#### Typical Thermal Resistance

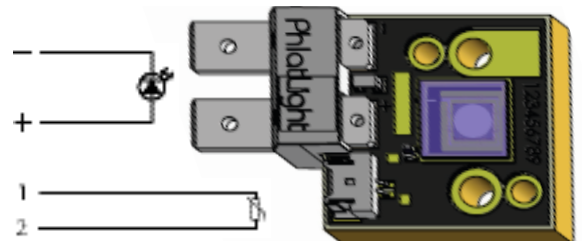
|                         |           |
|-------------------------|-----------|
| $R_{j-c}^{-1}$          | 0.30 °C/W |
| $R_{j-ref}^{-1}$        | 0.33 °C/W |
| $Electrical_{j-c}^{-1}$ | 0.25 °C/W |

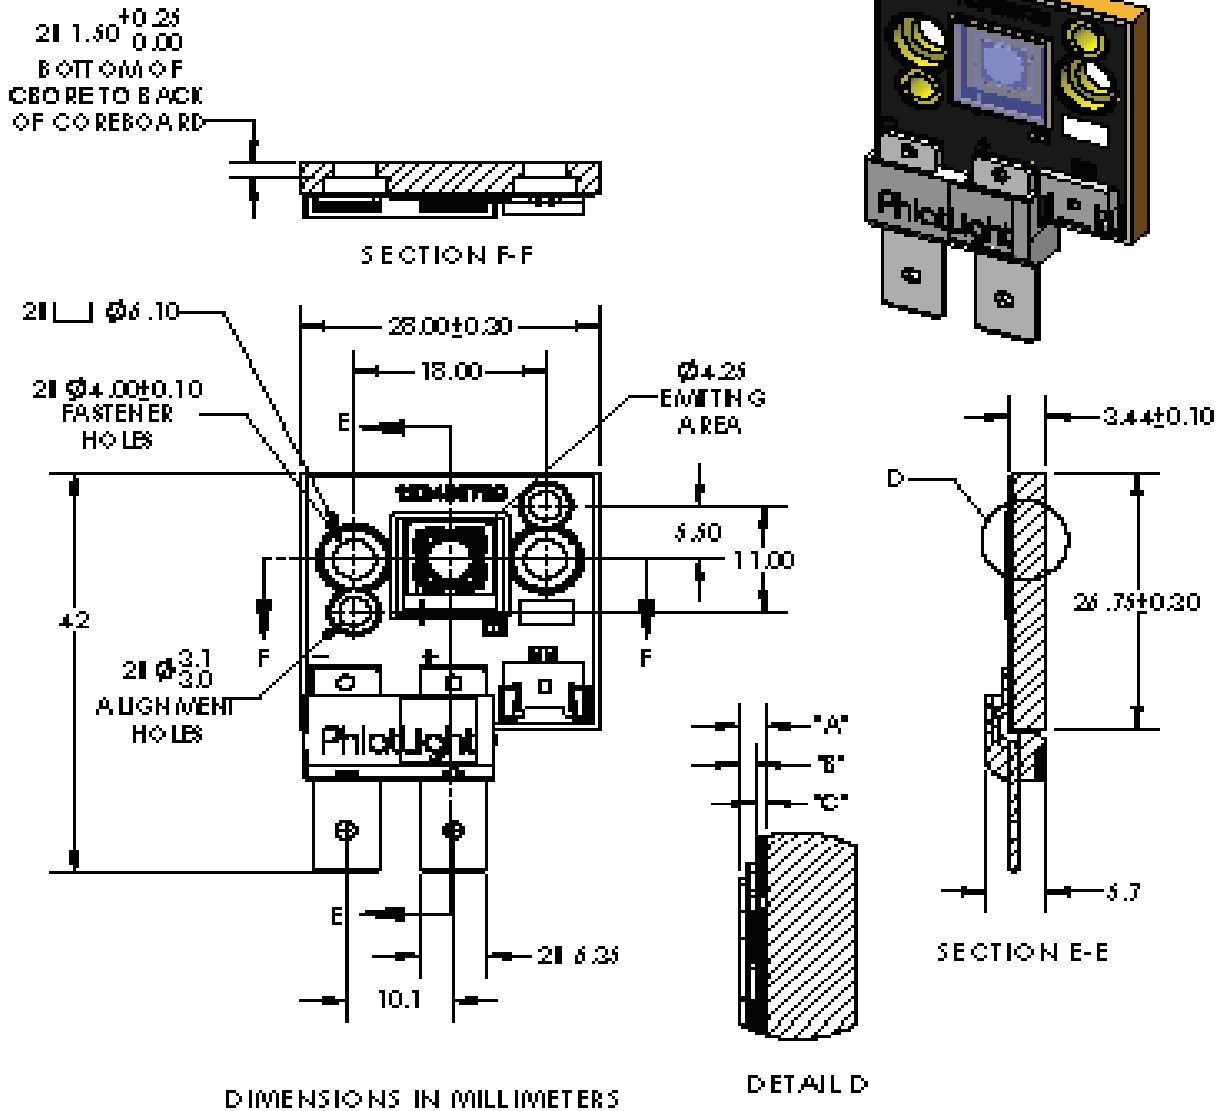
Note 1: Thermal resistance values are based on modeled results.

### Thermistor Information

The on-board thermistor used in CBT-140 LEDs mounted on core-boards is from Murata Manufacturing Co. The global part number is NCP18XH103J03RB. Please see <http://www.murata.com/> for details on calculating thermistor temperature.

### Electrical Pinout



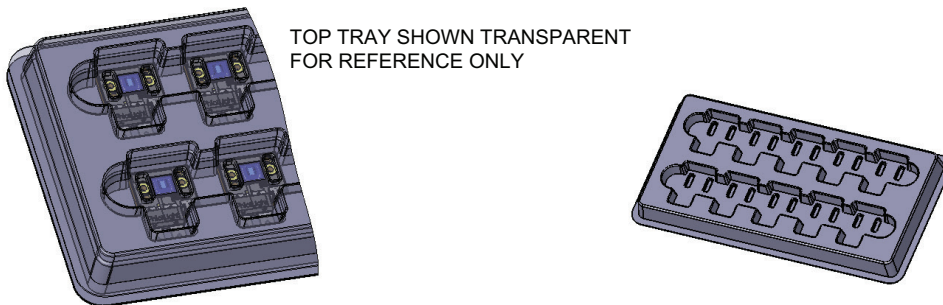
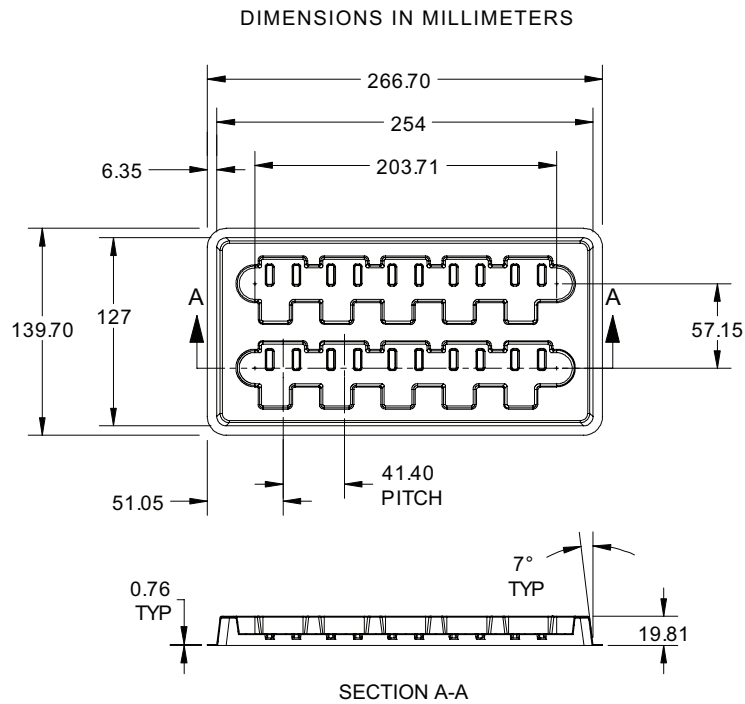
**Mechanical Dimensions – CBT-140 Emitter**


| DIMENSION NAME | DESCRIPTION  | NOMINAL DIMENSION | TOLERANCE |
|----------------|--|-------------------|-----------|
| "A"            | TOP OF METAL SUBSTRATE TO TOP OF WINDOW            | 0.95              | ±0.13     |
| "B"            | TOP OF DIE EMITTING AREA TO TOP OF WINDOW          | 0.63              | ±0.11     |
| "C"            | TOP OF METAL SUBSTRATE TO TOP OF DIE EMITTING AREA | 0.31              | ±0.02     |

DWG-002161

Re:  
 Thermistor Connector: MOLEX P/N 53780-0270 or GCT P/N WTB08-0215-F  
 Recommended Female: MOLEX P/N 51146-0200, GCT P/N WTB06-0215-F or equivalent  
 For detailed drawing please refer to DWG-001997 document

### Shipping Tray Outline



For detailed drawing of shipping trays, please refer to document TO-0479, available upon request.

## Packing and Shipping Specification (CBT-140)

### Packing Specification


| Packing Configuration   | Qty /Pack | Reel Dimensions<br>(diameter x W, mm) | Gross Weight (kg) |
|---|-----------|---------------------------------------|-------------------|
| Stack of 5 trays with 10 devices per tray<br>Each pack is enclosed in ESD bag | 50        | 150 x 280 x 85                        | 2.7               |








### Product Label Specification

#### Label Fields (subject to change):

- 6-8 digit Box number (for Luminus internal use)
- Luminus ordering part number
- Quantity of devices in pack
- Part number revision (for Luminus internal use)
- Customer's part number (optional)
- Bin (FF-WW) as defined page 3
- 2D Bar code




**LUMINUS**  
LEADER IN BIG CHIP LEDS Solid State Filament™

|   |   |   |
|---|---|---|
| <b>BT-012345</b><br><br><small>Box number</small>                 | <b>Qty: 50</b><br> |  |
| <b>PT-120-G-L11-MPG</b><br><br><small>Luminus part number</small> | <b>Rev 01</b><br>  | <small>for traceability peel off label and attach</small>                           |
| <b>12345678</b><br><br><small>Customer part number</small>       |   |   |
| <b>5F</b><br><br><small>Bin</small>                              |   |   |

**RoHS Compliant**

*Sample label –for illustration only*

### Shipping Box

| Shipping Box | Quantity                           | Material | Dimensions<br>(L x W x H, mm) |
|--------------|------------------------------------|----------|-------------------------------|
| Carton Box   | 1 -20 packs<br>(50 - 1000 Devices) | S4651    | 560 x 560 x 200               |





## History of Changes

| Rev | Date       | Description of Change  |
|-----|------------|--|
| 07  | 7/13/2015  | <ul style="list-style-type: none"> <li>o Removed discontinued Tungsten White color point – CBT-140-WTH</li> <li>o Clarified absolute minimum drive current</li> <li>o Editorial fixes</li> <li>o Added change history</li> <li>o Added shipping tray outline</li> <li>o Added packing and shipping specs</li> <li>o Merged Binning and Labelling document (PDS-002040) into the product datasheet. PDS-002040 has been obsoleted.</li> </ul> |
| 08  | 11/25/2015 | o Remove references to obsolete flux bin TA  |
| 09  | 2/12/2019  | o Documented higher flux for CBT-140-W products  |

The products, their specifications and other information appearing in this document are subject to change by Luminus Devices without notice. Luminus Devices assumes no liability for errors that may appear in this document, and no liability otherwise arising from the application or use of the product or information contained herein. None of the information provided herein should be considered to be a representation of the fitness or suitability of the product for any particular application or as any other form of warranty. Luminus Devices' product warranties are limited to only such warranties as accompany a purchase contract or purchase order for such products. Nothing herein is to be construed as constituting an additional warranty. No information contained in this publication may be considered as a waiver by Luminus Devices of any intellectual property rights that Luminus Devices may have in such information. LEDs™ is a registered trademark of Luminus Devices, Inc., all rights reserved.

This product is protected by U.S. Patents 6,831,302; 7,074,631; 7,083,993; 7,084,434; 7,098,589; 7,105,861; 7,138,666; 7,166,870; 7,166,871; 7,170,100; 7,196,354; 7,211,831; 7,262,550; 7,274,043; 7,301,271; 7,341,880; 7,344,903; 7,345,416; 7,348,603; 7,388,233; 7,391,059 Patents Pending in the U.S. and other countries.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.