

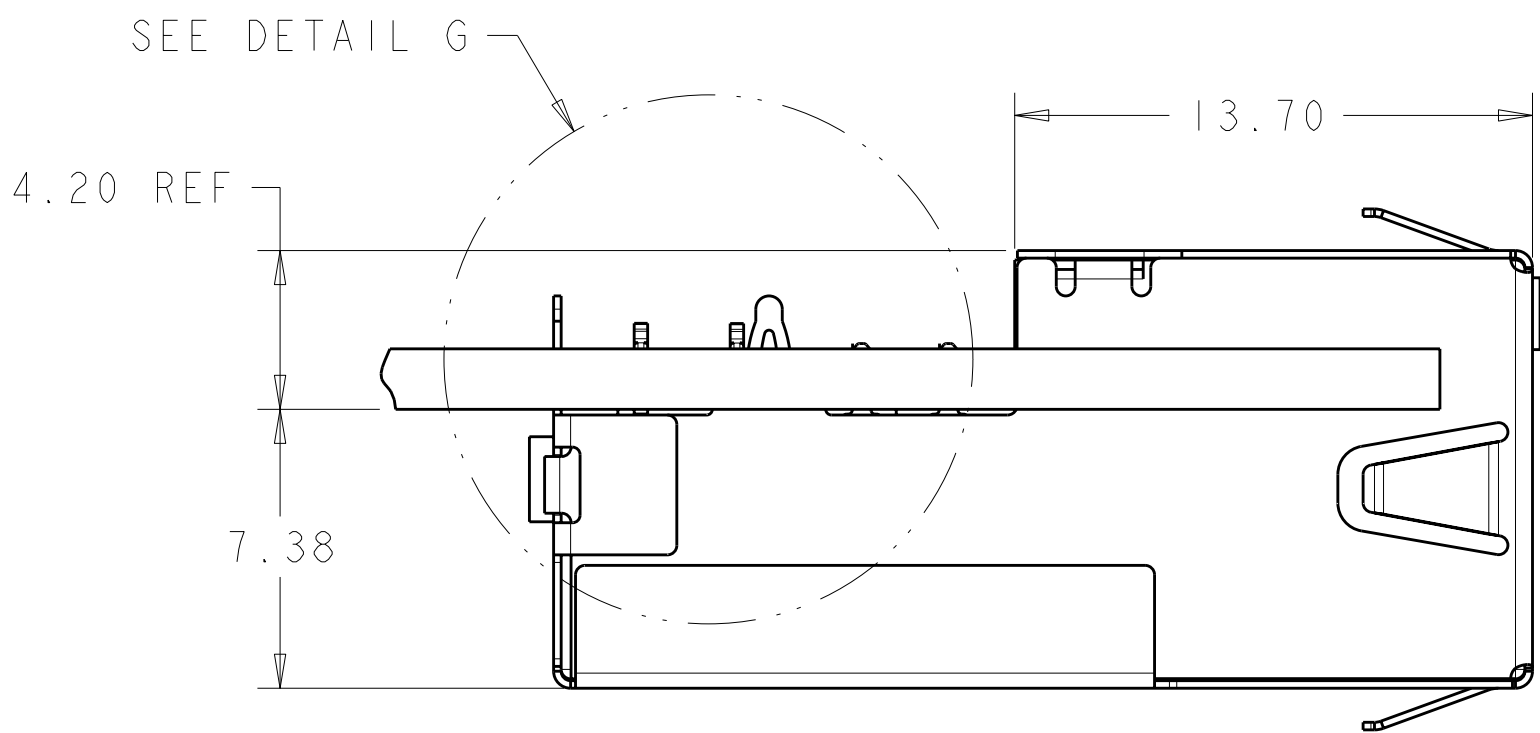
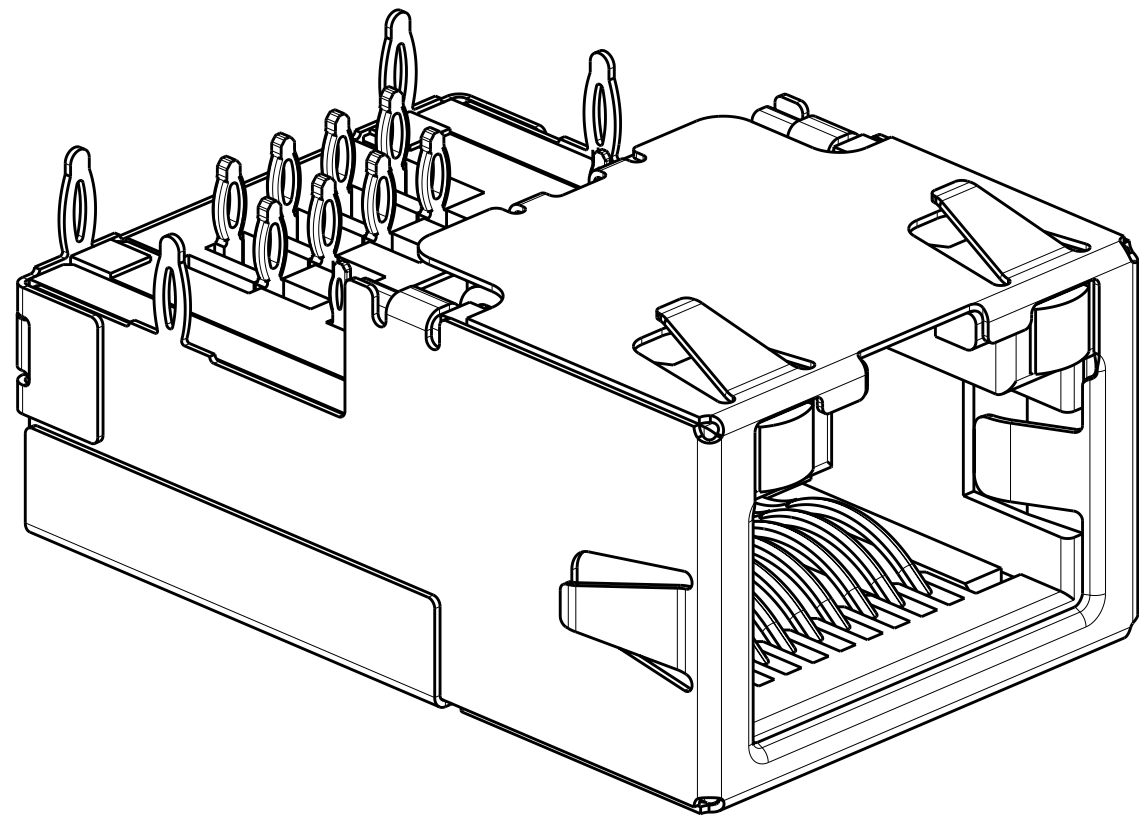
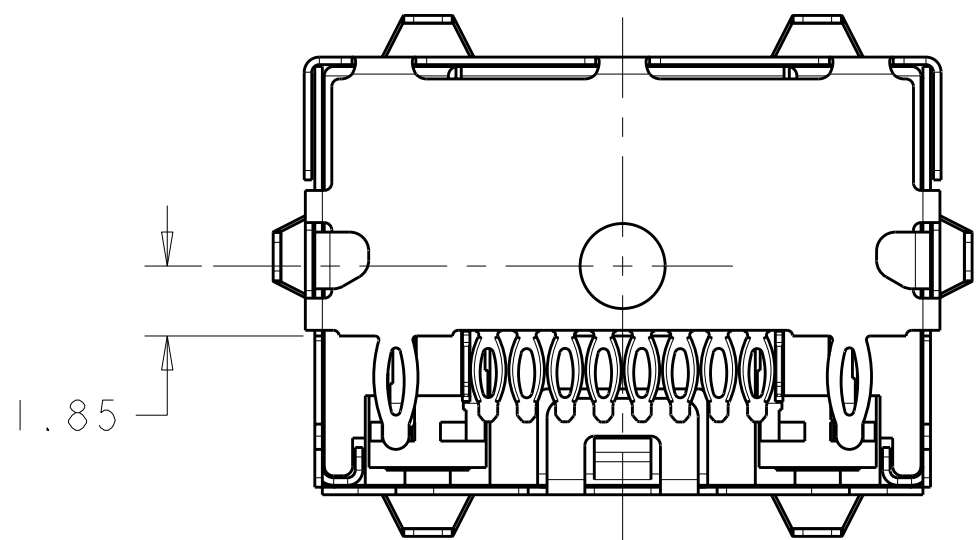
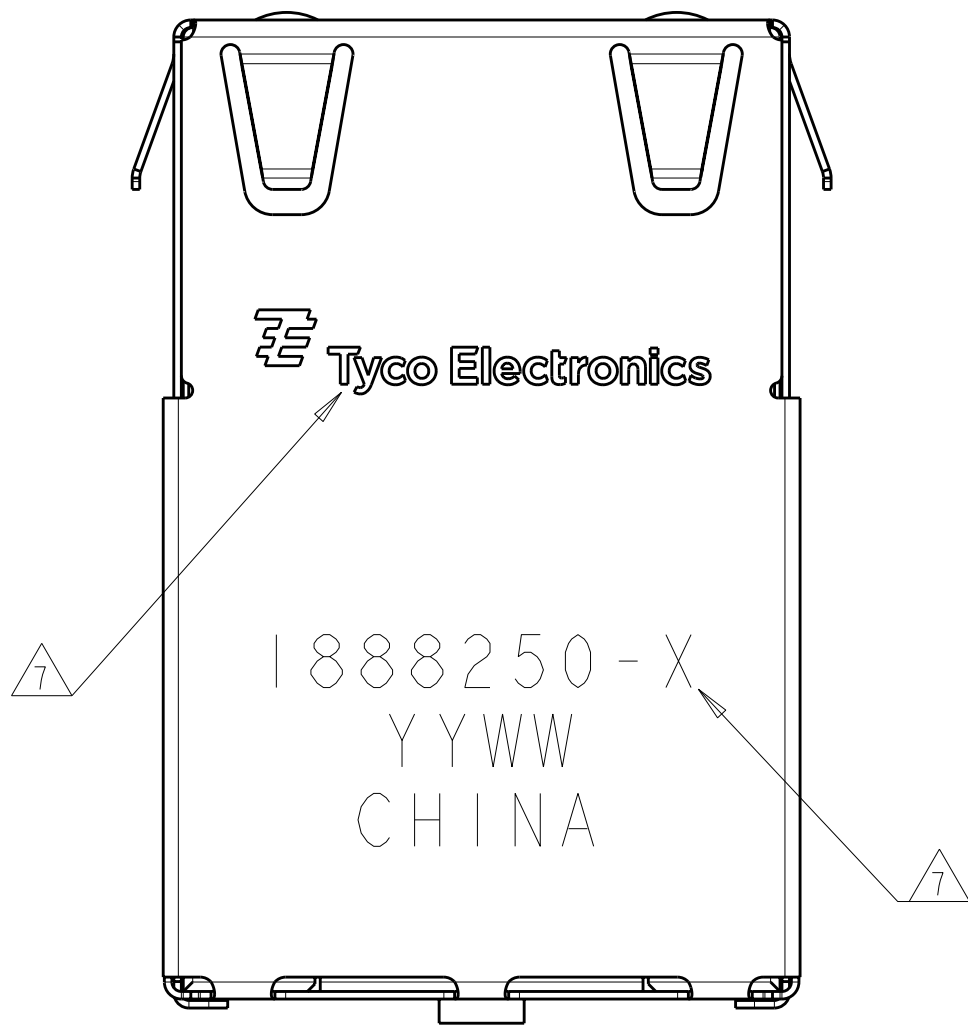


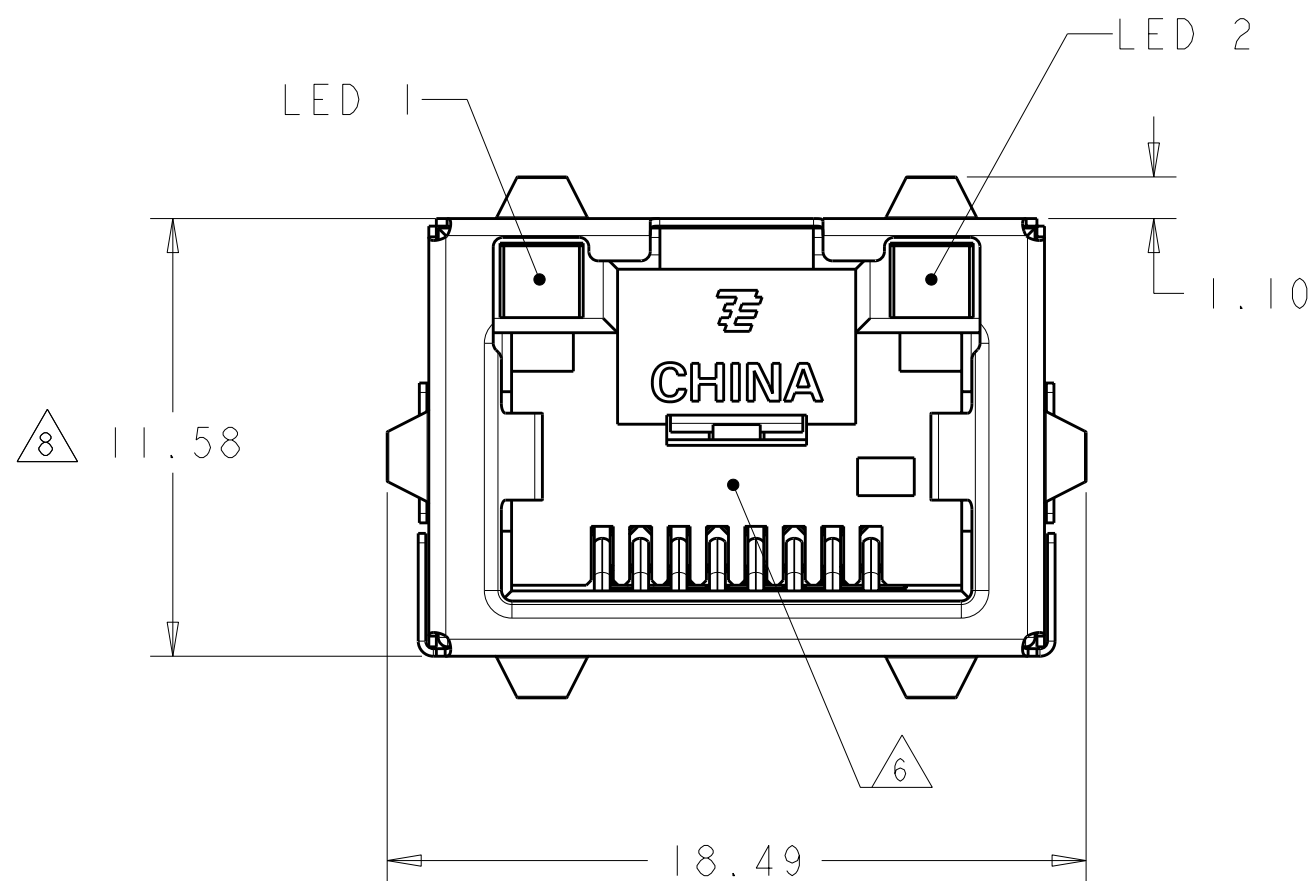


VIEW SHOWN ASSEMBLED
TO PCB ONLY

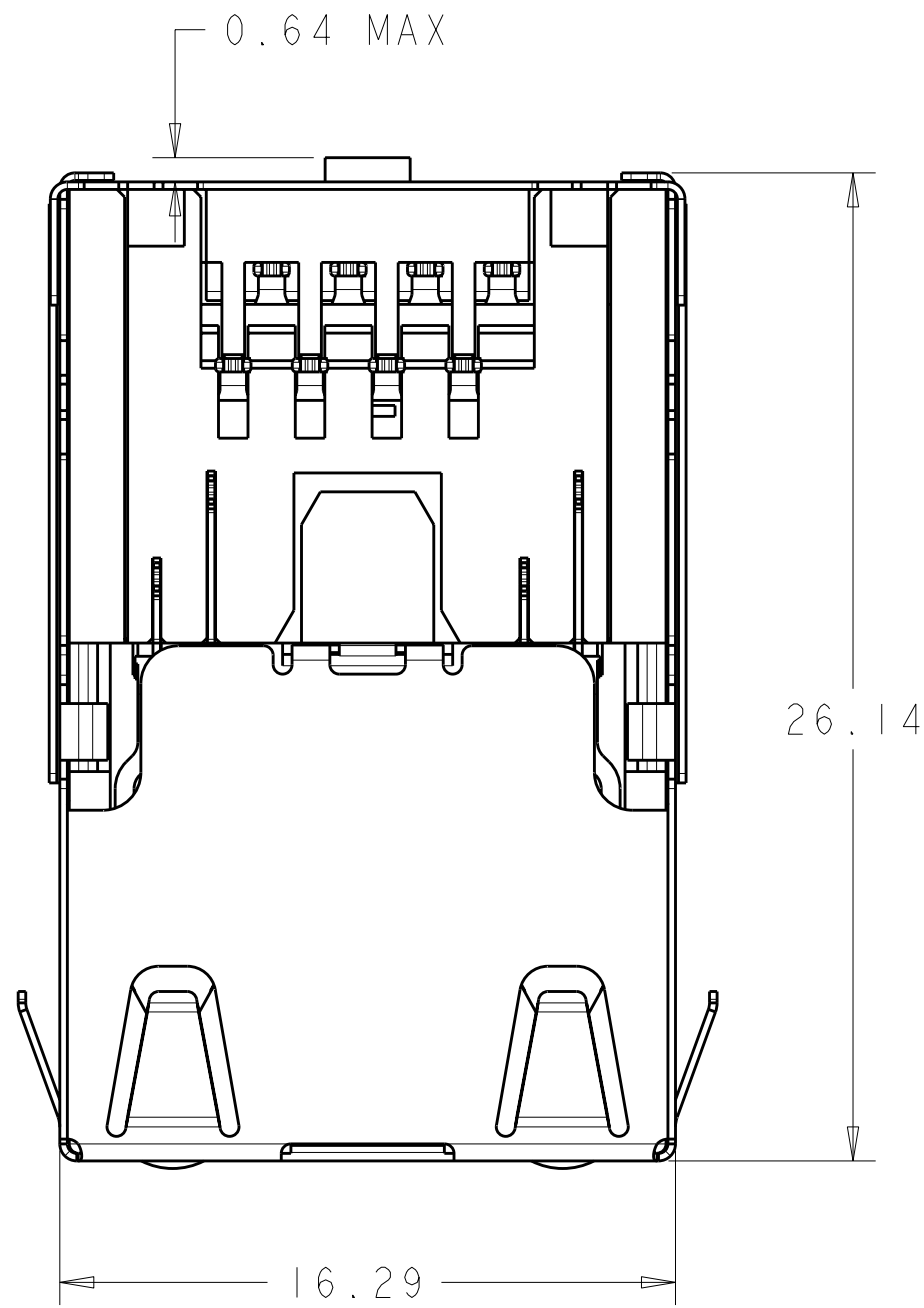







- MATERIALS:
HOUSING: BLACK THERMOPLASTIC, 94V-0.
SHIELD: COPPER ALLOY WITH 0.76µm MIN NICKEL PLATE
CONTACTS: PHOSPHOR BRONZE WITH 1.27µm MIN GOLD
AT MATING INTERFACE OVER 1.27µm MIN NICKEL
UNDERPLATE.
- PERFORMANCE:
INSERTION LOSS: 0.4dB @ 100 MHz.
RETURN LOSS: 12.0dB @ 100 MHz.
CROSSTALK ATTENUATION: -43dB MINIMUM @ 100 MHz
CURRENT: 0.6 AMPERE MAXIMUM PER SINGAL CONTACT.
- LED's COMPLIANT WITH IEC60825-1 SAFETY OF LASER
PRODUCTS WHEN OPERATED AT CURRENT OF 20mA.
- ALL DIMENSIONS NOMINAL.
- RECOMMENDED MOTHERBOARD PCB THICKNESS: 1.60±0.16.
- RJ45 PORT CONFORMS TO FCC RULES AND REGULATIONS
PART 68 SUB-PART F.
- TE LOGO, PART NUMBER, DATE CODE AND
COUNTRY OF ORIGIN TO BE MARKED IN APPROXIMATE LOCATION
SHOWN.
- THIS DIMENSION MEETS THE ADVANCED MEZZANINE CARD
(AMC) SPECIFICATION.
- PIN 9,10,11,12 ARE LED LEAD PINS, For 1888250-3, NO
LED INTEGRATED, HOLES ON PCB FOR THESE PINS ARE ONLY OPTIONAL.

LOC	DIST	REVISIONS					
AA	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B5	ECR-11-009822	11MAY2011	JJ	MOW
			C	ECR-12-002445	09FEB2012	JJ	AC

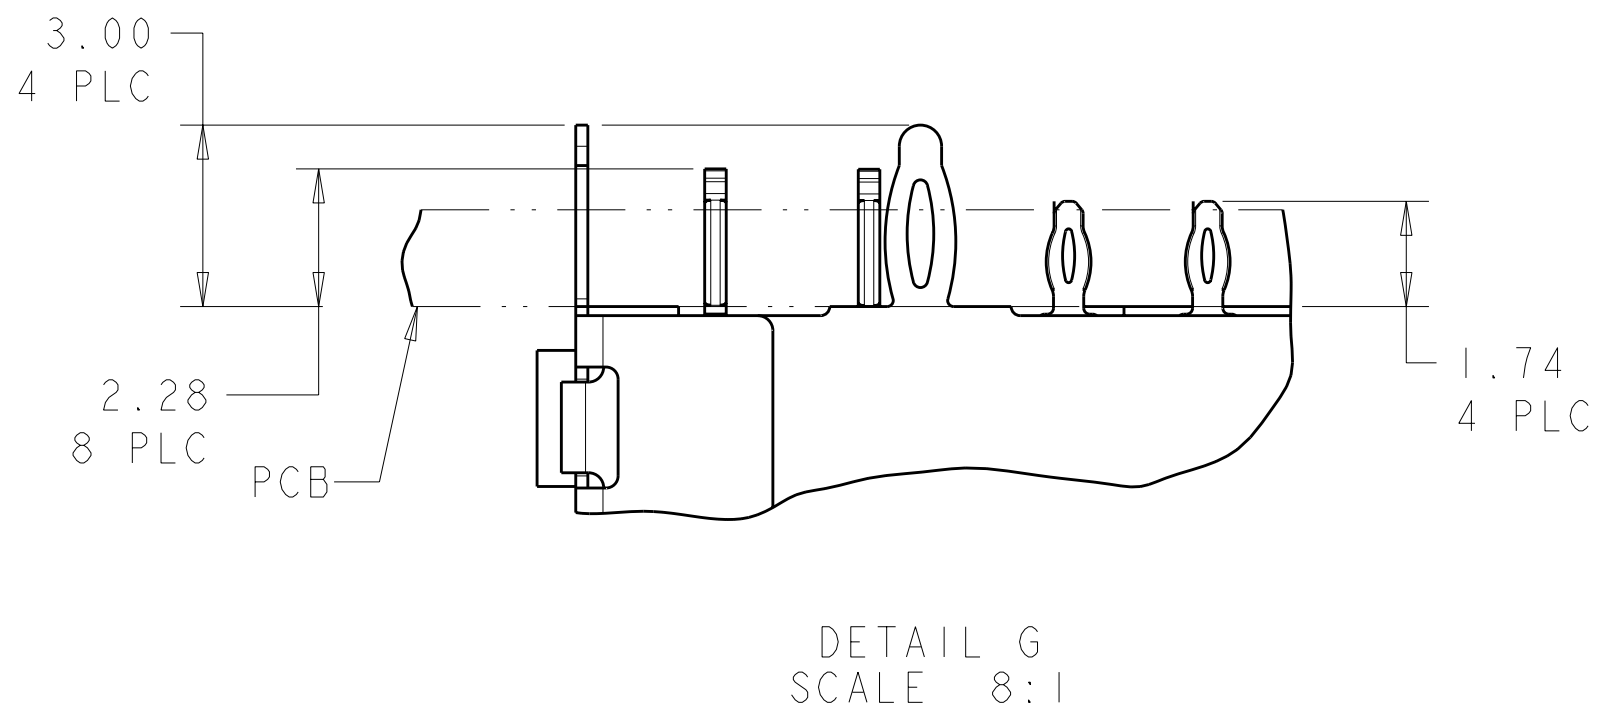

YELLOW	GREEN	1888250-5
GREEN	GREEN	1888250-4
-	-	1888250-3
GRN/YEL	GRN/YEL	1888250-2
GREEN	YELLOW	1888250-1
LED #1	LED #2	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: MS/L.A.MAYER 15FEB2008	TE Connectivity	
DIMENSIONS:		CHK: J.WESTMAN 15FEB2008	NAME: CONNECTOR ASSEMBLY, LOW PROFILE, PRESS FIT, MODULAR JACK, 1X1, RJ45	
mm		APVD: S.FLICKINGER 15FEB2008	SIZE: CAGE CODE: DRAWING NO: A100779C=1888250	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	RESTRICTED TO	
9 PLC ±		108-2274	SCALE: 1:1	
2 PLC ±0.13		APPLICATION SPEC	SHEET 1 OF 3	
3 PLC ±		114-13179	REV C	
4 PLC ±		WEIGHT: -		
ANGLES ±°		CUSTOMER DRAWING		
FINISH				
MATERIAL SEE NOTE 1				
SEE NOTE 1				

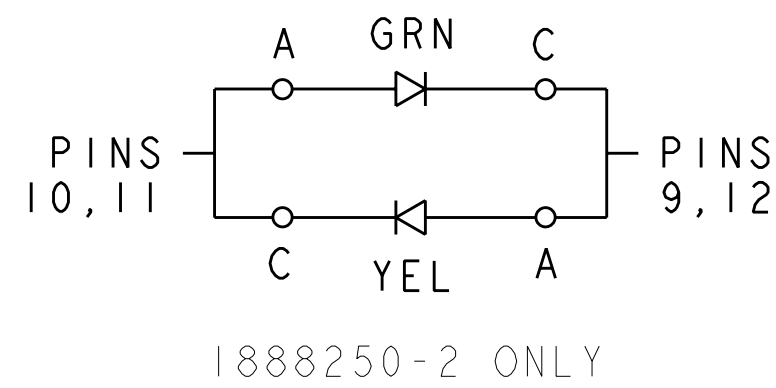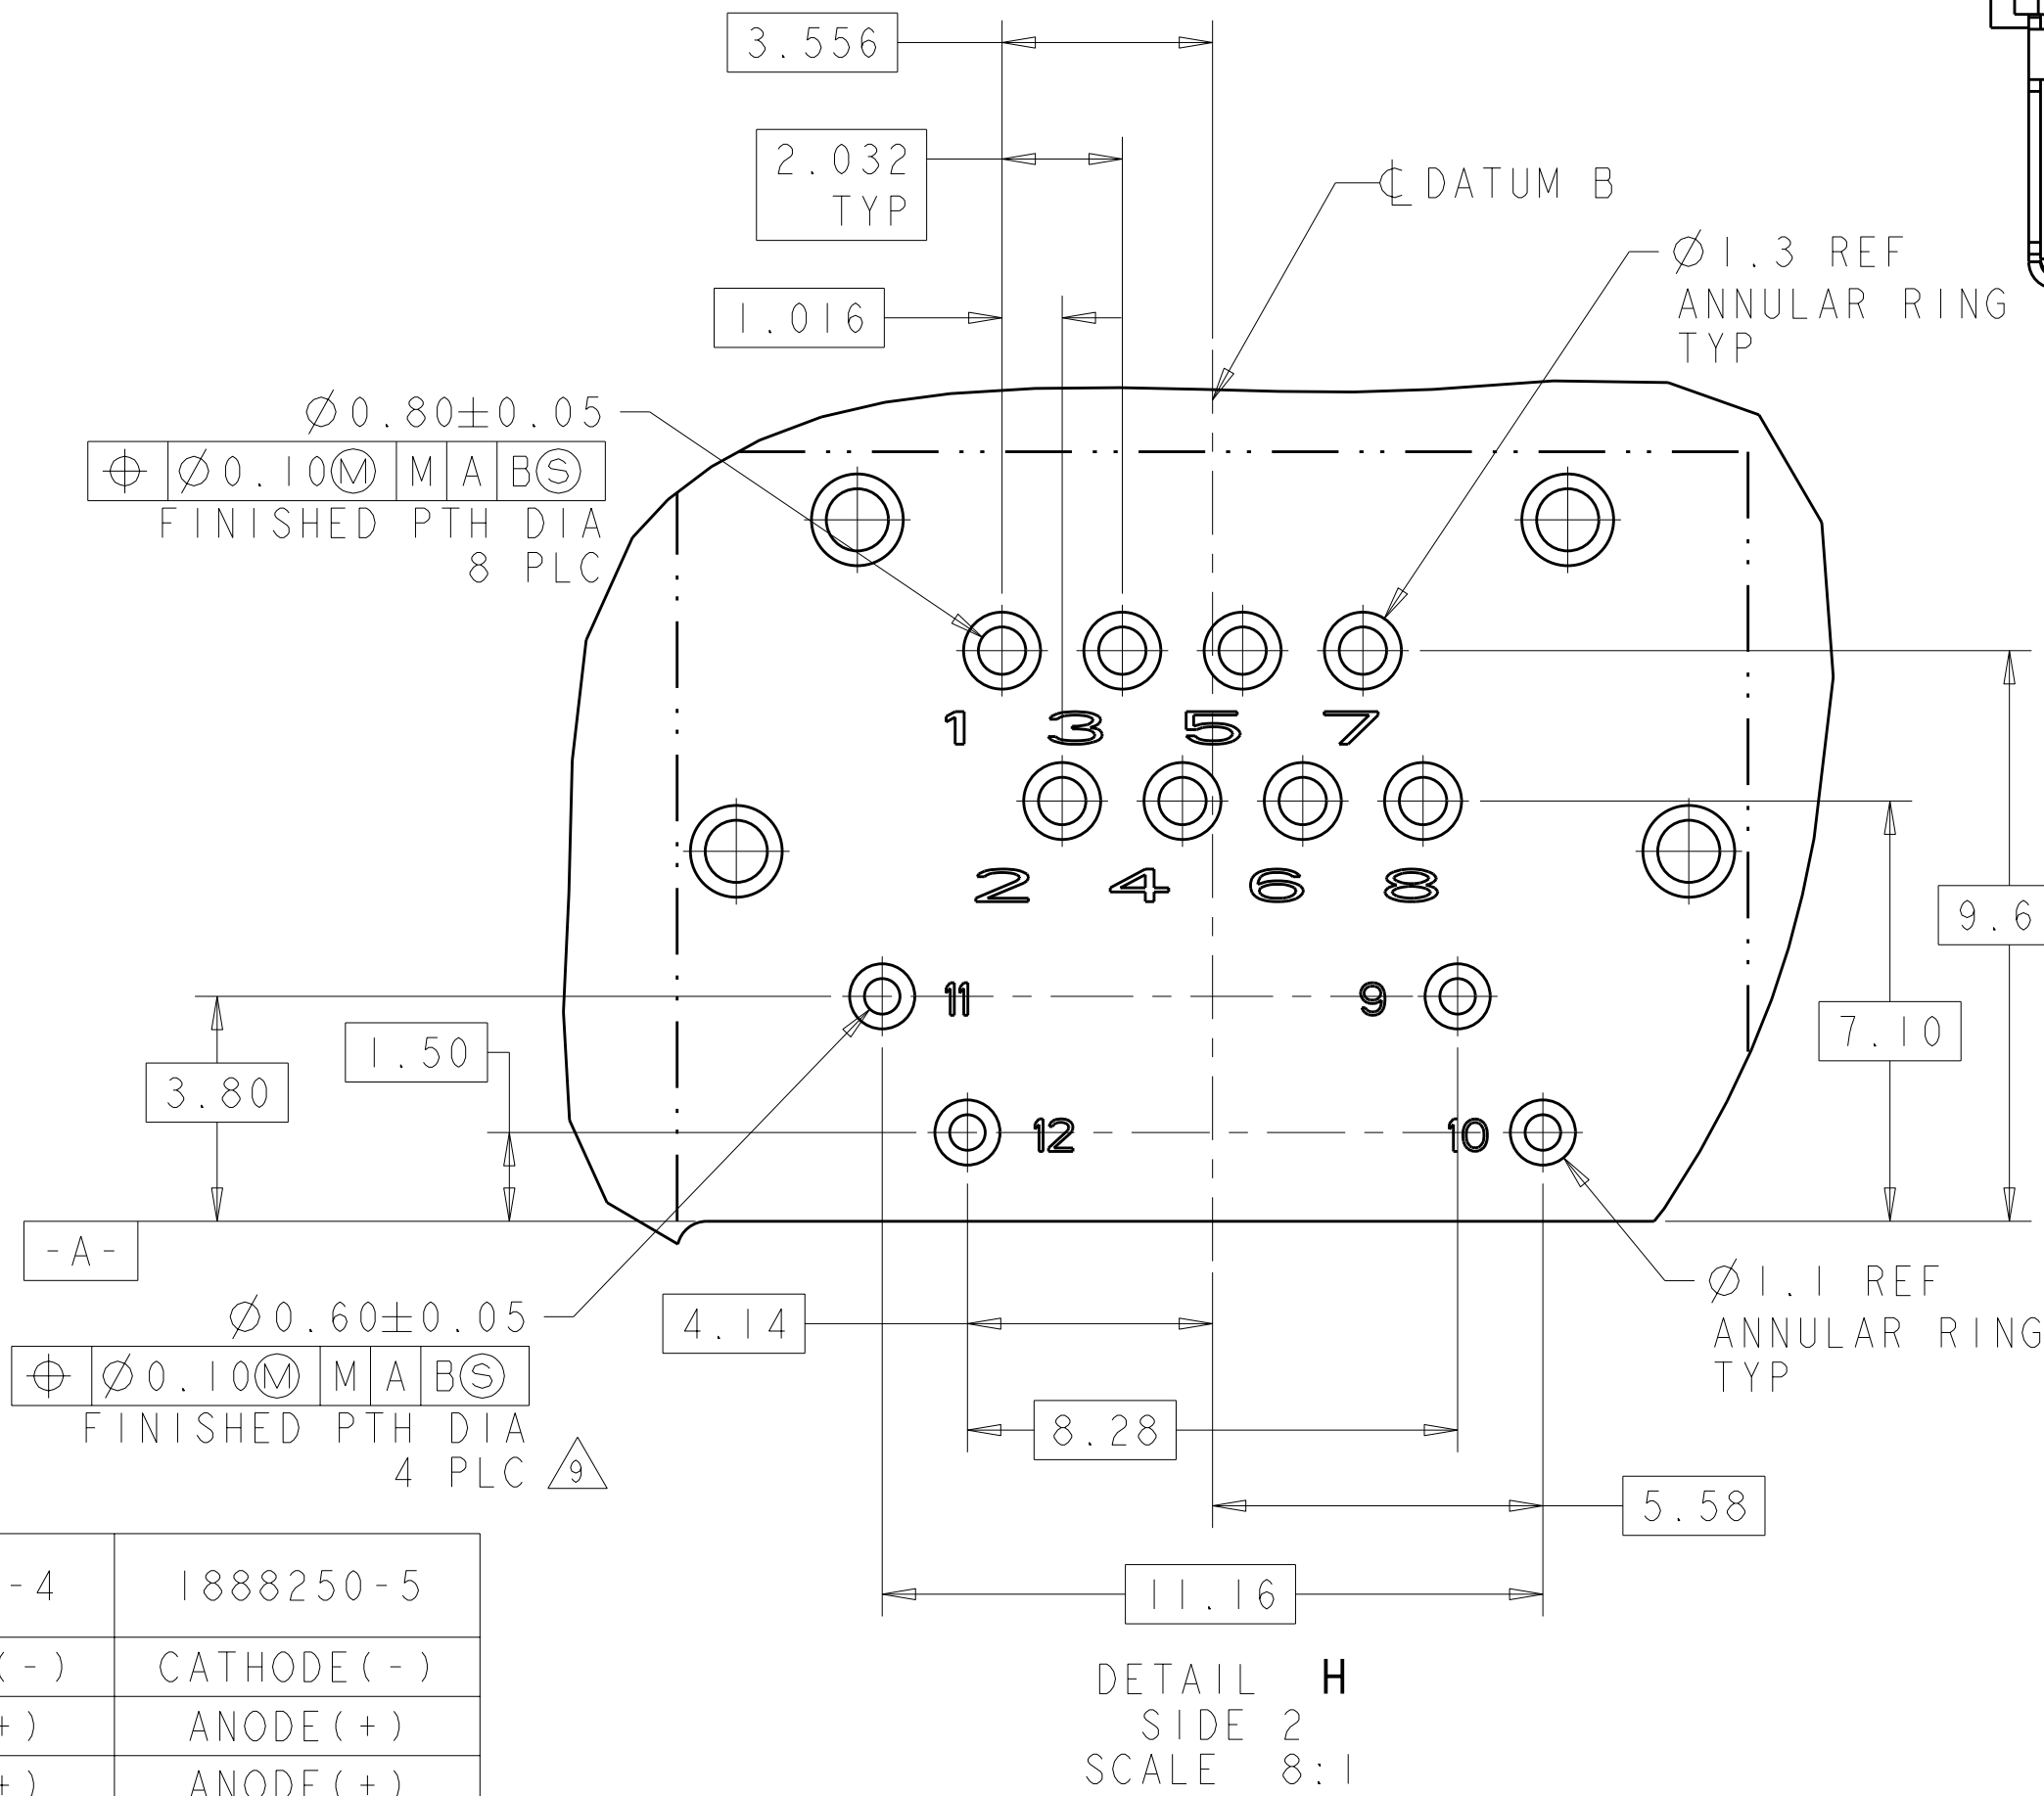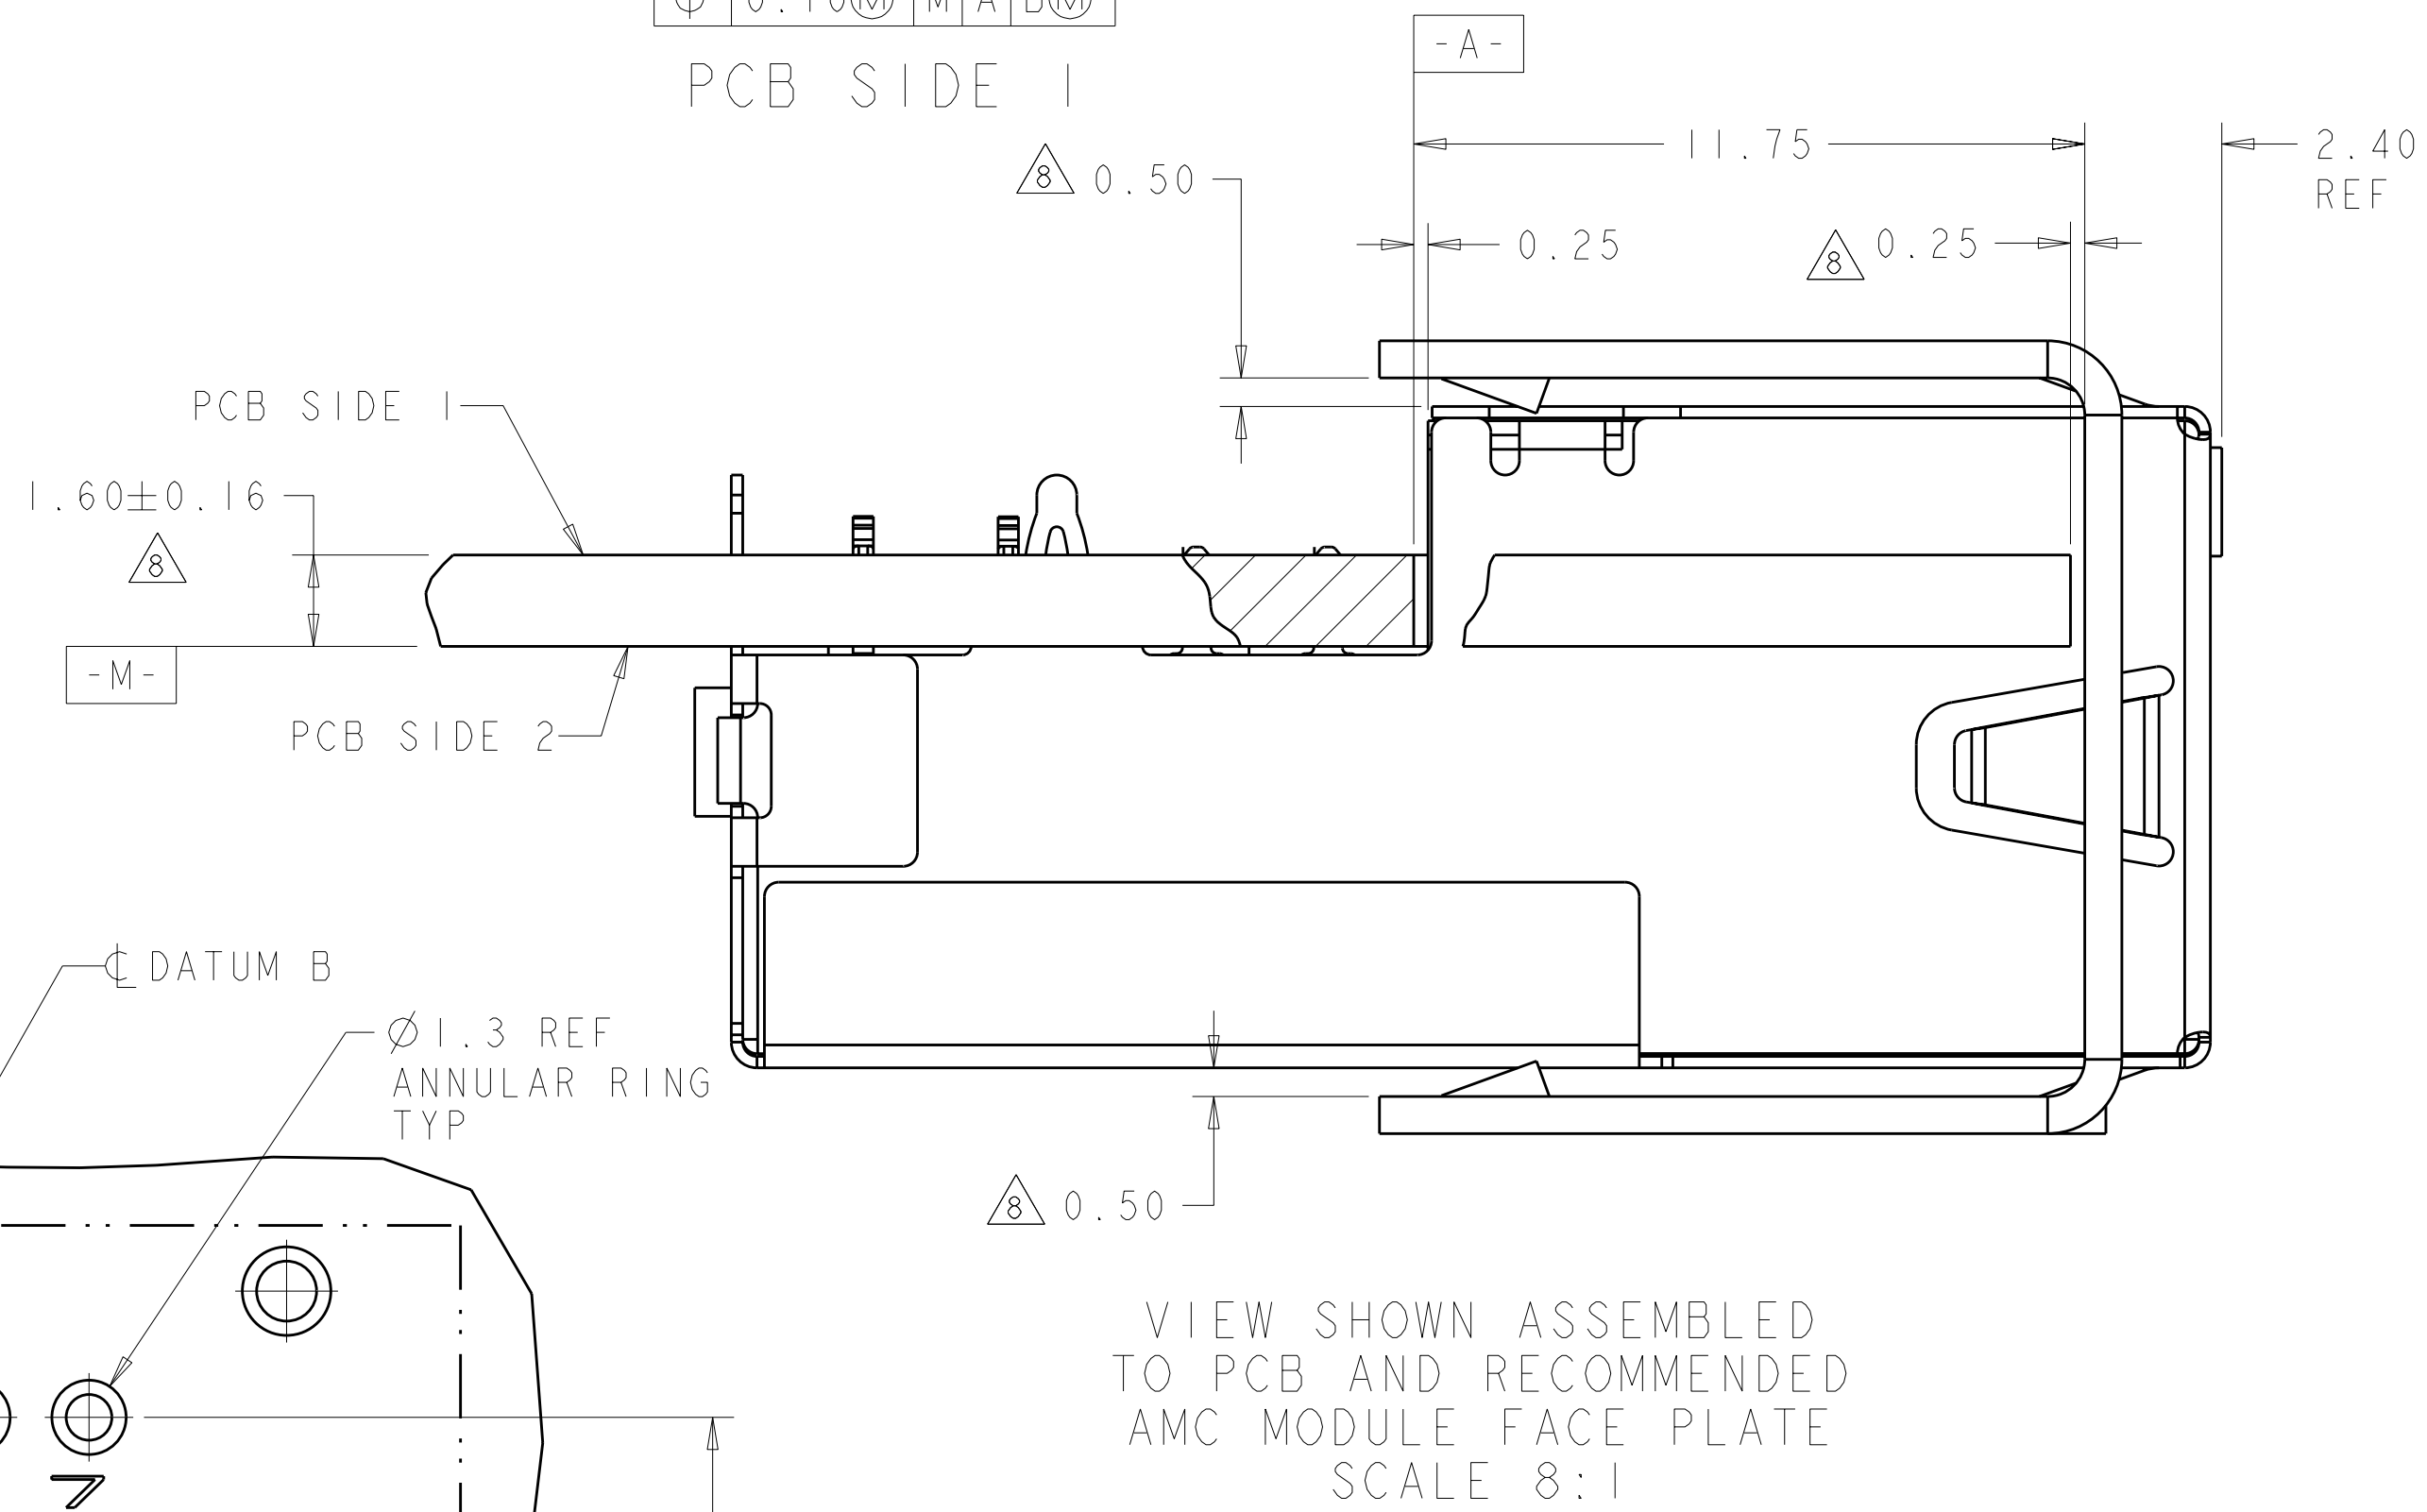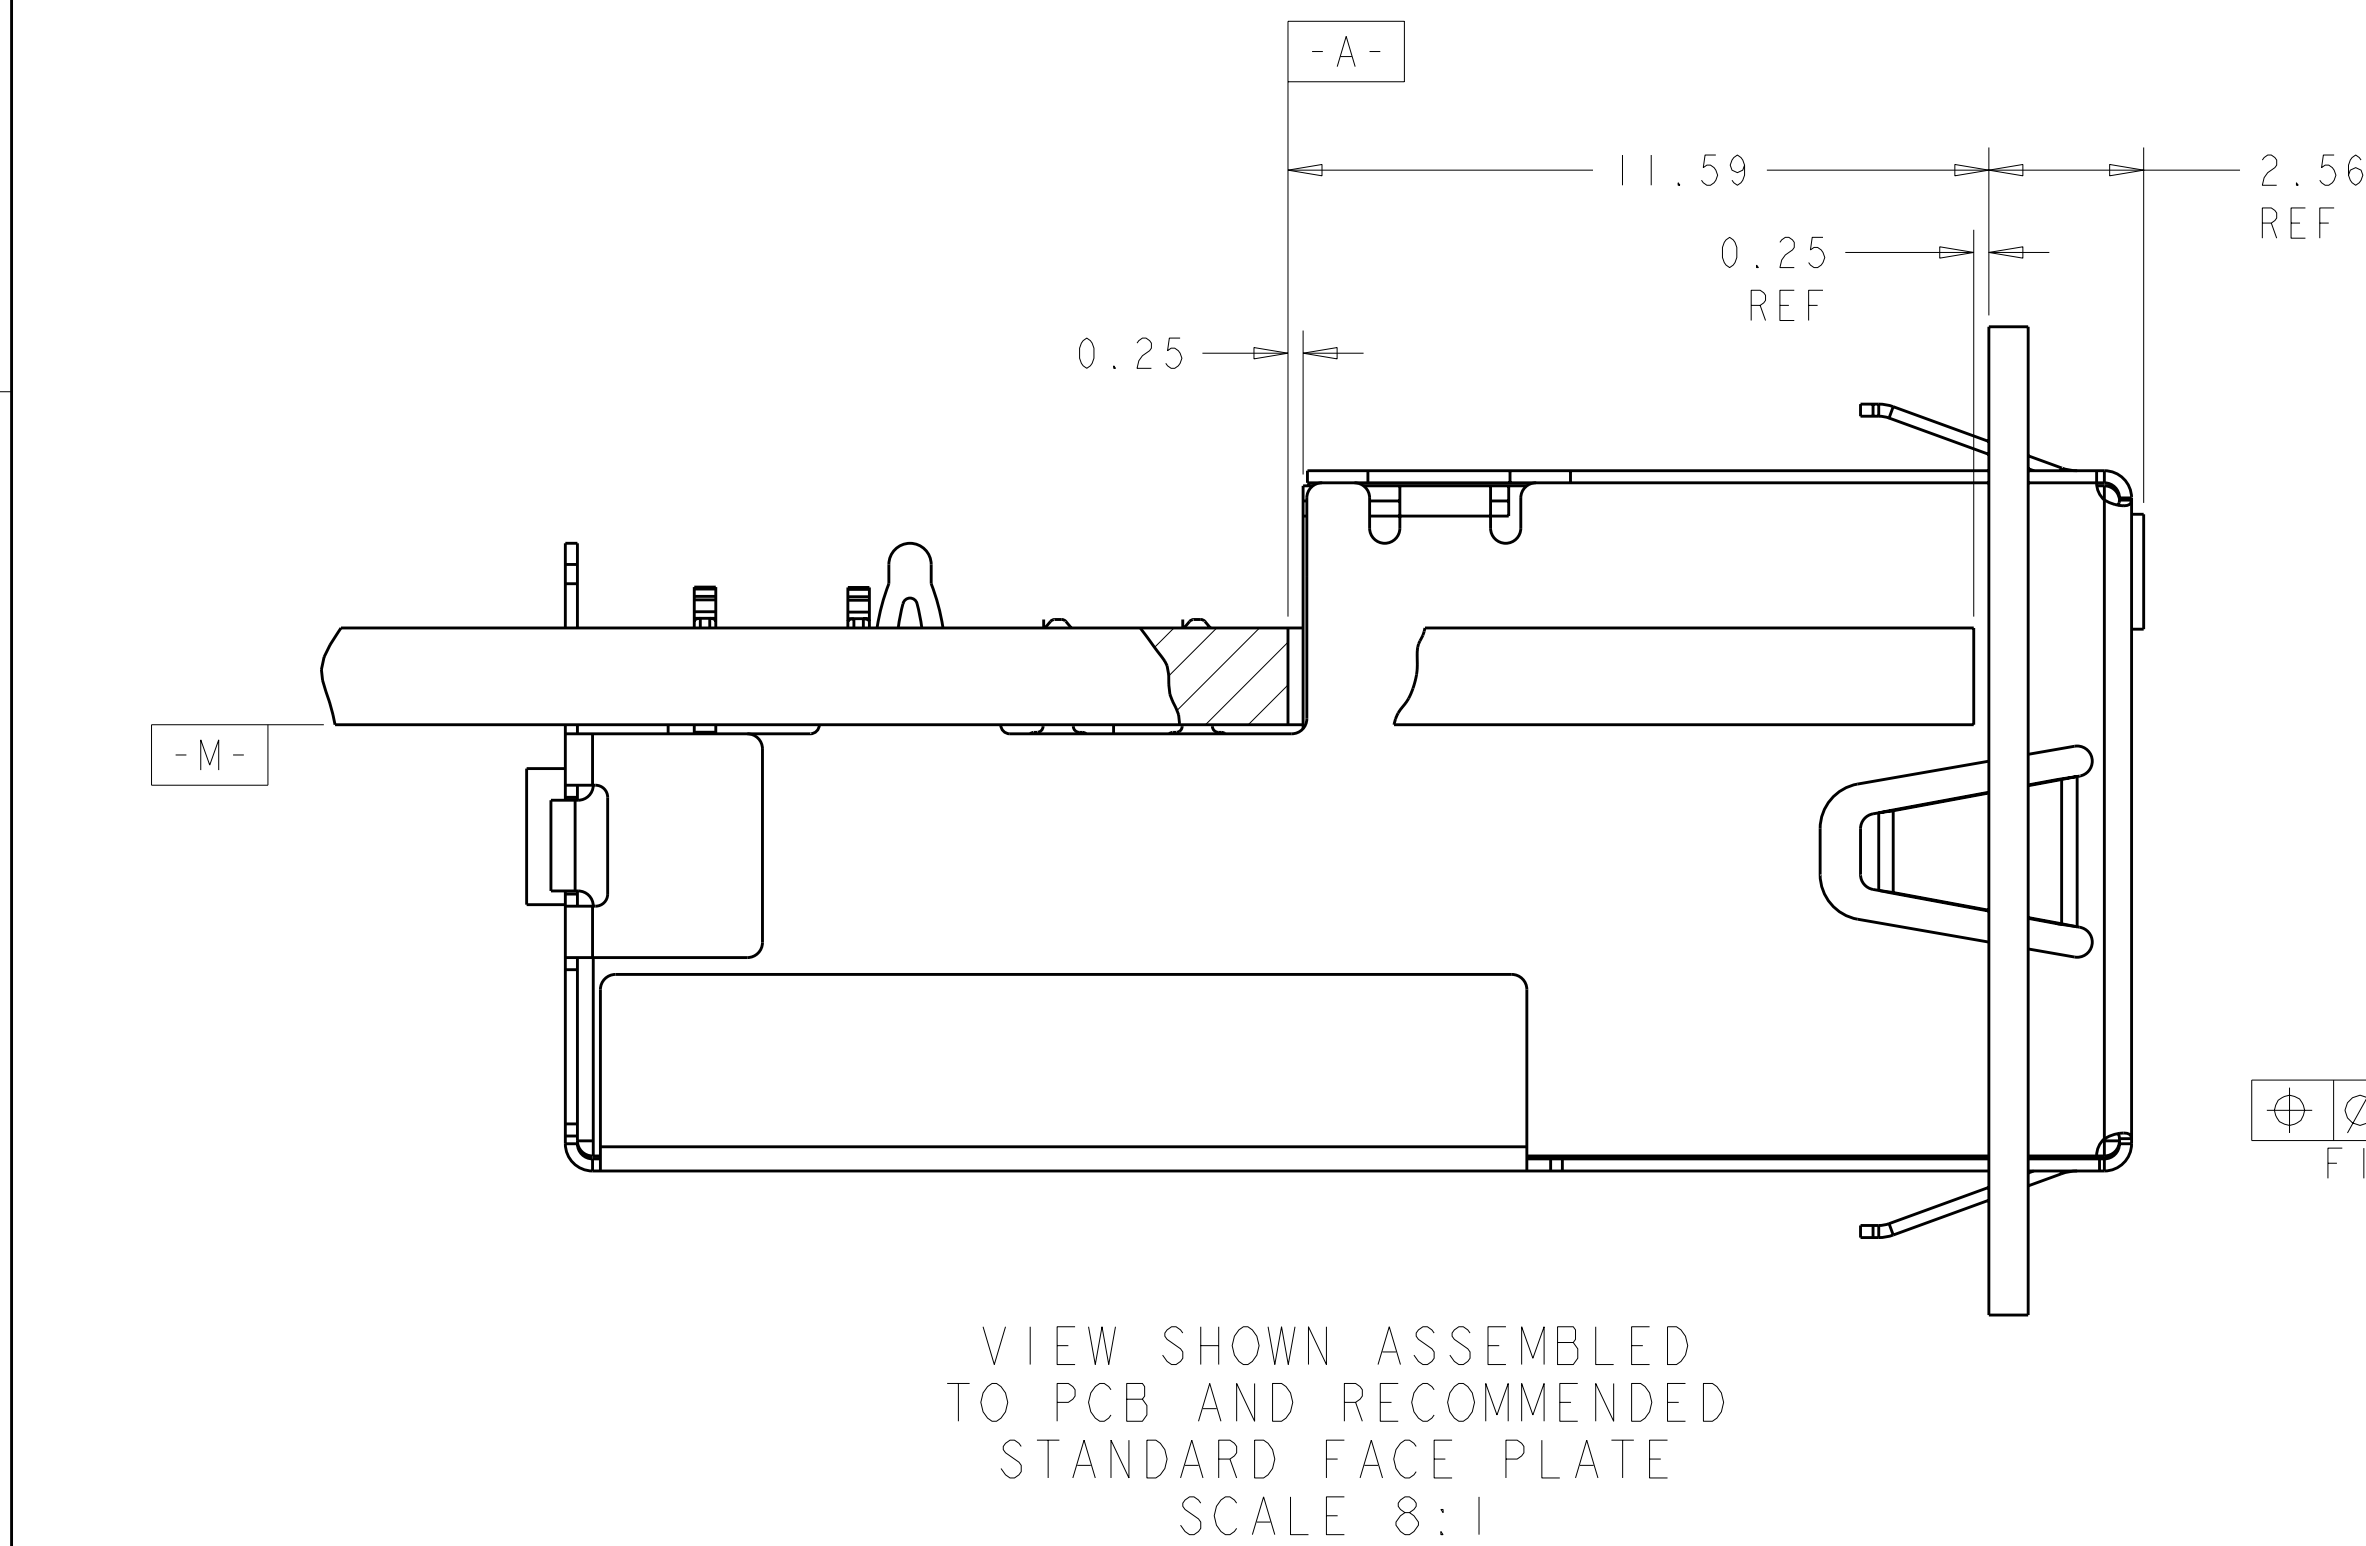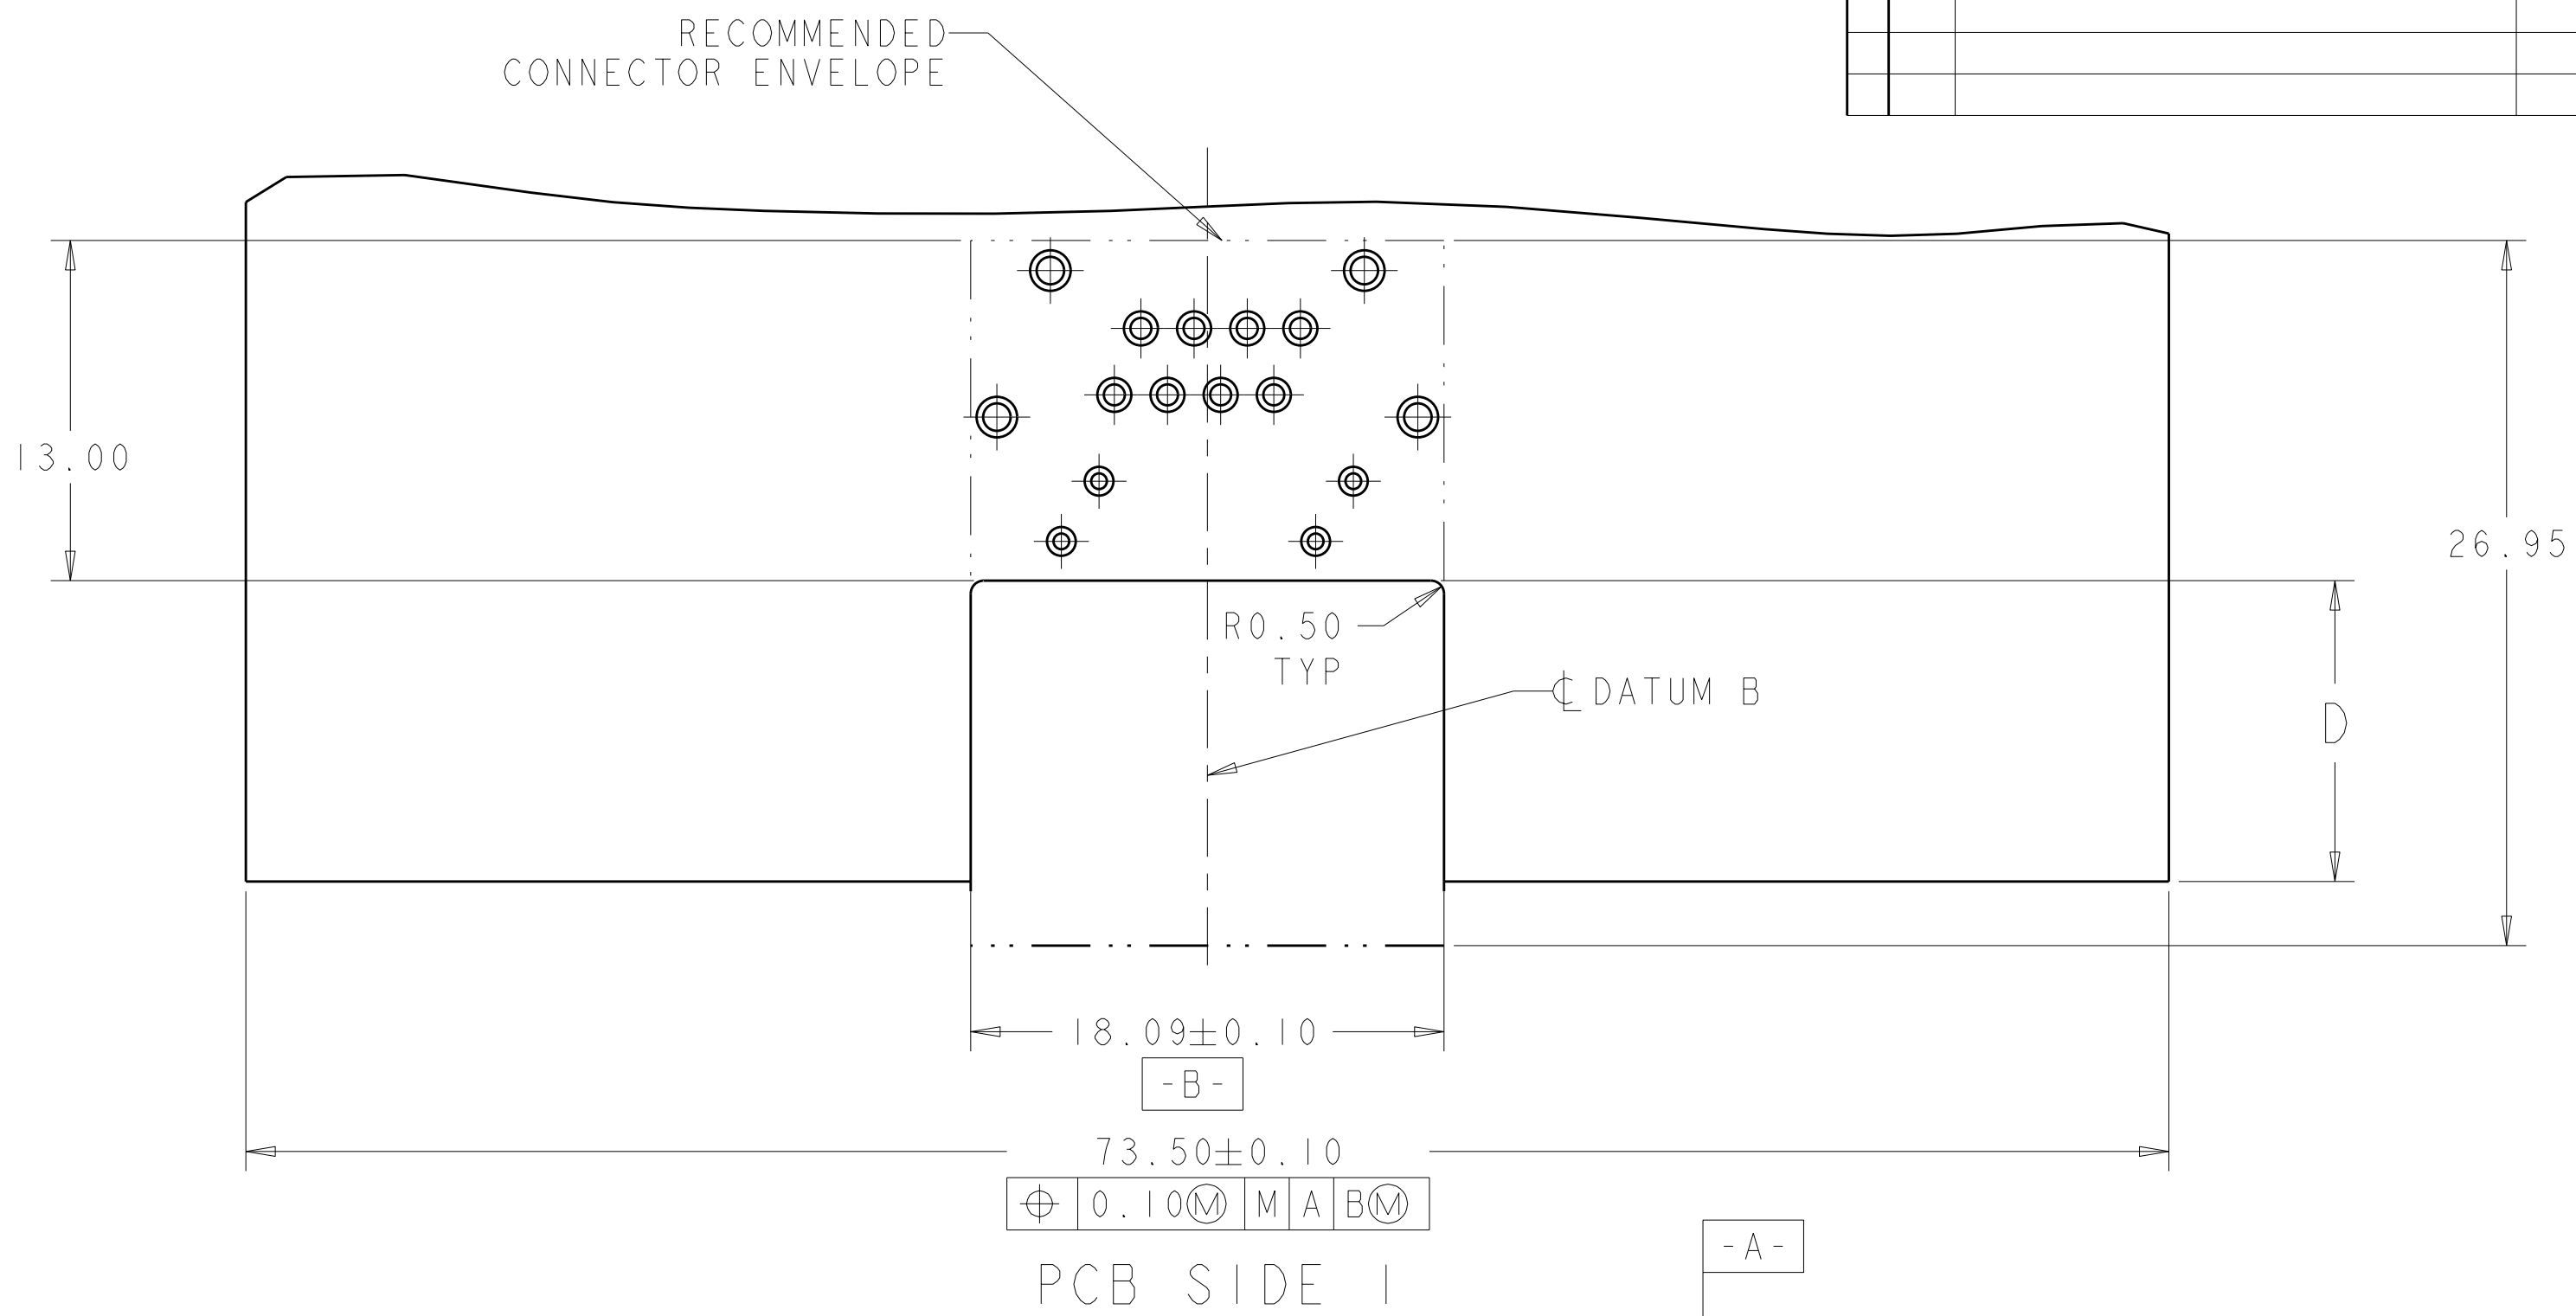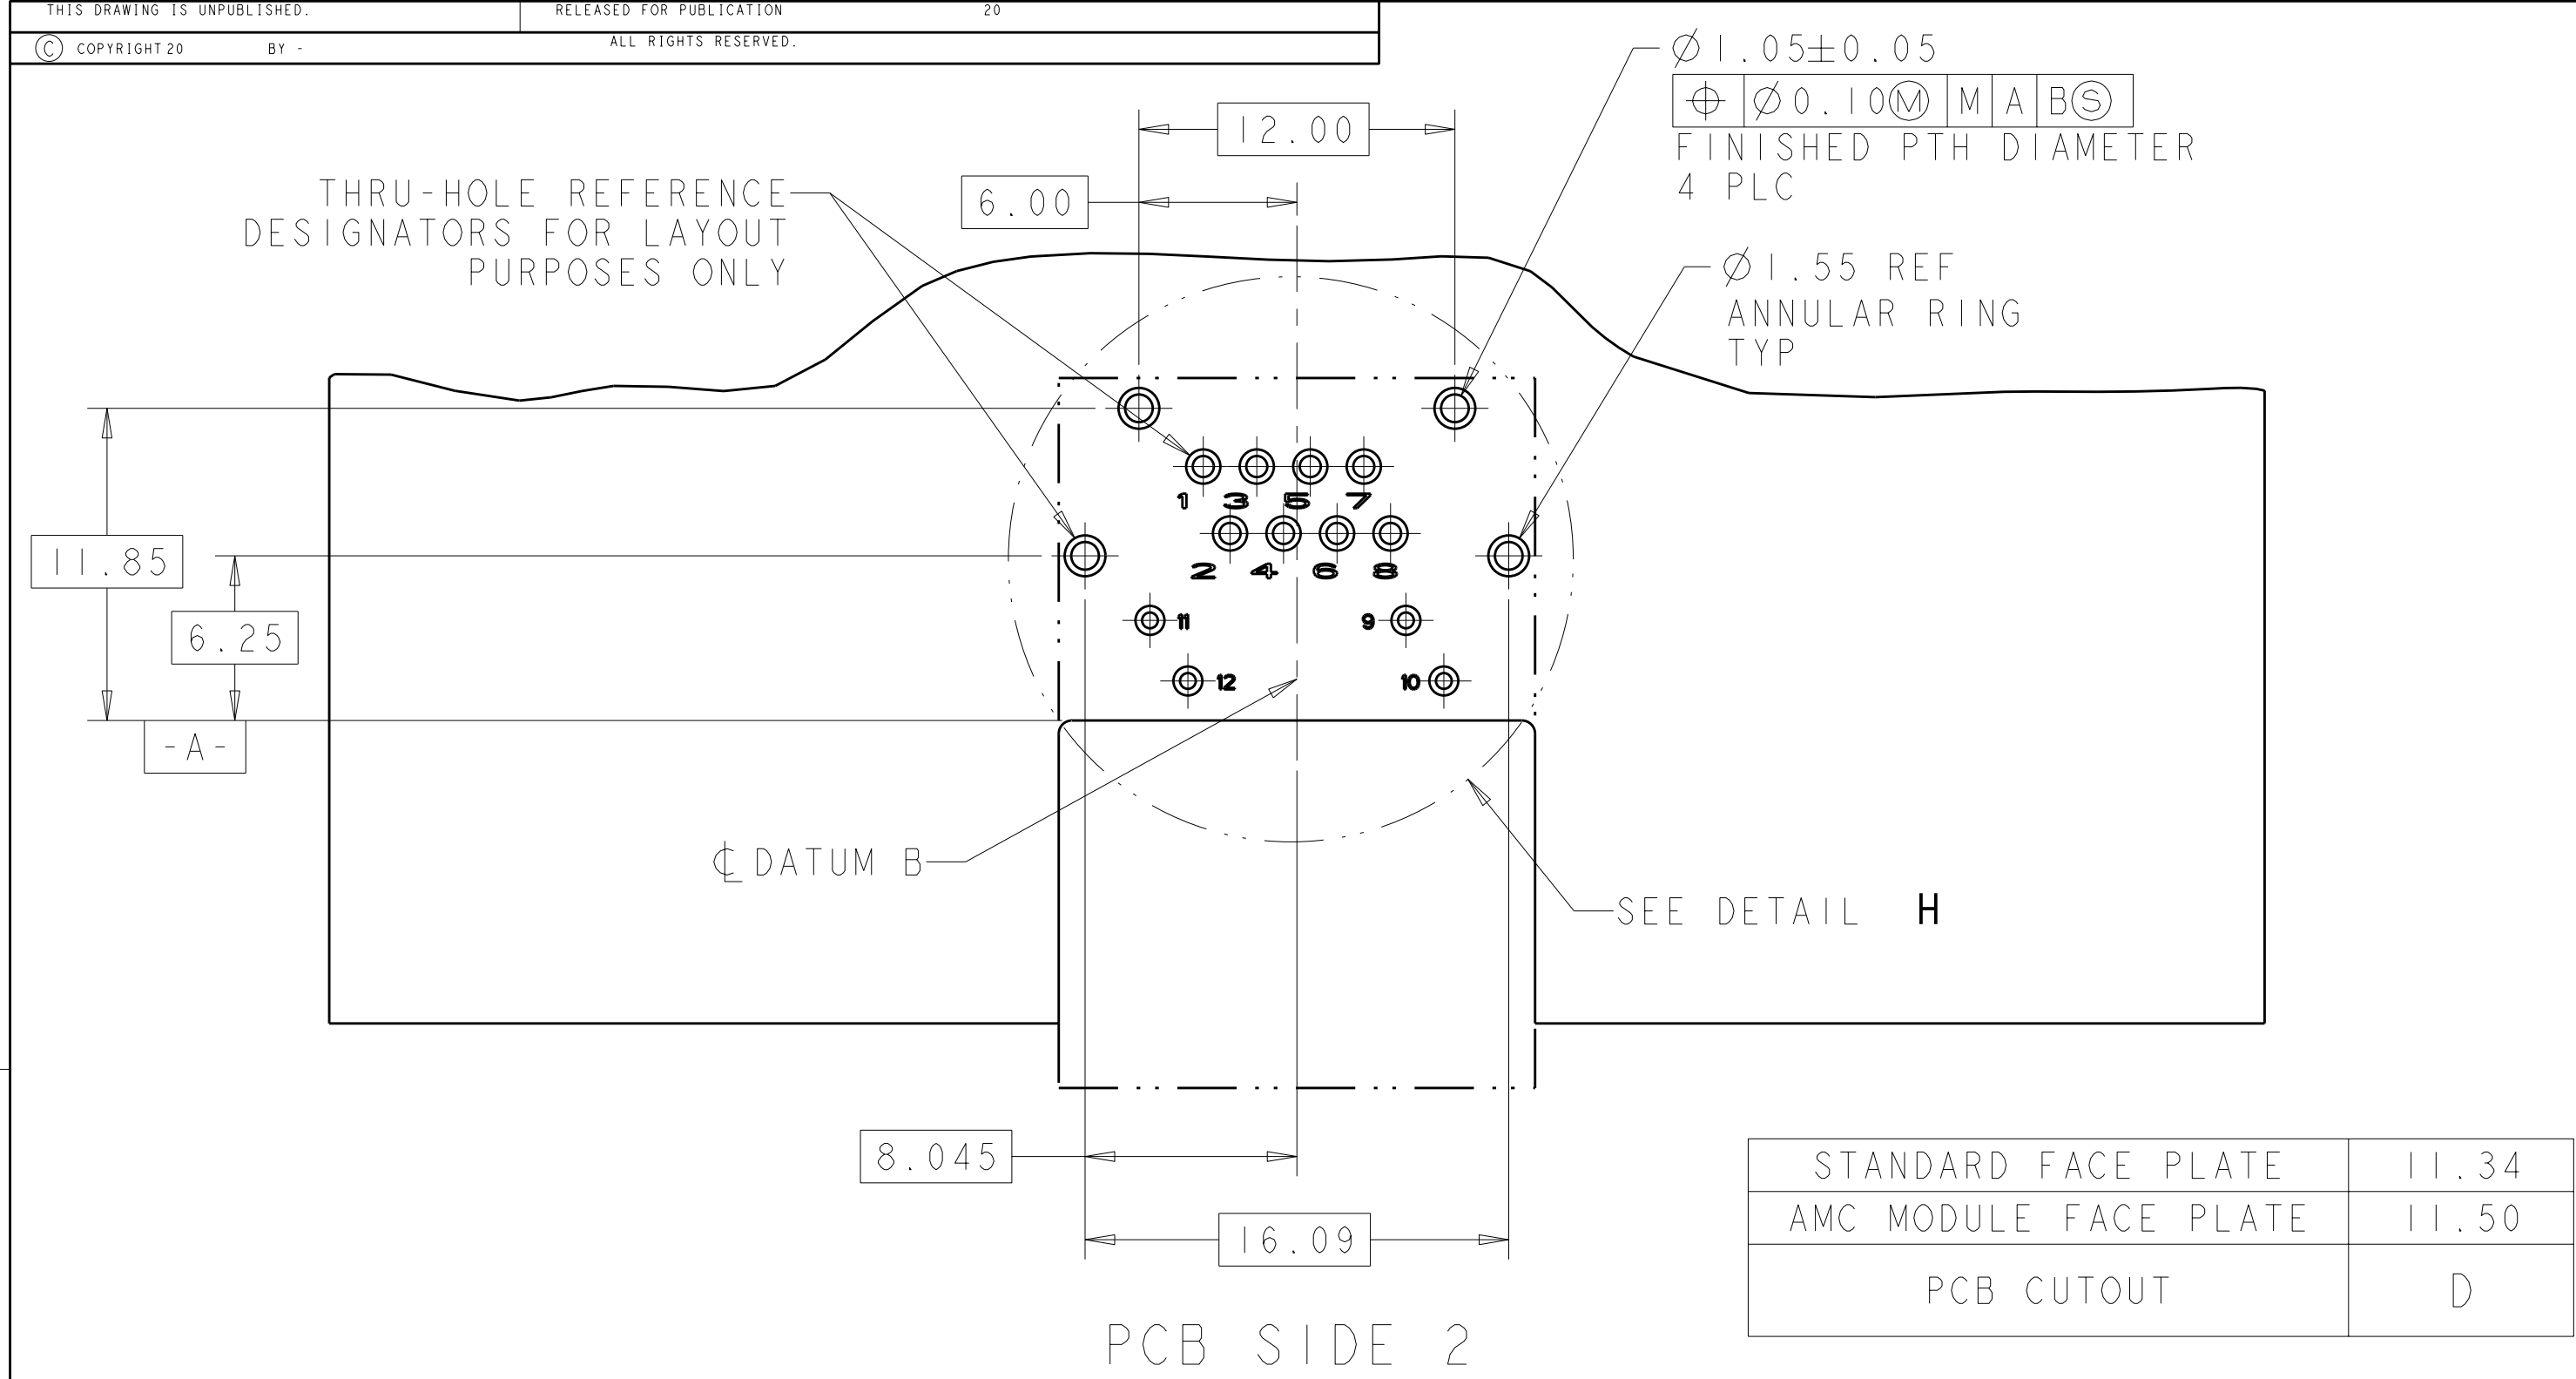


	PIN #	1888250-1	1888250-2	1888250-3	1888250-4	1888250-5
LED 1	9	CATHODE (-)	ANODE (YEL), CATHODE (GRN)	-	CATHODE (-)	CATHODE (-)
	10	ANODE (+)	ANODE (GRN), CATHODE (YEL)	-	ANODE (+)	ANODE (+)
LED 2	11	ANODE (+)	ANODE (GRN), CATHODE (YEL)	-	ANODE (+)	ANODE (+)
	12	CATHODE (-)	ANODE (YEL), CATHODE (GRN)	-	CATHODE (-)	CATHODE (-)

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: MS/L.A.MAYER	15FEB2008	TE Connectivity	
DIMENSIONS:		CHK: J.WESTMAN	15FEB2008	NAME: CONNECTOR ASSEMBLY, LOW PROFILE, PRESS FIT, MODULAR JACK, 1X1, RJ45	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.FLICKINGER	15FEB2008	SIZE: CAGE CODE: DRAWING NO: A100779	
mm		PRODUCT SPEC		RESTRICTED TO	
9 PLC ±		108-2274		C=1888250	
3 PLC ±0.13		APPLICATION SPEC		SCALE: 5:1	
3 PLC ±		114-13179		SHEET 2 OF 3	
4 PLC ±		WEIGHT: -		REV C	
ANGLES ±°		CUSTOMER DRAWING			
FINISH SEE NOTE 1					


LOC		DIST		REVISIONS				
AA	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		-	-	SEE SHEET 1	-	-	-	

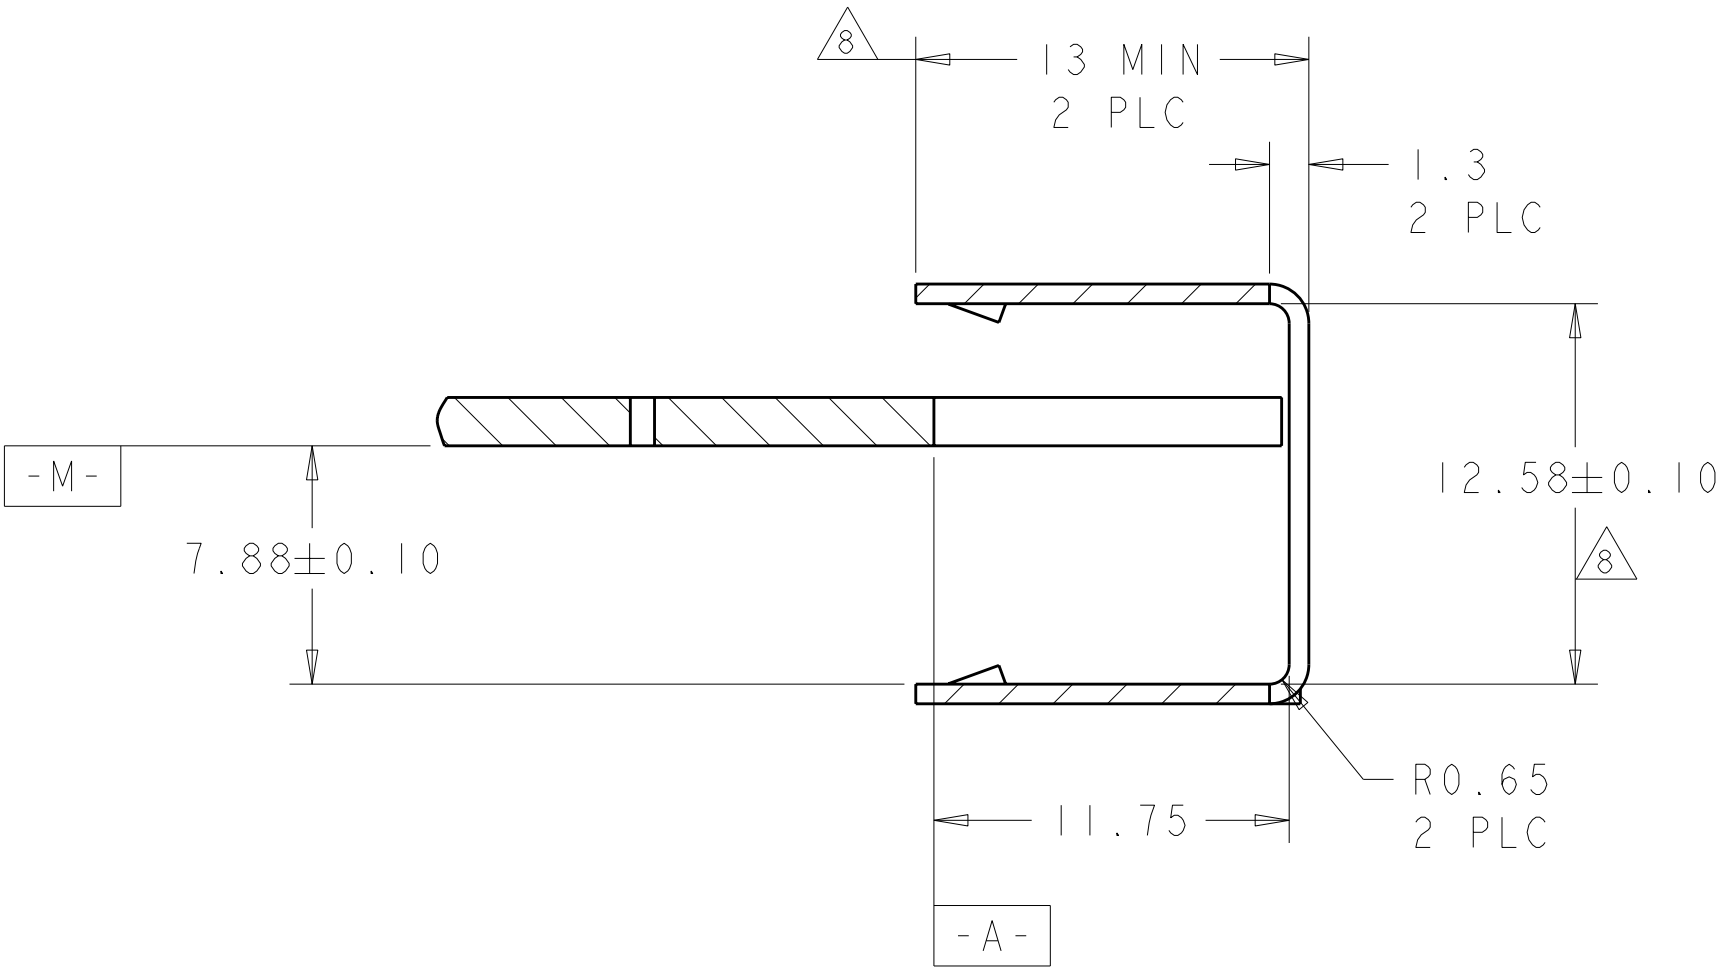


SECTION Z-Z

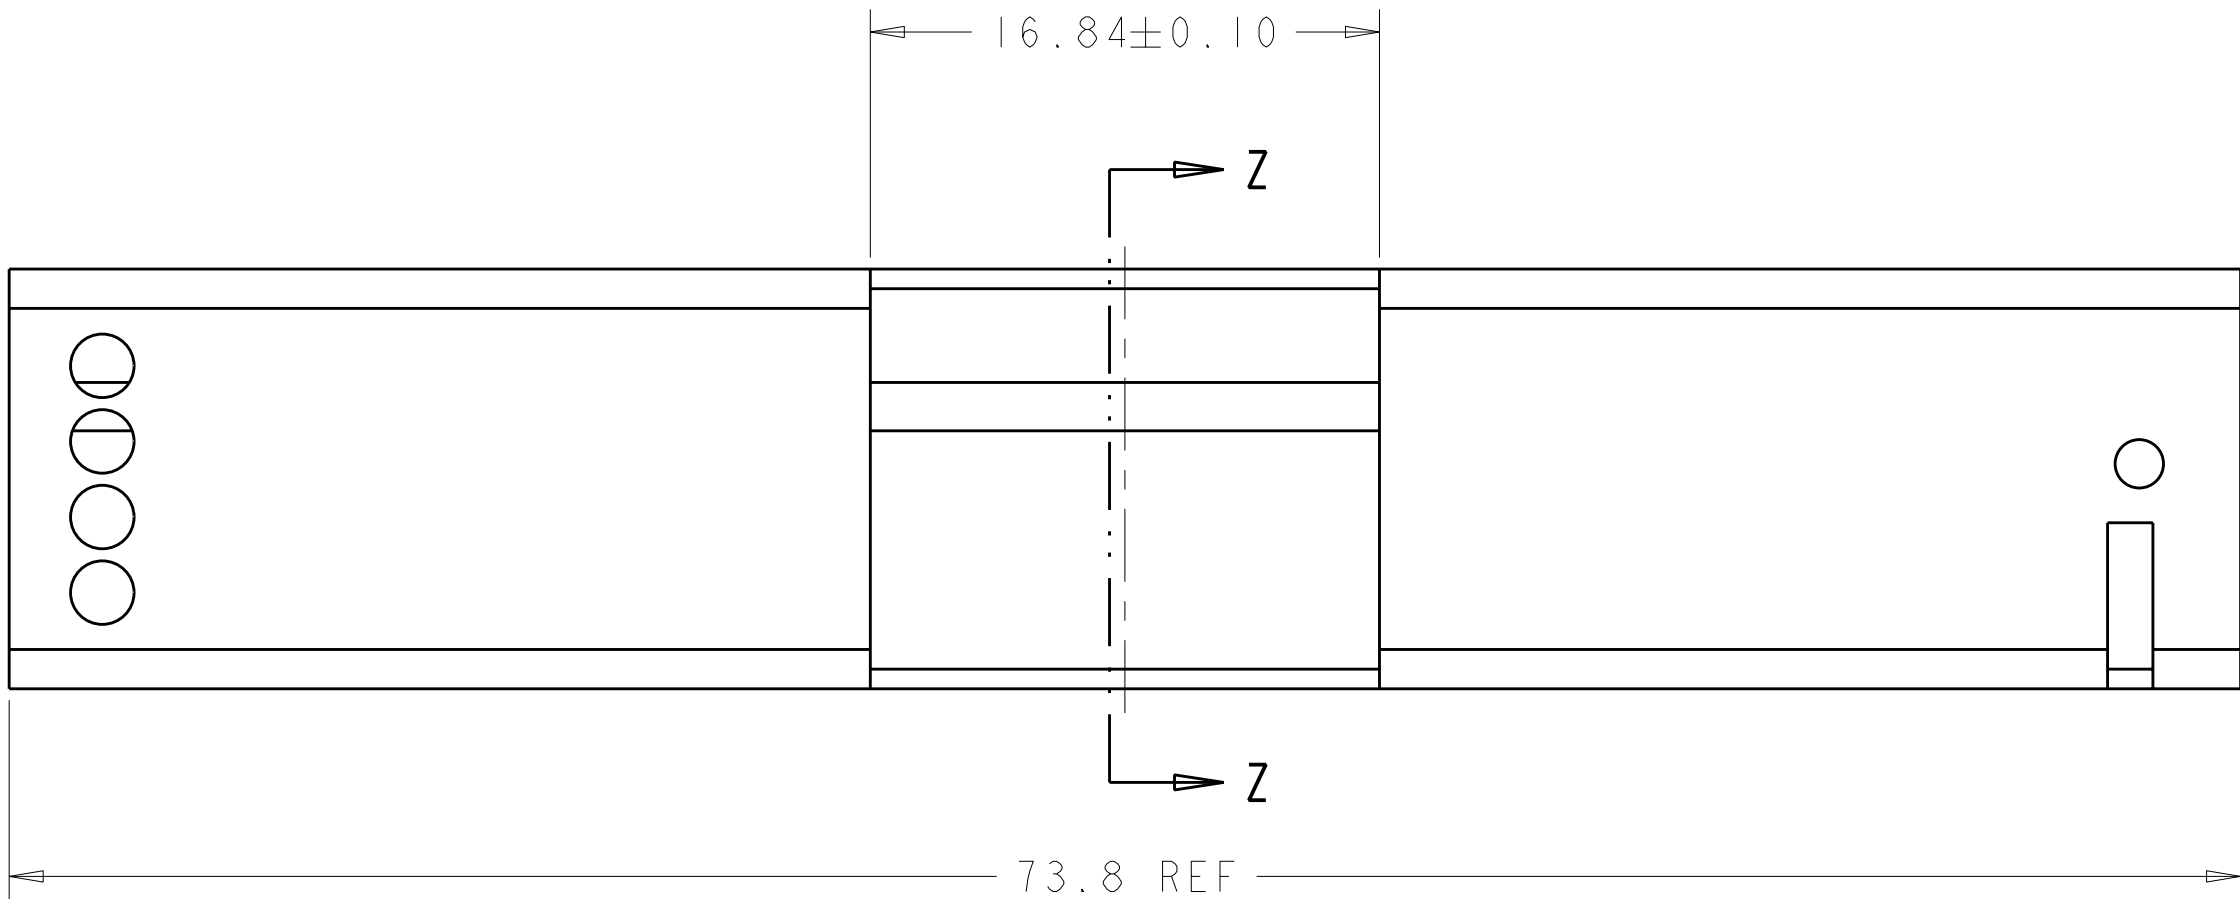


AMC SINGLE WIDTH, HALF HEIGHT MODULE FACE PLATE
SCALE 4:1

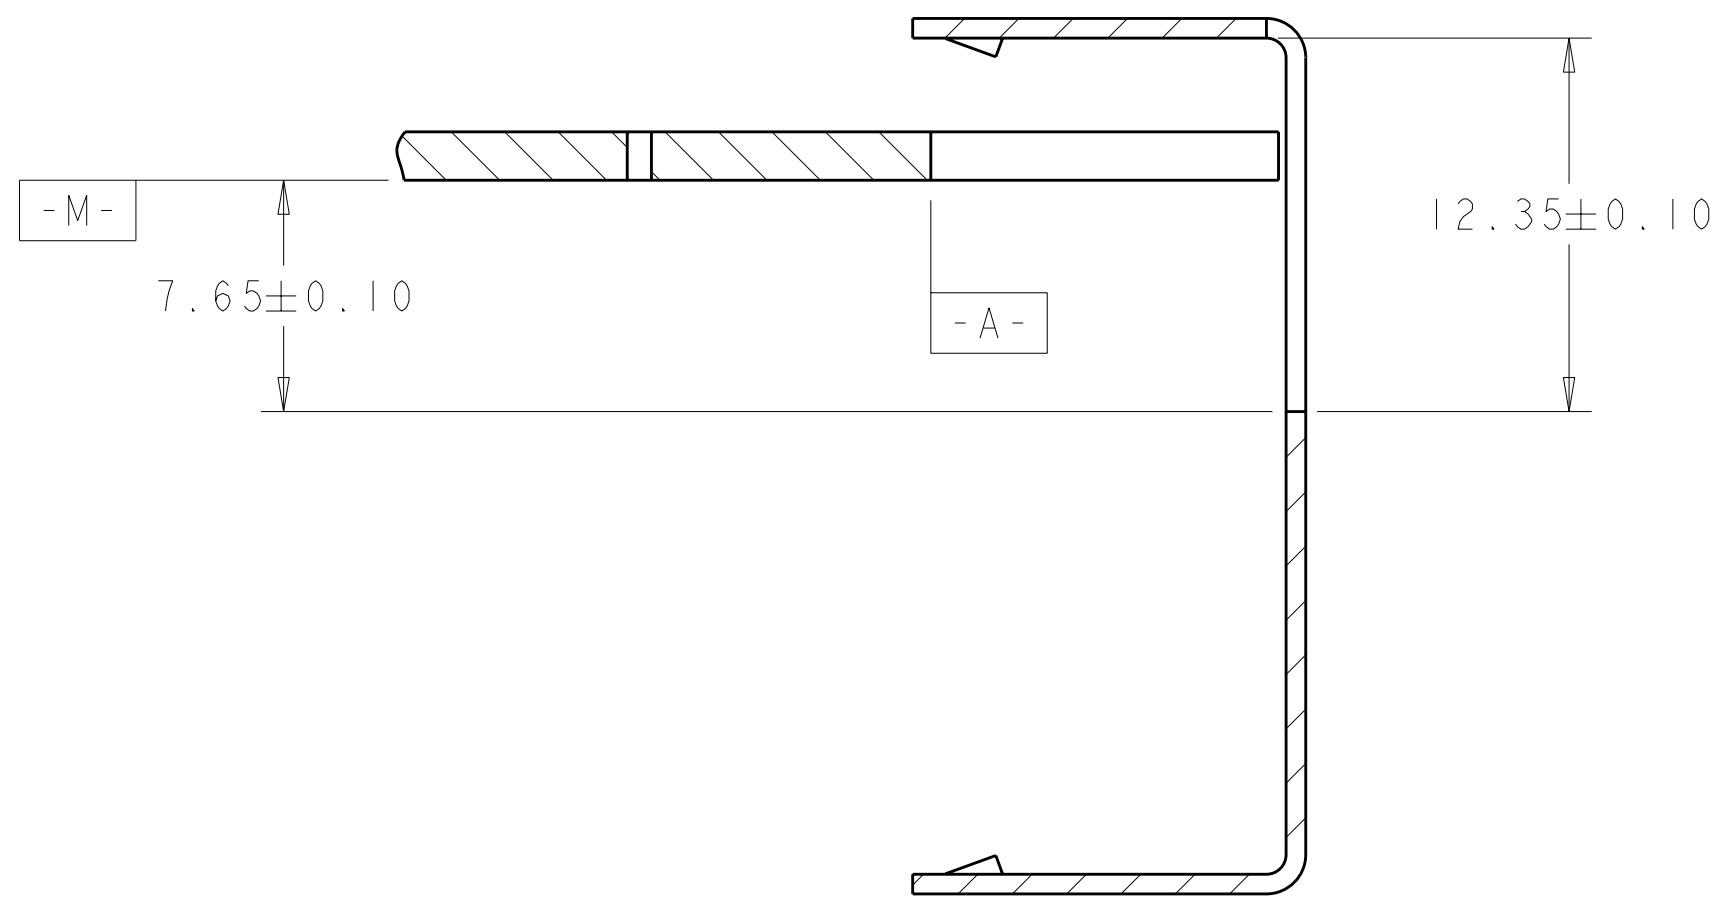


SECTION Y-Y

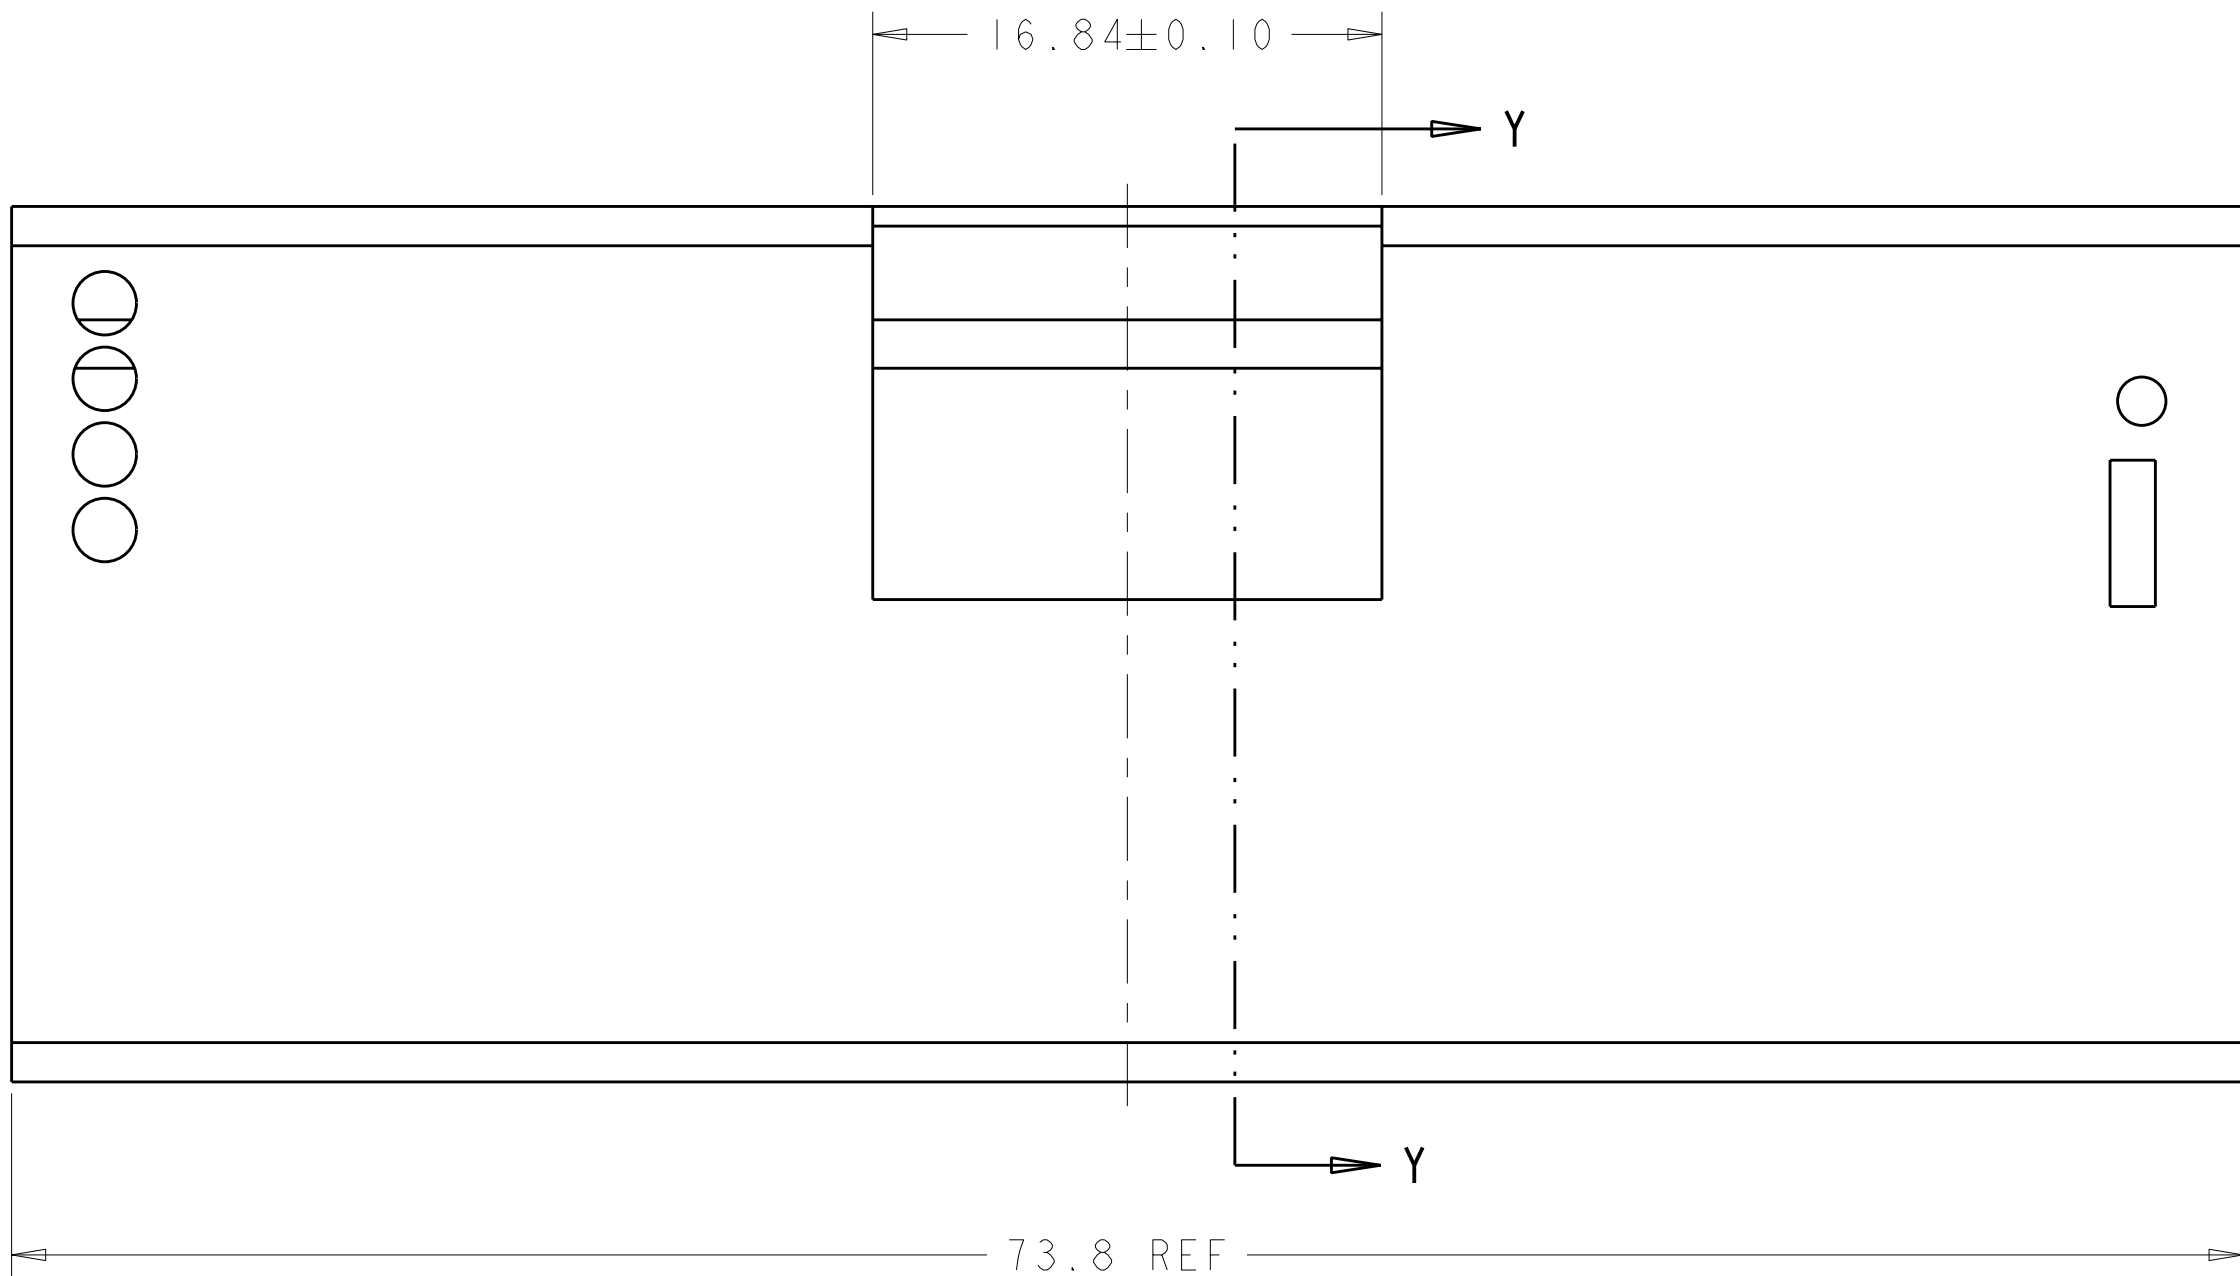

AMC SINGLE WIDTH, FULL HEIGHT MODULE FACE PLATE
SCALE 4:1

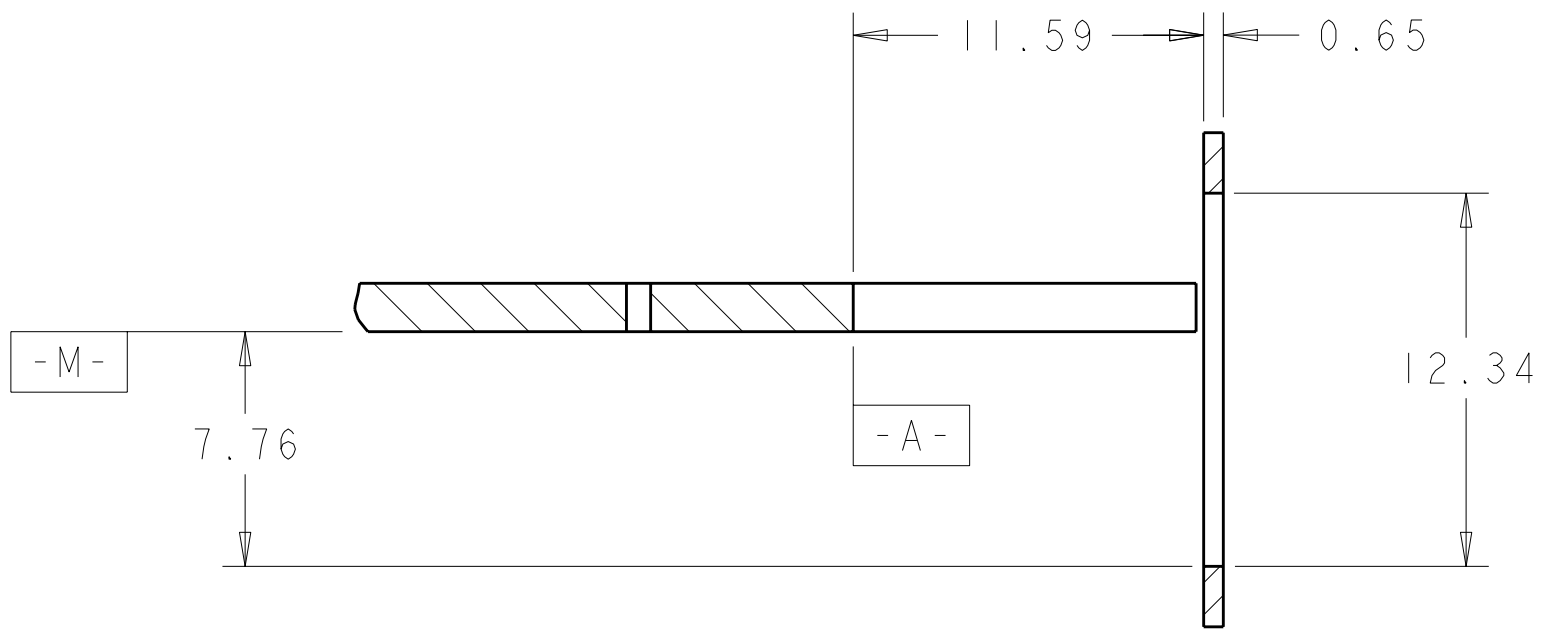

SECTION X-X

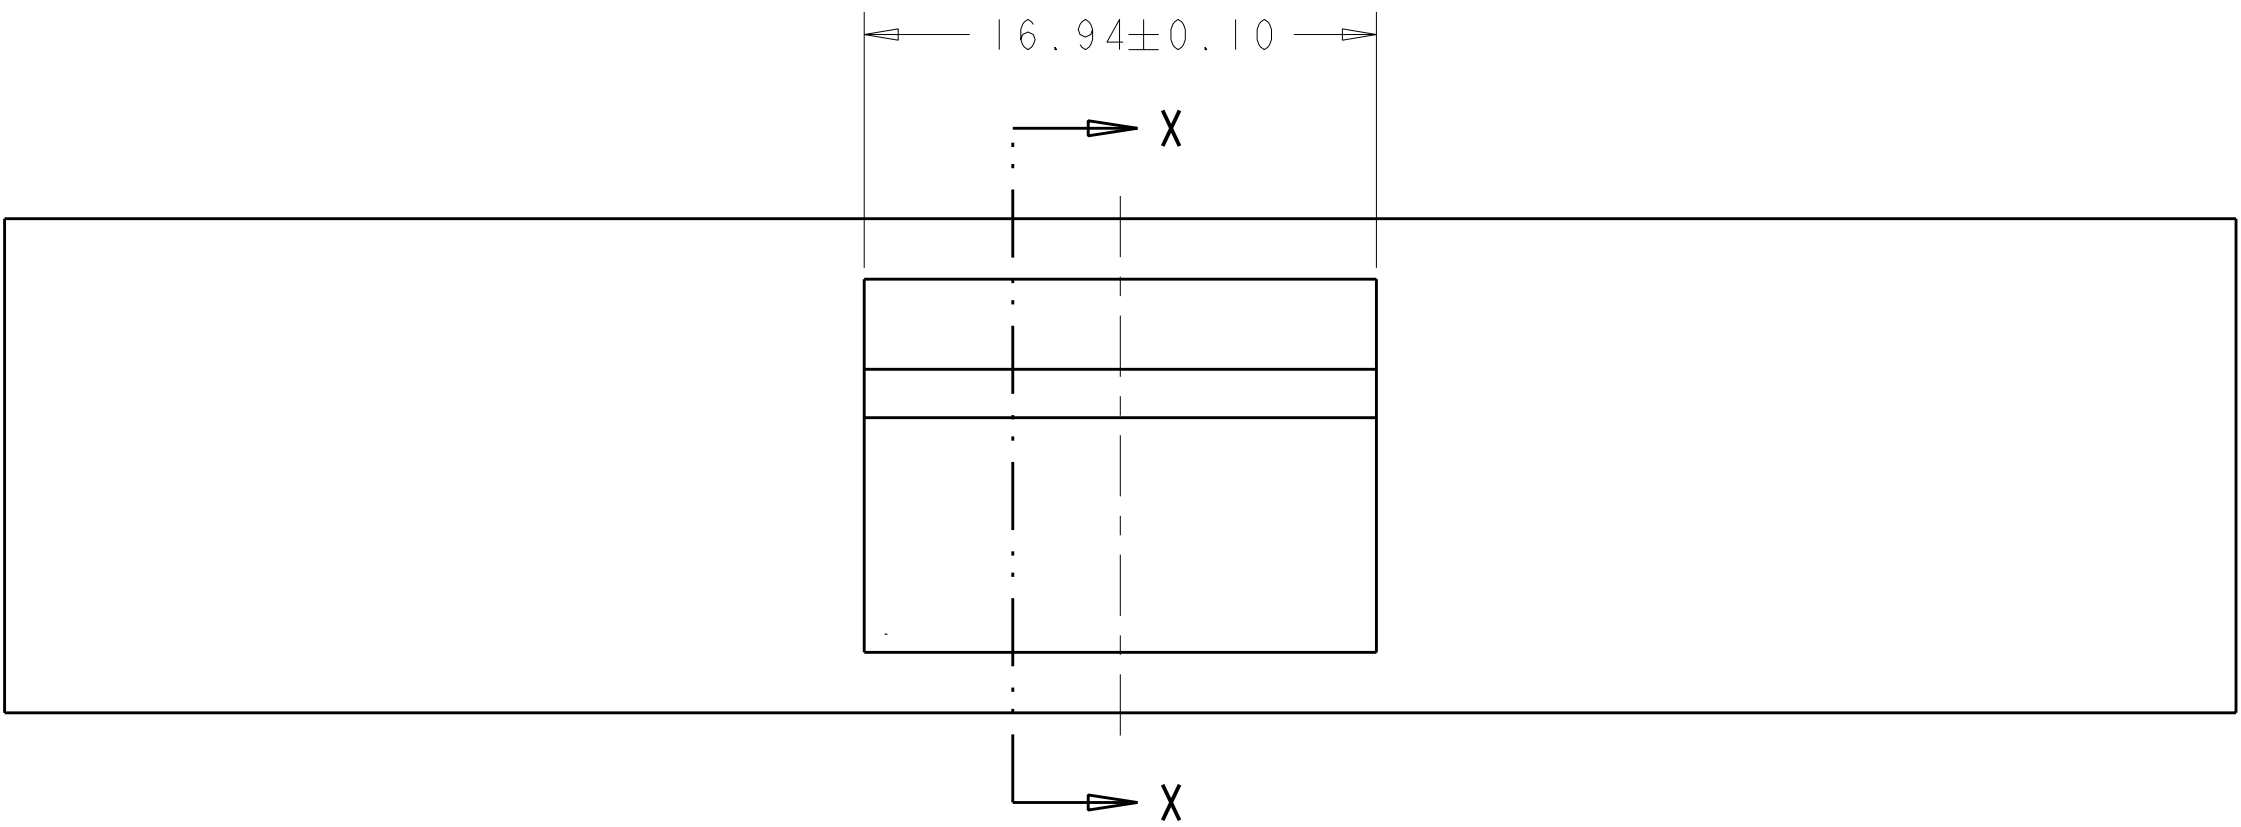

STANDARD FACE PLATE
SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: MS/L.A.MAYER 15FEB2008	TE Connectivity	
DIMENSIONS:		CHK: J.WESTMAN 15FEB2008		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD: S.CLICKINGER 15FEB2008	NAME: CONNECTOR ASSEMBLY, LOW PROFILE, PRESS FIT, MODULAR JACK, 1X1, RJ45	
	9 PLC ±	PRODUCT SPEC	SIZE: CAGE CODE: DRAWING NO: RESTRICTED TO:	
	3 PLC ±0.13	108-2274	A100779C-1888250	
	5 PLC ±	APPLICATION SPEC	SCALE: 5:1 SHEET 3 OF 3 REV C	
	4 PLC ±	114-13179		
MATERIAL: SEE NOTE 1	FINISH: SEE NOTE 1	WEIGHT: -	CUSTOMER DRAWING	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.