


- Compact DIP-16-package
- I/O isolation 5000 VAC rated for 250 VAC working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2xMOPP and operation to 5000 m altitude
- Low leakage current < 2  $\mu$ A
- Extended operating temperature range -40°C to 95°C.
- 5-year product warranty



ES 60601-1 IEC 60601-1  
UL 62368-1 IEC 62368-1

The TIM 2 series is a range of 2 Watt DC/DC converters in compact DIP-16 package with reinforced isolation of 5000 VAC for medical applications. With a low leakage current of less than 2  $\mu$ A the converters are predestined to insulate electrical equipment from the applied parts to patient (BF classification). The models are approved to IEC/EN/ES 60601-1 3rd ed. for 2xMOPP up to an altitude of 5000 m and come along with an ISO 14971 risk management file.

Models						
Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
TIM 2-0910	4.5 - 12 VDC (9 VDC nom.)	3.3 VDC	600 mA			75 %
TIM 2-0911		5 VDC	400 mA			78 %
TIM 2-0919		9 VDC	222 mA			78 %
TIM 2-0912		12 VDC	167 mA			82 %
TIM 2-0913		15 VDC	134 mA			82 %
TIM 2-0915		24 VDC	83 mA			82 %
TIM 2-0922		+12 VDC	83 mA	-12 VDC	83 mA	82 %
TIM 2-0923		+15 VDC	67 mA	-15 VDC	67 mA	80 %
TIM 2-1210	9 - 18 VDC (12 VDC nom.)	3.3 VDC	600 mA			76 %
TIM 2-1211		5 VDC	400 mA			78 %
TIM 2-1219		9 VDC	222 mA			79 %
TIM 2-1212		12 VDC	167 mA			82 %
TIM 2-1213		15 VDC	134 mA			82 %
TIM 2-1215		24 VDC	83 mA			81 %
TIM 2-1222		+12 VDC	83 mA	-12 VDC	83 mA	81 %
TIM 2-1223		+15 VDC	67 mA	-15 VDC	67 mA	81 %
TIM 2-2410	18 - 36 VDC (24 VDC nom.)	3.3 VDC	600 mA			76 %
TIM 2-2411		5 VDC	400 mA			79 %
TIM 2-2419		9 VDC	222 mA			80 %
TIM 2-2412		12 VDC	167 mA			81 %
TIM 2-2413		15 VDC	134 mA			81 %
TIM 2-2415		24 VDC	83 mA			81 %
TIM 2-2422		+12 VDC	83 mA	-12 VDC	83 mA	81 %
TIM 2-2423		+15 VDC	67 mA	-15 VDC	67 mA	81 %
TIM 2-4810	36 - 75 VDC (48 VDC nom.)	3.3 VDC	600 mA			76 %
TIM 2-4811		5 VDC	400 mA			78 %
TIM 2-4819		9 VDC	222 mA			79 %
TIM 2-4812		12 VDC	167 mA			80 %
TIM 2-4813		15 VDC	134 mA			82 %
TIM 2-4815		24 VDC	83 mA			81 %
TIM 2-4822		+12 VDC	83 mA	-12 VDC	83 mA	81 %
TIM 2-4823		+15 VDC	67 mA	-15 VDC	67 mA	81 %

## Input Specifications

Input Current	- At no load	9 Vin models: <b>80 mA typ.</b> 12 Vin models: <b>40 mA typ.</b> 24 Vin models: <b>25 mA typ.</b> 48 Vin models: <b>12 mA typ.</b>
Surge Voltage		9 Vin models: <b>15 VDC max.</b> (1 s max.) 12 Vin models: <b>25 VDC max.</b> (1 s max.) 24 Vin models: <b>50 VDC max.</b> (1 s max.) 48 Vin models: <b>100 VDC max.</b> (1 s max.)
Under Voltage Lockout		9 Vin models: <b>2 VDC min. / 3 VDC typ. / 4 VDC max.</b> 12 Vin models: <b>6 VDC min. / 7 VDC typ. / 8 VDC max.</b> 24 Vin models: <b>13 VDC min. / 15 VDC typ. / 17 VDC max.</b> 48 Vin models: <b>29 VDC min. / 32 VDC typ. / 35 VDC max.</b>
Recommended Input Fuse		9 Vin models: <b>1'000 mA</b> (slow blow) 12 Vin models: <b>500 mA</b> (slow blow) 24 Vin models: <b>315 mA</b> (slow blow) 48 Vin models: <b>160 mA</b> (slow blow)
Input Filter		<b>Internal Capacitor</b>

## Output Specifications

Voltage Set Accuracy		<b>±1% max.</b>
Regulation	- Input Variation (Vmin - Vmax)	single output models: <b>0.2% max.</b> dual output models: <b>0.2% max.</b>
	- Load Variation (10 - 90%)	single output models: <b>0.5% max.</b> dual output models: <b>0.8% max.</b> (Output 1) <b>0.8% max.</b> (Output 2)
	- Cross Regulation (25% / 100% asym. load)	dual output models: <b>5% max.</b>
Ripple and Noise	- 20 MHz Bandwidth	<b>50 mVp-p typ.</b>
Capacitive Load	- single output	3.3 Vout models: <b>1'000 µF max.</b> 5 Vout models: <b>1'000 µF max.</b> 9 Vout models: <b>430 µF max.</b> 12 Vout models: <b>220 µF max.</b> 15 Vout models: <b>170 µF max.</b> 24 Vout models: <b>100 µF max.</b>
	- dual output	12 / -12 Vout models: <b>170 / 170 µF max.</b> 15 / -15 Vout models: <b>100 / 100 µF max.</b>
Minimum Load		<b>Not required</b>
Temperature Coefficient		<b>±0.02 %/K max.</b>
Start-up Time		<b>10 ms typ. / 20 ms max.</b>
Short Circuit Protection		<b>Continuous, Automatic recovery</b>
Overload Protection		<b>Foldback Mode</b>
Overvoltage Protection		<b>104 - 197% of Vout nom.</b> (depending on model) <b>4 - 6.5 VDC</b> (3.3 Vout models) <b>6 - 8 VDC</b> (5 Vout models) <b>10 - 14 VDC</b> (9 Vout models) <b>13 - 19 VDC</b> (12 Vout models) <b>16 - 22 VDC</b> (15 Vout models) <b>25 - 35 VDC</b> (24 Vout models)
Transient Response	- Response Time	<b>500 µs typ.</b> (25% Load Step)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

## Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Medical Equipment	EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 2 x MOPP (Means Of Patient Protection)
	- Certification Documents	<a href="http://www.tracopower.com/overview/tim2">www.tracopower.com/overview/tim2</a>
Pollution Degree		PD 2

## EMC Specifications

EMI Emissions	- Conducted Emissions	EN 60601-1-2 edition 4 (Medical Devices) EN 55011 class B (with external filter) EN 55032 class B (with external filter) FCC Part 18, class B
	- Radiated Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter) FCC Part 18, class B
		External filter proposal: <a href="http://www.tracopower.com/overview/tim2">www.tracopower.com/overview/tim2</a>
EMS Immunity	- Electrostatic Discharge	EN 60601-1-2 edition 4 (Medical Devices) Air: EN 61000-4-2, $\pm 15$ kV, perf. criteria A Contact: EN 61000-4-2, $\pm 8$ kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 1$ kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: 9 Vin models: KY 1000 $\mu$ F // TVS SMDJ18A 12 Vin models: KY 470 $\mu$ F 24 Vin models: KY 470 $\mu$ F 48 Vin models: KY 220 $\mu$ F
	- PF Magnetic Field	EN 61000-4-6, 10 Vrms, perf. criteria A Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

## General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +95°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	6.67 %/K above 90°C
Cooling System		Natural convection (20 LFM)
Remote Control	- Current Controlled Remote	On: open circuit Off: 2 to 4 mA current (internal 1 kOhm resistor)
	- Off Idle Input Current	External circuit proposal: <a href="http://www.tracopower.com/info/current-remote.pdf">www.tracopower.com/info/current-remote.pdf</a> 2.5 mA typ.
Altitude During Operation		5'000 m max.
Switching Frequency		100 kHz min. (RCC)
Insulation System		Reinforced Insulation
Working Voltage (rated)		250 VAC
Isolation Test Voltage	- Input to Output, 60 s	5'000 VAC
Creepage	- Input to Output	8 mm min.
Clearance	- Input to Output	8 mm min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	16 pF typ. 20 pF max.
Leakage Current	- Touch Current	2 $\mu$ A max. (at 240 VAC / 60 Hz)
Reliability	- Calculated MTBF	6'809'000 h (MIL-HDBK-217F, ground benign)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.


Environment	- Vibration - Mechanical Shock - Thermal Shock	MIL-STD-810F MIL-STD-810F MIL-STD-810F
Housing Material		Non-conductive Plastic (UL94 V-0 rated)
Base Material		Non-conductive Plastic (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Copper
Pin Foundation Plating		Nickel (1 - 3 $\mu\text{m}$ )
Pin Surface Plating		Tin (7 - 12 $\mu\text{m}$ ), matte
Soldering Profile		260°C / 10 s max.
Connection Type		THD (Through-Hole Device)
Weight		7 g
Environmental Compliance	- Reach - RoHS	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a>

### Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/tim2](http://www.tracopower.com/overview/tim2)

### Outline Dimensions

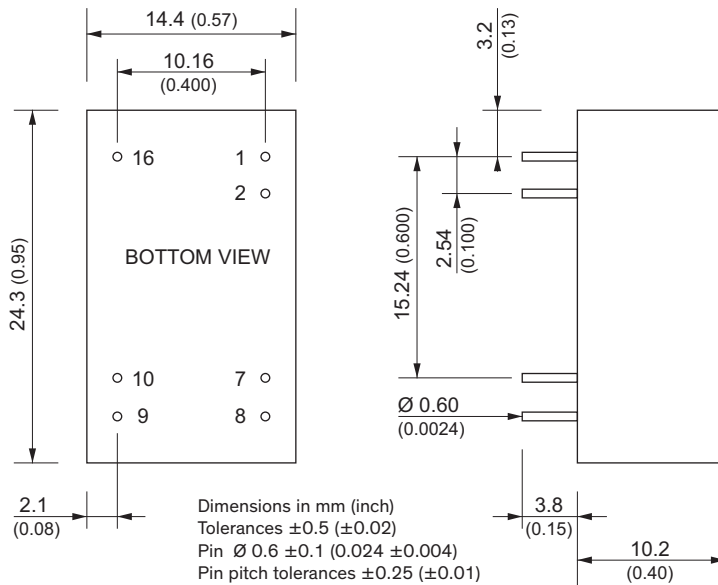

Pinout		
Pin	Single Output	Dual Output
1	-Vin (GND)	-Vin (GND)
2	Remote	Remote
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin (Vcc)	+Vin (Vcc)

NC: No Connection



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.