
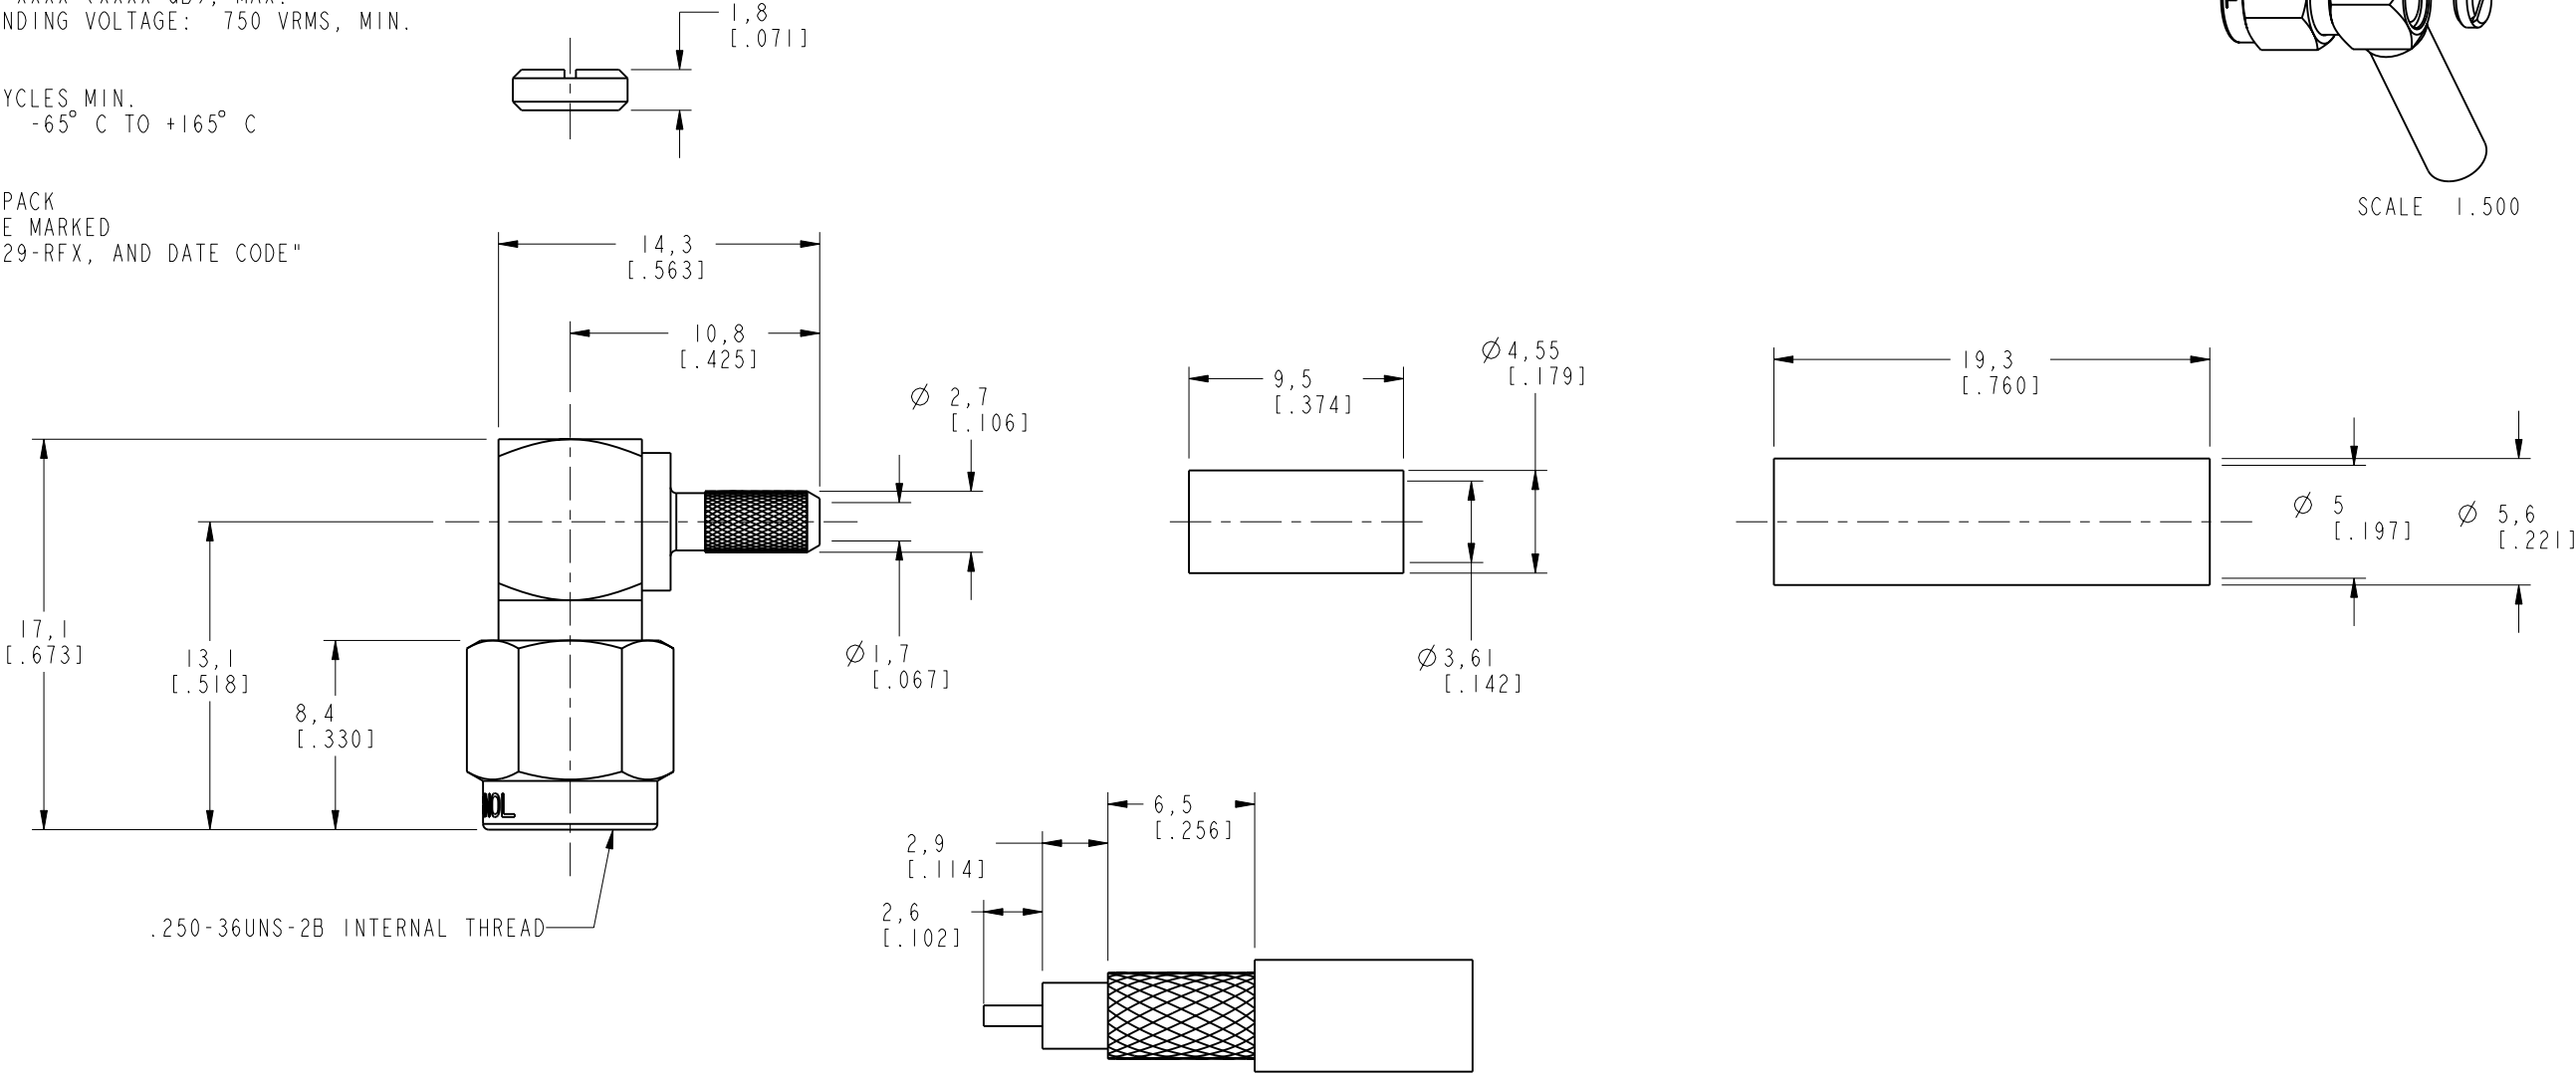


NOTES: 1. MATERIALS OF CONSTRUCTION: SHELL, HOUSING & COVER = BRASS, NICKEL PLATED (.000100 MIN THICK) CONTACT PIN = BRASS, GOLD PLATED (.000050 MIN THICK) RETAINER RING = BeCu, NATURAL FERRULE = COPPER, NICKEL PLATED (.000052 MIN THICK) INSULATOR = TEFLON, MIL-P-19468 GASKET = SILICONE RUBBER, COLOR RED HEAT SHRINK TUBING = COLOR BLACK 2. CRIMPED FERRULE = HEX CRIMP SIZE .151 CONTACT PIN TO SOLDER. 3. ELECTRICAL: A. IMPEDANCE: 50 OHM B. FREQUENCY RANGE: DC - 12.4 GHz C. VSWR(RETURN LOSS): XXXX (XXXX dB), MAX. D. DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS, MIN. 4. MECHANICAL: A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65° C TO +165° C 5. PACKAGING: A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED "AMPHENOL, 901-10029-RFX, AND DATE CODE"	901-10029-RFX		REVISIONS			
	DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
	THIRD ANGLE PROJ. 	B	RELEASE TO MFG.	9/14/01	43834	CPM
		C	SEE SHEET 1	8/6/04	45101	CPM
			 SCALE 1.500			
RECOMMENDED CABLE STRIPPING DIMENSIONS SCALE 3.000			CUSTOMER OUTLINE DRAWING ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM (INCHES) AND TOLERANCES ARE: 0.5 - 6mm ±0.2mm 6 - 30mm ±0.4mm 30 - 120mm ± 0.6mm			DRAWN C. McGRATH		DATE 8/20/01	
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.			ENGINEER O. BARTHELMES		DATE 8/20/01	
			APPROVED O. BARTHELMES		DATE 9/14/01	
			CAD FILE I:\SMA\901-10029-RFX		CODE ID 74868	DWG SIZE B
GEN# 901-9881-RFX_ASSY			TITLE SMA R/A CRIMP PLUG (FOR RG-316U/D CABLE)		DRAWING NO. 901-10029-RFX	
					SCALE: 3.0:1	SHEET 2 OF 2
					REV B	
			Amphenol Amphenol Corporation Communication and Network Products Division Danbury, CT U.S.A. 06810			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.