


Features

- ◆ Compact SIP package
- ◆ Very high efficiency up to 97%
- ◆ Excellent line / load regulation
- ◆ Low standby current
- ◆ Operating temperature range -40 to 90°C
- ◆ Over-temperature protection
- ◆ Remote On/Off input
- ◆ Adjustable output voltage
- ◆ Short circuit protection

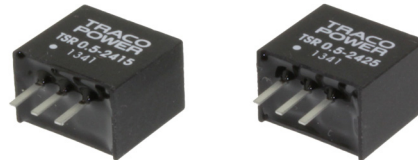

TSR-0.5 is a series of step-down non-isolated switching regulators in compact SIP package. These converters are an ideal drop-in replacement to LM78 linear regulators when energy efficiency is a parameter of the design. The high efficiency up to 97 % allows full load operation up to +80°C (+90°C with 50% load) ambient temperature without the need of forced aircooling.

Excellent output voltage accuracy and low standby current are other features that distinguish switching regulators from linear regulators.

Models

| Order code | Input voltage range ¹⁾ | Output voltage | | Output current max. | Efficiency typ. | |
|---------------|-----------------------------------|----------------|--------------------------|------------------------|-----------------|-------------|
| | | nominal | trim range ²⁾ | | @ Vin min. | @ Vin 32VDC |
| TSR 0.5-2415 | 4.75 – 32 VDC | 1.5 VDC | – | 0.5 A | 73 % | 63 % |
| TSR 0.5-2418 | | 1.8 VDC | 1.5 – 3.0 VDC | | 82 % | 71 % |
| TSR 0.5-2425 | | 2.5 VDC | 1.5 – 3.0 VDC | | 87 % | 77 % |
| TSR 0.5-2433 | | 3.3 VDC | 3.0 – 5.5 VDC | | 91 % | 81 % |
| TSR 0.5-2450 | 6.5 – 32 VDC | 5.0 VDC | 3.0 – 8.0 VDC | | 94 % | 86 % |
| TSR 0.5-2465 | 8 – 32 VDC | 6.5 VDC | 3.3 – 11 VDC | | 95 % | 88 % |
| TSR 0.5-2490 | 11 – 32 VDC | 9.0 VDC | 4.5 – 12.6 VDC | | 96 % | 92 % |
| TSR 0.5-24120 | 15 – 32 VDC | 12 VDC | 4.5 – 15 VDC | | 97 % | 94 % |
| TSR 0.5-24150 | 18 – 32 VDC | 15 VDC | – | | 97 % | 95 % |

1) For input voltage higher 24 VDC an input capacitor 22 µF/ 50 V is required

Input Specifications

| | |
|----------------------------------|---|
| No load input current (at 24Vin) | 5 mA typ. |
| Short circuit input power | 1.5 W max. |
| Surge voltage | -0.3 / 34 VDC max. |
| Input filter | internal capacitor, see filter suggestion page 3 for to meet EN55022 class A, class B |

Output Specifications

| | | | | | | | | | | | | | |
|--|---|------------------------|------------------------|-----------------|---------------|---------------|-------|-------------------------------|------------------------|-------|--|---------------|-------|
| Voltage set accuracy | ±3 % (at full load) | | | | | | | | | | | | |
| Regulation | <table border="0"> <tr> <td>– Input variation</td> <td>1.5 to 6.5 Vin models:</td> <td>0.4 %</td> </tr> <tr> <td></td> <td>other models:</td> <td>0.2 %</td> </tr> <tr> <td>– Load variation (10 – 100 %)</td> <td>1.5 to 6.5 Vin models:</td> <td>0.6 %</td> </tr> <tr> <td></td> <td>other models:</td> <td>0.4 %</td> </tr> </table> | – Input variation | 1.5 to 6.5 Vin models: | 0.4 % | | other models: | 0.2 % | – Load variation (10 – 100 %) | 1.5 to 6.5 Vin models: | 0.6 % | | other models: | 0.4 % |
| – Input variation | 1.5 to 6.5 Vin models: | 0.4 % | | | | | | | | | | | |
| | other models: | 0.2 % | | | | | | | | | | | |
| – Load variation (10 – 100 %) | 1.5 to 6.5 Vin models: | 0.6 % | | | | | | | | | | | |
| | other models: | 0.4 % | | | | | | | | | | | |
| Minimum load | not required | | | | | | | | | | | | |
| Ripple and noise | <table border="0"> <tr> <td>1.5 to 6.5 Vin models:</td> <td>30 mVp-p max.</td> </tr> <tr> <td>other models:</td> <td>40 mVp-p max.</td> </tr> </table> | 1.5 to 6.5 Vin models: | 30 mVp-p max. | other models: | 40 mVp-p max. | | | | | | | | |
| 1.5 to 6.5 Vin models: | 30 mVp-p max. | | | | | | | | | | | | |
| other models: | 40 mVp-p max. | | | | | | | | | | | | |
| Temperature coefficient | ±0.015 %/K max. | | | | | | | | | | | | |
| Dynamic load (50% load step change) | <table border="0"> <tr> <td>– Peak variation</td> <td>±2 % max.</td> </tr> <tr> <td>– Response time</td> <td>100 µS max.</td> </tr> </table> | – Peak variation | ±2 % max. | – Response time | 100 µS max. | | | | | | | | |
| – Peak variation | ±2 % max. | | | | | | | | | | | | |
| – Response time | 100 µS max. | | | | | | | | | | | | |
| Short circuit protection | continuous, automatic recovery | | | | | | | | | | | | |
| Current limitation | 1.0 A max. | | | | | | | | | | | | |
| Capacitive load | 220 µF max. | | | | | | | | | | | | |

General Specifications

| | | | | | | | |
|---|---|-------------|--|--------------------|---------------------------|-----------|-----------------|
| Temperature ranges | <table border="0"> <tr> <td>– Operating</td> <td>–40°C to +90°C</td> </tr> <tr> <td>– Case temperature</td> <td>+100°C. max.</td> </tr> <tr> <td>– Storage</td> <td>–55°C to +125°C</td> </tr> </table> | – Operating | –40°C to +90°C | – Case temperature | +100°C. max. | – Storage | –55°C to +125°C |
| – Operating | –40°C to +90°C | | | | | | |
| – Case temperature | +100°C. max. | | | | | | |
| – Storage | –55°C to +125°C | | | | | | |
| Derating | – positive output circuit 5 %/K above +80°C | | | | | | |
| Overtemperature protection | at +160°C (on internal IC) | | | | | | |
| Humidity (non condensing) | 95 % rel H max. | | | | | | |
| Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign) | >2'000'000 h | | | | | | |
| Isolation voltage | none | | | | | | |
| Switching frequency | 330 kHz ±50 kHz (pulse width modulation) | | | | | | |
| Environmental compliance | <table border="0"> <tr> <td>– Reach</td> <td>www.tracopower.com/products/reach-declaration.pdf</td> </tr> <tr> <td>– RoHS</td> <td>RoHS directive 2011/65/EU</td> </tr> </table> | – Reach | www.tracopower.com/products/reach-declaration.pdf | – RoHS | RoHS directive 2011/65/EU | | |
| – Reach | www.tracopower.com/products/reach-declaration.pdf | | | | | | |
| – RoHS | RoHS directive 2011/65/EU | | | | | | |


Physical Specifications

| | |
|------------------|---|
| Casing material | non-conductive plastic (UL94V-0 rated) |
| Pin material | alloy 42 |
| Weight | 1.95 g (0.69 oz) |
| Lead temperature | 260°C |
| Washing | baking after washing: 100°C for 30 min. |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


Applications notes

EMI filter for EN 55022 class A & B

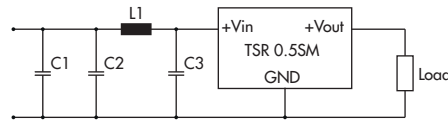

| Class | C1 | C2 & C3 | L1 value | order code (SMD type) | datasheet: |
|-------|------------------------------|------------------------------|-------------|-----------------------|--|
| A | - | 4.7 μ F / 50 V 1206 MLCC | 3.3 μ H | TCK-044 | www.tracopower.com/products/tck044.pdf |
| B | 4.7 μ F / 50 V 1206 MLCC | | 10 μ H | TCK-047 | www.tracopower.com/products/tck047.pdf |

Outline Dimensions

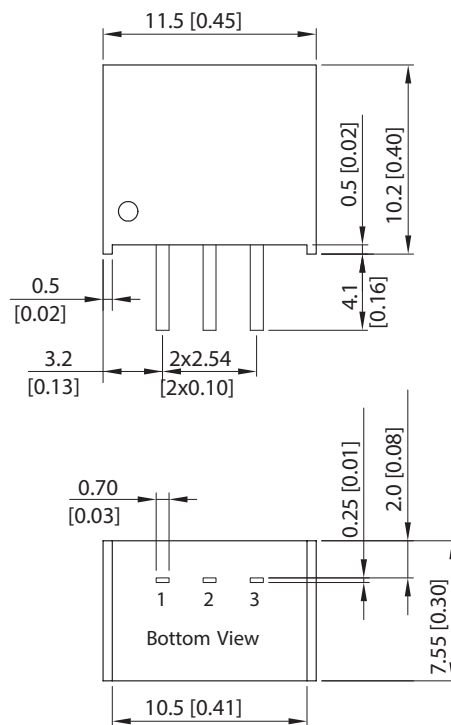

| Pinout | |
|--------|-------|
| 1 | +Vin |
| 2 | GND |
| 3 | +Vout |

Dimensions in [mm], () = Inch
Tolerances: ± 0.5 (± 0.02)
Pin pitch tolerances: ± 0.25 (± 0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.