

**PROGRAMMABLE HIGH SENSITIVITY
MICROPOWER OMNIPOLAR HALL-EFFECT SWITCH**
Description


The AH1894 is a high sensitivity micropower magnetic range selectable Omnipolar Hall effect switch IC with internal pull up and pull down capability. Designed for portable and battery powered equipment such as cellular phones and portable PCs to home appliances and industrial applications, the average power consumption is only 8uW at 1.85V. To support portable equipment the AH1894 can operate over the supply range of 1.6V to 3.6V and uses a hibernating clocking system to minimize the power consumption. To minimize PCB space the AH1894 is available in small low profile X1-DFN1216-4 and SOT553 packages.

The output is activated with either a north or south pole of sufficient magnetic field strength. The user can select one of two magnetic sensitivity bands via the BSEL pin without the addition of any external components allowing a flexible but small solution. The band select can be hardwired or be changed on the fly via a logic source such as a micro-controller. When the magnetic flux density (B) is larger than operate point (Bop), the output will be turned on (pulled low) and held until B is lower than release point (Brp).



Features

- Omnipolar Operation (North or South pole)
- Programmable Operate and Release Points
- Supply Voltage of 1.6V to 3.6V
- Micropower Operation
- Chopper Stabilized Design Provides:
 - Superior Temperature Stability
 - Minimal Switch Point Drift
 - Enhanced Immunity to Physical Stress
- No External Pull-up Resistors Required
- Good RF Noise Immunity
- -40°C to +85°C Operating Temperature
- High ESD capability of 8kV (Human Body Model) on V_{DD}, GND and OUTPUT Pins
- Small Low Profile X1-DFN1216-4 and SOT553 Packages
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
 2. See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

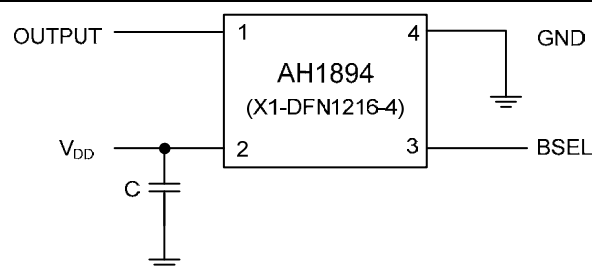Typical Applications Circuit


Note: 4. C_{IN} is for power stabilization and to strengthen the noise immunity, the recommended capacitance is 100nF typical.

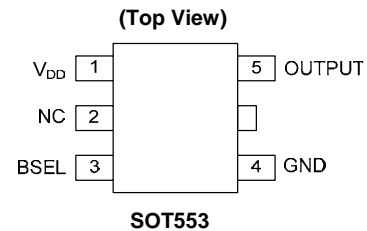Pin Assignments

Applications

- Open and Close Detect for Cellular Phones
- Holster or cover detect for cellular phones and Tablet PCs
- Cover or Display Switches in Portable PCs
- Digital Still, Video Cameras and Handheld Gaming Consoles
- Door, Lids and Tray Position Switches
- Level, Proximity and Position Switches
- Contact-Less Switches in Home Appliances and Industrial Applications

Pin Descriptions

Package: X1-DFN1216-4


| Pin Number | Pin Name | Function |
|------------|-----------------|--------------------|
| 1 | OUTPUT | Output Pin |
| 2 | V _{DD} | Power Supply Input |
| 3 | BSEL | Band Select |
| 4 | GND | Ground Pin |

Package: SOT553

| Pin Number | Pin Name | Function |
|------------|-----------------|------------------------|
| 1 | V _{DD} | Power Supply Input |
| 2 | NC | No Connection (Note 5) |
| 3 | BSEL | Band Select |
| 4 | GND | Ground |
| 5 | OUTPUT | Output |

Note: 5. NC is "No Connection" pin and is not connected internally. This pin can be left open or tied to ground.

Functional Block Diagram

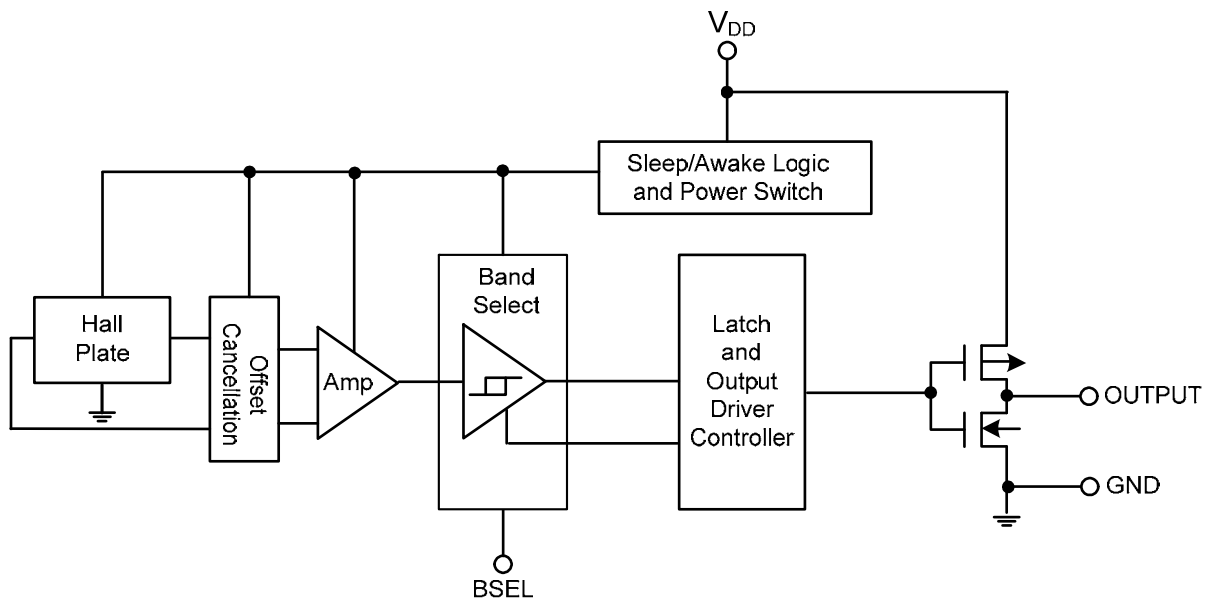

Absolute Maximum Ratings (Note 6) (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

| Symbol | Parameter | Rating | Unit | |
|---------------|---------------------------------------|--------------------------|------------------|----|
| V_{DD} | Supply Voltage (Note 7) | 6 | V | |
| V_{DD_REV} | Reverse Supply Voltage | -0.3 | V | |
| I_{OUTPUT} | Output current (source and sink) | 3.5 | mA | |
| B | Magnetic Flux Density | Unlimited | | |
| P_D | Package Power Dissipation | X1-DFN1216-4 | 230 | mW |
| | | SOT553 | 230 | mW |
| T_s | Storage Temperature Range | -65 to +150 | $^\circ\text{C}$ | |
| T_J | Maximum Junction Temperature | 150 | $^\circ\text{C}$ | |
| ESD HBM | Human Body Model (HBM) ESD capability | VDD, GND and OUTPUT pins | 8 | kV |
| | | BSEL pin | 6 | kV |

- Notes:
- Stresses greater than the 'Absolute Maximum Ratings' specified above may cause permanent damage to the device. These are stress ratings only; functional operation of the device at these or any other conditions exceeding those indicated in this specification is not implied. Device reliability may be affected by exposure to absolute maximum rating conditions for extended periods of time.
 - The absolute maximum V_{DD} of 6V is a transient stress rating and is not meant as a functional operating condition. It is not recommended to operate the device at the absolute maximum rated conditions for any period of time.

Recommended Operating Conditions (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)


| Symbol | Parameter | Conditions | Rating | Unit |
|----------|-----------------------------|------------|--------------|------------------|
| V_{DD} | Supply Voltage | Operating | 1.6V to 3.6V | V |
| T_A | Operating Temperature Range | Operating | -40 to +85 | $^\circ\text{C}$ |

Electrical Characteristics (@ $T_A = +25^\circ\text{C}$, $V_{DD} = 1.85\text{V}$, unless otherwise specified.)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------------------|--------------------------------------|--|--------------|--------------|-----|------------------|
| V_{OL} | Output Low Voltage (on) | $I_{OUT} = 1\text{mA}$ | — | 0.1 | 0.2 | V |
| V_{OH} | Output High Voltage (off) | $I_{OUT} = -1\text{mA}$ | $V_{DD}-0.2$ | $V_{DD}-0.1$ | — | V |
| I_{off} | Output Leakage Current | $V_{OUT} = 3.6\text{V}$, Output off | - | < 0.1 | 1 | μA |
| V_{SEL_LB} | BSEL pin input voltage – Low Band | | 0 | — | 0.5 | V |
| V_{SEL_HB} | BSEL pin input voltage – High Band | | 1.4 | — | 3.6 | V |
| R_{PD_BSEL} | BSEL pin internal pull-down resistor | (Note 8) | — | 50 | — | $\text{k}\Omega$ |
| $I_{DD}(\text{awake})$ | Supply Current | During 'awake' period, $T_A = +25^\circ\text{C}$, $V_{DD} = 3\text{V}$ | — | 2.1 | — | mA |
| $I_{DD}(\text{sleep})$ | | During 'sleep' period, $T_A = +25^\circ\text{C}$, $V_{DD} = 3\text{V}$ | — | 2.5 | — | mA |
| $I_{DD}(\text{avg})$ | Average Supply Current | $T_A = +25^\circ\text{C}$, $V_{DD} = 1.85\text{V}$ | — | 4.3 | 8 | μA |
| | | $T_A = +25^\circ\text{C}$, $V_{DD} = 3.6\text{V}$ | — | 7.2 | 13 | μA |
| T_{awake} | Awake Time | (Note 9) | — | 50 | 100 | μs |
| T_{period} | Period | (Note 9) | — | 50 | 100 | ms |
| D.C. | Duty Cycle | (Note 10) | — | 0.1 | — | % |

- Notes:
- BSEL pin internal pull-down resistor is only active during AWAKE time
 - When power is initially on, the operating V_{DD} (1.6V to 3.6V) must be applied to guarantee the output sampling. The output state is valid after the second operating phase (typical 100ms).
 - Transition time varies dependant on the timing of BSEL activation during the sleep and awake phases.

Electrical Characteristics (cont.)

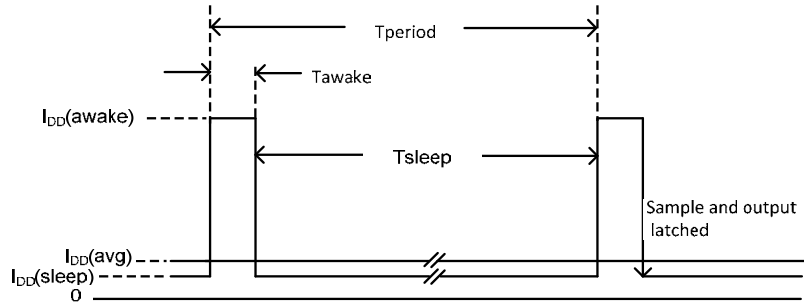


Magnetic Characteristics (Note 11 & 12) ($T_A = -40^{\circ}C$ to $+85^{\circ}C$, $V_{DD} = 1.85V$, unless otherwise specified)

(1mT=10 Gauss)

| BSEL | Symbol | Characteristics | Min | Typ | Max | Unit |
|------|--|-----------------------------|-----|-----|-----|-------|
| Low | Bops _{LB} (South pole to part marking side) | Low Band - Operation Point | 15 | 30 | 45 | Gauss |
| Low | Bopn _{LB} (North pole to part marking side) | | -45 | -30 | -15 | |
| Low | Brps _{LB} (South pole to part marking side) | Low Band - Release Point | 10 | 20 | 35 | |
| Low | Brpn _{LB} (North pole to part marking side) | | -35 | -20 | -10 | |
| High | Bops _{HB} (South pole to part marking side) | High Band - Operation Point | 25 | 40 | 55 | |
| High | Bopn _{HB} (North pole to part marking side) | | -55 | -40 | -25 | |
| High | Brps _{HB} (South pole to part marking side) | High Band - Release Point | 20 | 30 | 45 | |
| High | Brpn _{HB} (North pole to part marking side) | | -45 | -30 | -20 | |
| — | Bhy (Bopx - Brpx) | Hysteresis | — | 10 | — | |

Notes: 11. Typical data is at $T_A = +25^{\circ}C$, $V_{DD} = 1.85V$.
 12. Maximum and minimum parameters values over the operating temperature range are not tested in production, they are guaranteed by design, process control and characterization. The magnetic characteristics may vary with supply voltage, operating temperature and after soldering.


The AH1894 includes a band select pin (BSEL) so that the operate (Bops and Bopn) and release (Brps and Brpn) points can be adjusted between two pre-defined ranges. The BSEL can be hard wired within the application circuit or the band can be selected on the fly by using the BSEL pin as a logic input. This feature allows the AH1894 sensitivity to be changed by firmware within the application without the addition of any external components. If the BSEL pin is left open circuit the AH1894 defaults to low band.

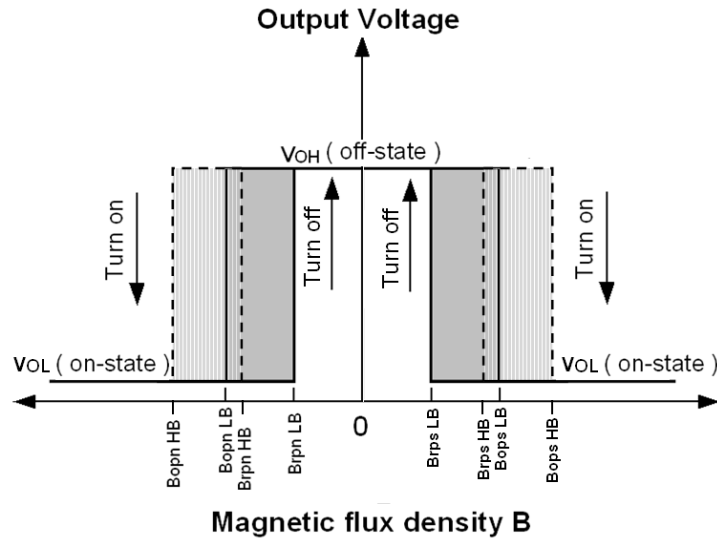

Application Notes


Applications Circuit 1 – Low Band

Leaving the BSEL pin unconnected or connecting the BSEL pin to ground permanently configures the AH1894 into its high sensitivity mode (lower switching thresholds), requiring a reduced magnetic flux density to activate its output (Low Band).

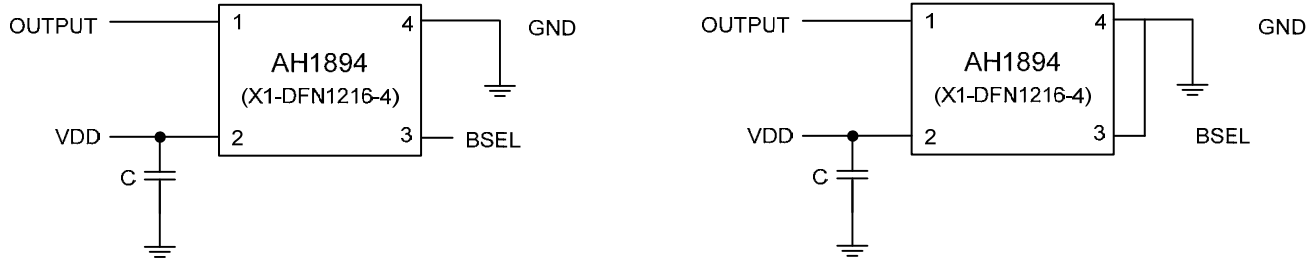


Applications Circuit 2 – High Band

Connecting the BSEL pin to V_{DD} or applying a voltage greater than 1.4V configures the AH1894 into its low sensitivity mode (higher switching threshold), requiring a higher magnetic flux density to activate its output (High Band).

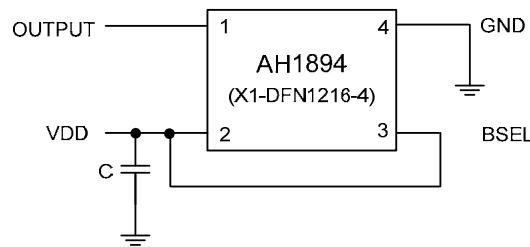

Applications Circuit 3 – Adjustable Sensitivity


To enhance the flexibility within the application the sensitivity can be adjusted with a standard logic signal allowing it to be controlled by a micro-controller or a logic source. This allows the sensitivity to be changed within the application without a hardware change. Whenever the sensitivity band selection is changed, allow for band selection changeover to complete and output to be valid.

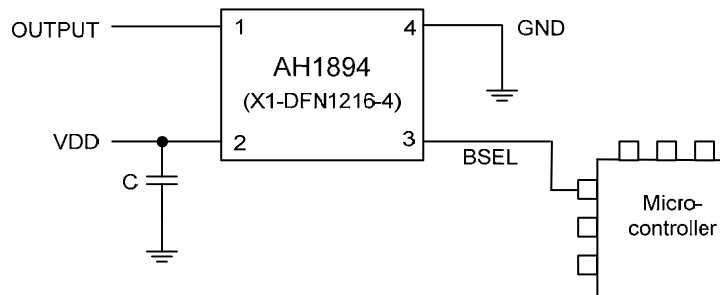

Application Notes (cont.)

Bands Select Change Timing and Valid Output







Whenever band selection BSEL pin input is changed, allow for band selection changeover to complete and stabilize. The output is valid only after the second complete operating 'awake' phase after the band selection change is complete. Time taken for the output to be valid, after the BSEL change, depends on timing of BSEL change during the sleep and awake phase; this time is up to 100ms typical and 200.1ms maximum (TBC).

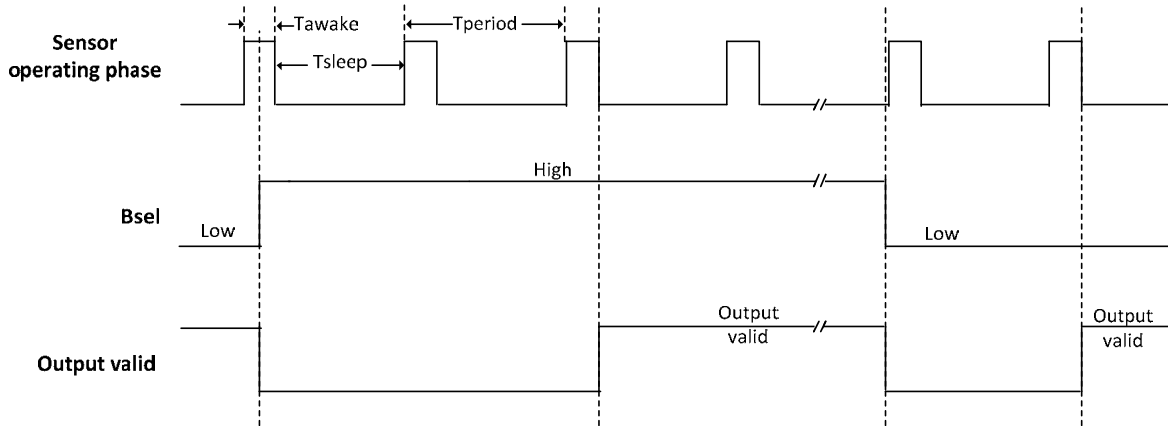

Typical Operating Characteristics



Typical Switch Points Characteristics in Low Band (BSEL = Low) and High Band (BSEL = High)

NEW PRODUCT

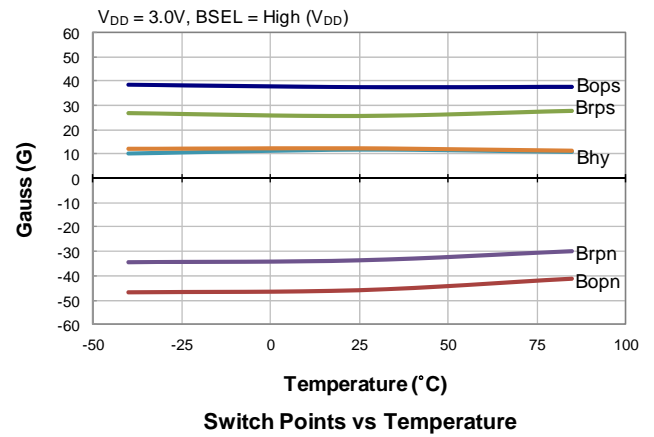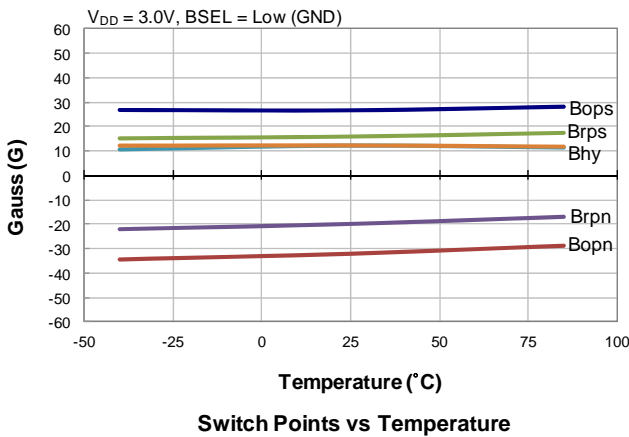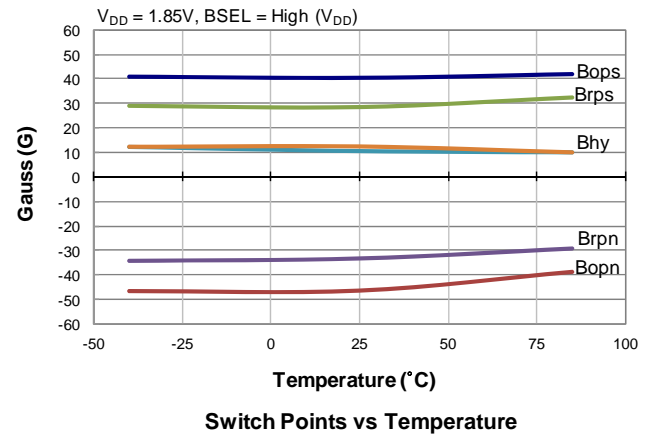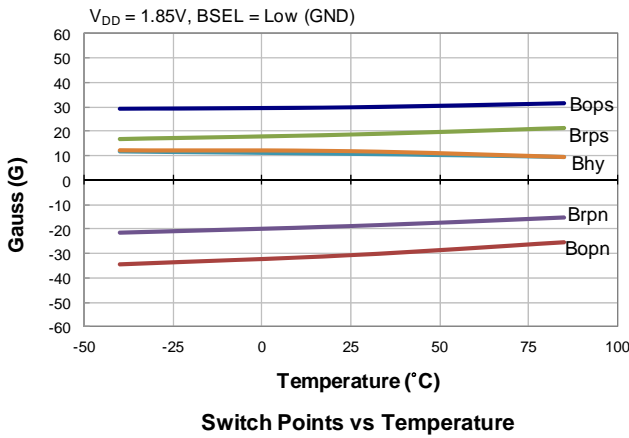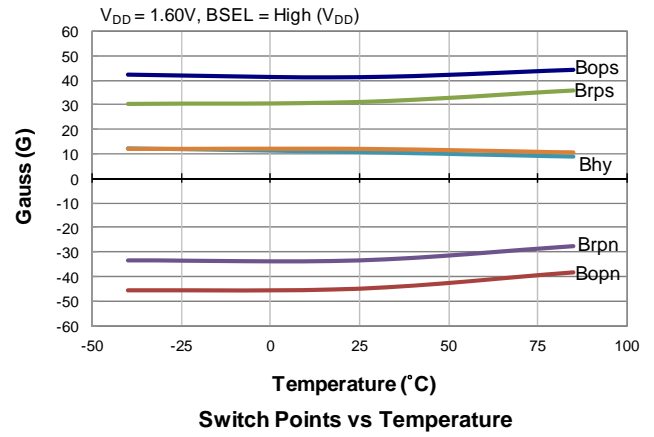
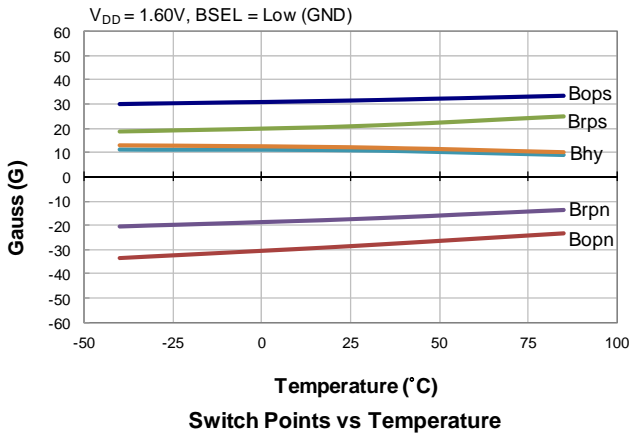


Typical Operating Characteristics (cont.)


Typical Switch Points Characteristics in Low Band (BSEL = Low) and High Band (BSEL = High)

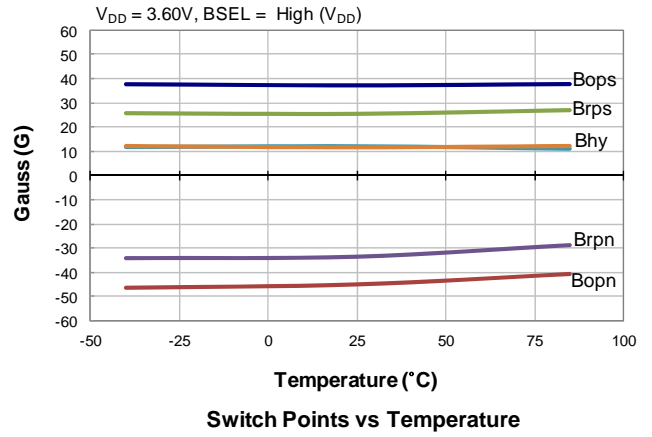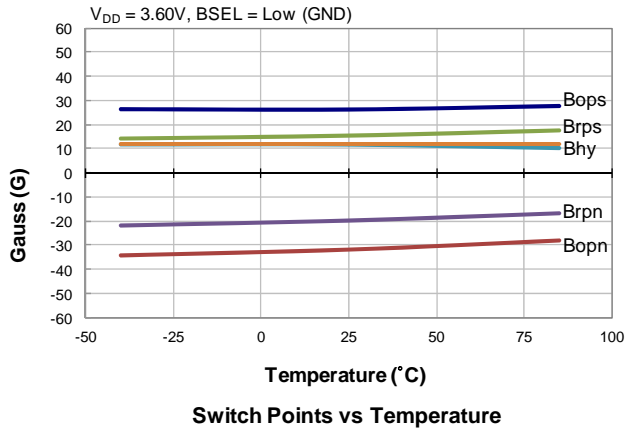

Average Supply Current $I_{DD} (avg)$

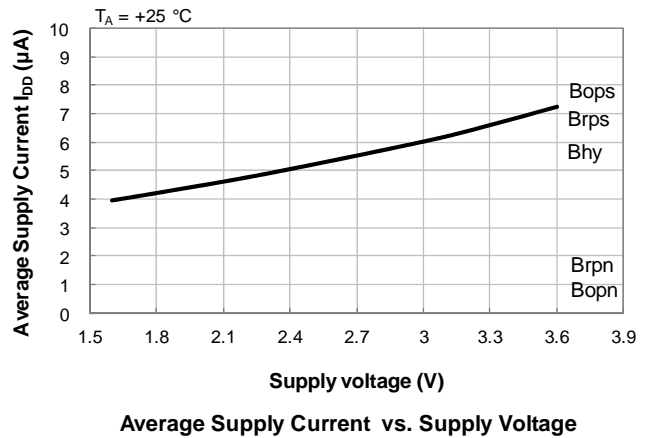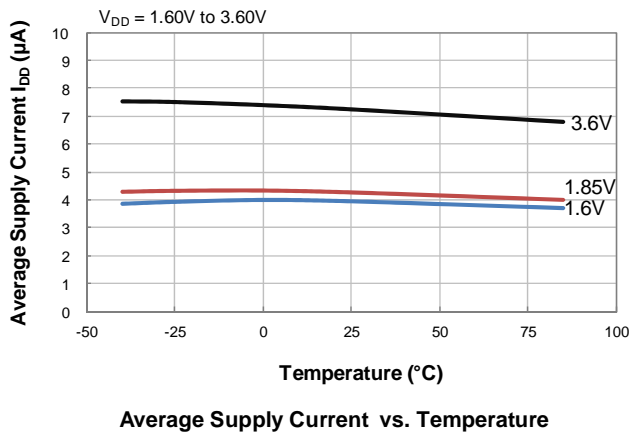

Ordering Information

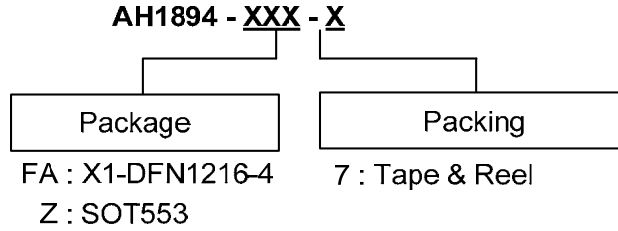


| Part Number | Package Code | Packaging | 7" Tape and Reel | |
|-------------|--------------|--------------|------------------|--------------------|
| | | | Quantity | Part Number Suffix |
| AH1894-FA-7 | FA | X1-DFN1216-4 | 3000/Tape & Reel | -7 |
| AH1894-Z-7 | Z | SOT553 | 3000/Tape & Reel | -7 |

Marking Information

(1) Package Type: X1-DFN1216-4

(Top View)




Pin 1 indicator
XX : Identification Code
Y : Year : 0~9
W : Week : A~Z : 1~26 week;
 a~z : 27~52 week; z represents
 52 and 53 week
X : A~Z : Green

| Part Number | Package | Identification Code |
|-------------|--------------|---------------------|
| AH1894-FA-7 | X1-DFN1216-4 | B4 |

(2) Package Type: SOT553

(Top View)





XX : Identification Code
Y : Year : 0 to 9
W : Week : A to Z : 1~26 week;
 a to z : 27~52 week; z represents
 52 and 53 week
X : Internal code

| Part Number | Package | Identification Code |
|-------------|---------|---------------------|
| AH1894-Z-7 | SOT553 | B4 |


Package Outline Dimensions (All dimensions in mm.)

Please see AP02002 at <http://www.diodes.com/datasheets/ap02002.pdf> for latest version.

(1) Package Type: X1-DFN1216-4

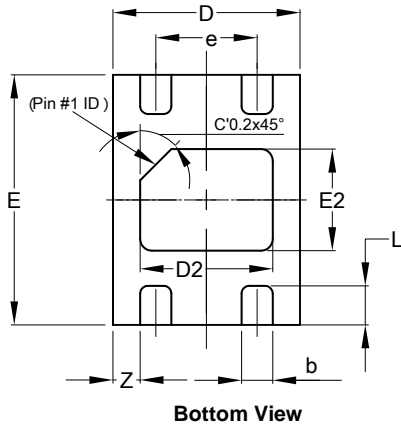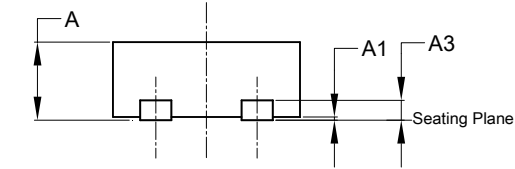


| X1-DFN1216-4 | | | |
|-----------------------------|------|------|-------|
| Dim | Min | Max | Typ |
| A | 0.47 | 0.53 | 0.50 |
| A1 | 0.00 | 0.05 | 0.02 |
| A3 | -- | -- | 0.13 |
| b | 0.15 | 0.25 | 0.20 |
| D | 1.15 | 1.25 | 1.20 |
| D2 | 0.75 | 0.95 | 0.85 |
| E | 1.55 | 1.65 | 1.60 |
| E2 | 0.55 | 0.75 | 0.65 |
| e | - | - | 0.65 |
| L | 0.20 | 0.30 | 0.25 |
| Z | - | - | 0.175 |
| All Dimensions in mm | | | |

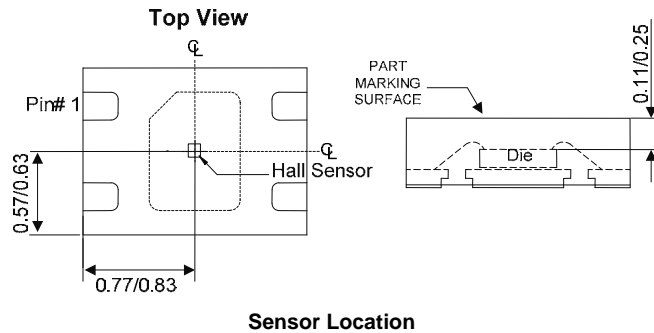


NEW PRODUCT

Package Outline Dimensions (cont.) (All dimensions in mm.)

(2) Package Type: SOT553

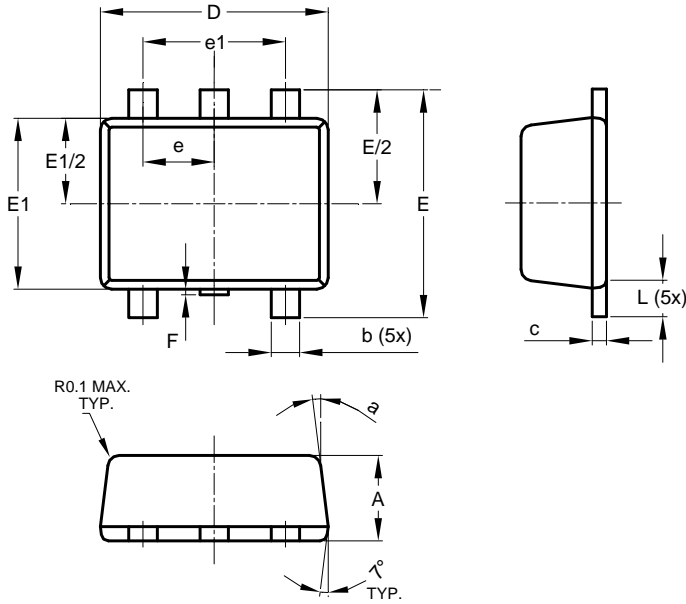

| SOT553 | | | |
|-----------------------------|----------|------|------|
| Dim | Min | Max | Typ |
| A | 0.55 | 0.62 | 0.60 |
| b | 0.15 | 0.30 | 0.20 |
| c | 0.10 | 0.18 | 0.15 |
| D | 1.50 | 1.70 | 1.60 |
| E | 1.55 | 1.70 | 1.60 |
| E1 | 1.10 | 1.25 | 1.20 |
| e | 0.50 BSC | | |
| e1 | 1.00 BSC | | |
| F | 0.00 | 0.10 | — |
| L | 0.10 | 0.30 | 0.20 |
| a | 6° | 8° | 7° |
| All Dimensions in mm | | | |

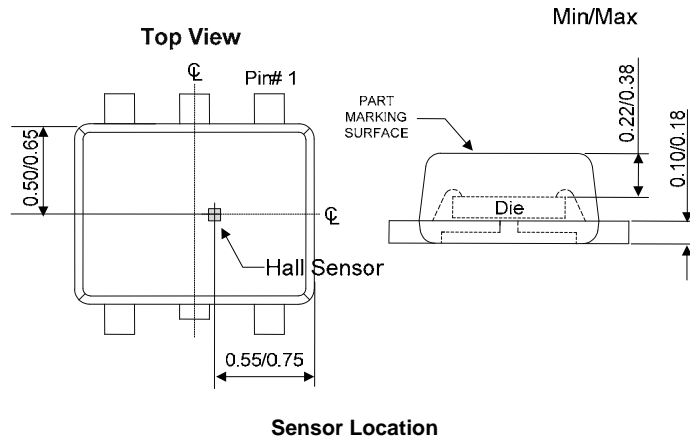


NEW PRODUCT

Suggested Pad Layout


Please see AP02001 at <http://www.diodes.com/datasheets/ap02001.pdf> for the latest version.

(1) Package Type: X1-DFN1216-4

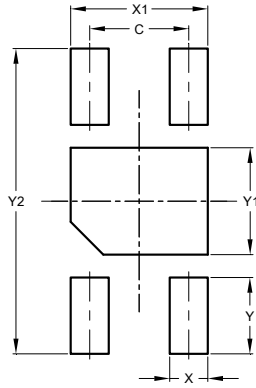

| X1-DFN1216-4 | |
|----------------------|-------|
| Dimensions | Value |
| C | 0.65 |
| X | 0.25 |
| X1 | 0.90 |
| Y | 0.50 |
| Y1 | 0.70 |
| Y2 | 2.00 |
| All Dimensions in mm | |

(2) Package Type: SOT553

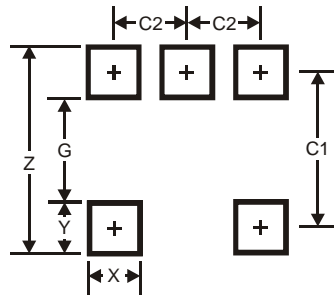

| SOT553 | |
|----------------------|-------|
| Dimensions | Value |
| Z | 2.2 |
| G | 1.2 |
| X | 0.375 |
| Y | 0.5 |
| C1 | 1.7 |
| C2 | 0.5 |
| All Dimensions in mm | |

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2013, Diodes Incorporated

www.diodes.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.