



## Single Output Industrial Power Supplies

### Features

- ◆ Limited Lifetime Warranty
- ◆ -10 to +71°C Operation (-40°C start up)
- ◆ Universal Input (85 - 265VAC)
- ◆ Conformally coated pcbs
- ◆ Class 1 Div 2 option (/RYHD suffix)
- ◆ Wide range AC Input

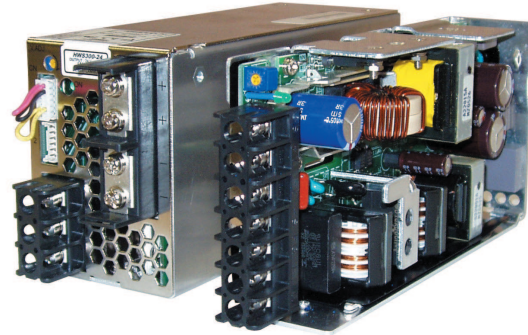

### Key Market Segments & Applications



Specifications			HWS50	HWS100	HWS150	HWS300	HWS600	HWS1000	HWS1500	
Model										
Input Voltage range (47-63Hz)	-		85-265VAC or 120-370VDC			85-265VAC or 120-330VDC (No DC input for HWS1500)				
Input Current (Typ) (1)	A		0.7 / 0.35	1.3 / 0.65	1.9 / 0.95	4.1 / 2.1	8.1 / 3.9	13.5 / 7	19 / 10	
Inrush Current (1)	A		14 / 2			20 / 4				
Power Factor	-		Meets EN61000-3-2							
Temperature Coefficient	-		<0.02%/°C							
Overcurrent Protection	-		>104%							
Overvoltage Protection	V		Yes (See table on page 2)							
Hold Up Time (Typ)	ms		20							
Leakage Current (60Hz)	mA		<0.5mA			<0.75mA		<1.2mA	≤1.5mA	
Remote Sense	-		No	Yes						
Indicator	-		Green LED = ON							
Remote On/Off	-		No			Yes (Isolated from output)				
Parallel operation	-		No			Single wire connection (5 units max)				
DC Good	-		No			Yes				
Remote Adjust (PV)	-		No					Yes (3)		
Operating Temperature and Derating (operation to +74°C - contact factory)	°C		HWS50-150: -10°C to +71°C, (-10 ~+50°C: 100%, +60°C: 60%, +71°C: 20%) HWS300-1500: -10°C to +71°C, (-10 ~+50°C: 100%, derate linearly to 50% load from +50 to +71°C) Guaranteed start up at -40°C (see specification sheets on website for details and derating)							
Storage Temperature	°C		-40 to +85°C							
Humidity (non condensing)	-		Operating: 30 - 90%RH (10 -90% on HWS300-1500), Non operating 10 - 95%RH							
Cooling	-		Convection			Internal fan				
Withstand Voltage (2)	-		Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.							
Isolation Resistance	-		>100MΩ at 25°C & 70%RH, Output to Ground 500VDC, >10M Output to remote on/off 100VDC							
Vibration (non operating)	-		MIL-STD-810F 514.5 Category 4, 10 (HWS1500 Cat 4, figure 514.5C-1)							
Shock (in packaging)	-		MIL-STD-810F 516.5 Category I, VI (HWS1500 <196.1m/s <sup>2</sup> )							
Safety Agency Approvals	-		UL60950-1, CSA60950-1, EN60950-1, EN50178, CE Mark							
Line Dip	-		Complies with SEMI F47 (200VAC line only)							
Conducted & Radiated EMI	-		EN55011 / EN55022-B, FCC-B, VCCI-B (HWS1500 Class A)							
Immunity	-		IEC61000-4-2 (Level 2,3), -3, -4, -6, (Level 3), -5, -8 (Level 4), -11							
Weight (Typ)	g		280	450	500	1000	1600	3200	3800	
Size (WxHxD)	in		1.04x3.23x4.72	1.1x3.23x6.3	1.46x3.23x6.3	2.4x3.23x6.5	3.94x3.23x6.5	5x3.2x9.5	5x3.25x11	
Warranty	yrs		Limited lifetime warranty (See TDK-Lambda's terms & conditions)							

(1) 100/200VAC input

(2) HWS300-600 2.5kVAC Input to ground

(3) 1-6V program voltage input to adjust output 20-120% (typical) of nominal. See instruction manual for details & models with this feature.

(\*) Class 1 Div 2 option (/RYHD suffix)

Output Ratings										
Model	Voltage	Adjust Range	Max Curr(A)	Peak Curr(A) <sup>4</sup>	Max Power(W)	Load Reg(mV)	Line Reg(mV)	Ripple Noise(mV)	Overshoot (V)	Efficiency (typ)% <sup>1</sup>
HWS50-3/HD	3.3V	2.97 - 3.96	10	-	33	40	20	120	4.13-4.95	76/78
HWS100-3/HD	3.3V	2.97 - 3.96	20	-	66	40	20	120	4.13-4.95	78/81
HWS150-3/HD	3.3V	2.97 - 3.96	30	-	99	40	20	120	4.13-4.95	78/81
HWS300-3/HD	3.3V	2.64 - 3.96	60	-	198	30	20	120	4.13-4.95	74/77
HWS600-3/HD	3.3V	2.64 - 3.96	120	-	396	30	20	120	4.13-4.95	75/78
HWS1000-3/HD	3.3V	2.64 - 3.96	200	-	660	40	20	120	4.12-4.62	71/73
HWS1500-3/HD	3.3V	2.64 - 3.96	300	-	990	60	36	150	4.12-4.62	72/75
HWS50-5/HD	5V	4.0 - 6.0	10	-	50	40	20	120	6.25-7.25	82/84
HWS100-5/HD	5V	4.0 - 6.0	20	-	100	40	20	120	6.25-7.25	83/86
HWS150-5/HD	5V	4.0 - 6.0	30	-	150	40	20	120	6.25-7.25	83/86
HWS300-5/HD	5V	4.0 - 6.0	60	-	300	30	20	120	6.25-7.25	79/82
HWS600-5/HD	5V	4.0 - 6.0	120	-	600	30	20	120	6.25-7.25	80/83
HWS1000-5/HD	5V	4.0 - 6.0	200	-	1000	40	20	120	6.25-7	76/78
HWS1500-5/HD	5V	4.0 - 6.0	300	-	1500	60	36	150	6.25-7	77/81
HWS1000-6/HD	6V	4.8 - 7.2	167	-	1002	60	36	150	7.5-8.4	79/81
HWS1000-7/HD	7.5V	6.0 - 9.0	134	160	1005	60	36	150	9.37-10.5	80/82
HWS50-12/HD	12V	9.6 - 14.4	4.3	-	51.6	96	48	150	15-17.4	81/83
HWS100-12/HD	12V	9.6 - 14.4	8.5	-	102	96	48	150	15-17.4	83/86
HWS150-12/HD	12V	9.6 - 14.4	13	-	156	96	48	150	15-17.4	83/86
HWS300-12/HD	12V	9.6 - 14.4	27	-	324	72	48	150	15-17.4	80/83
HWS600-12/HD	12V	9.6 - 14.4	53	-	636	72	48	150	15-17.4	80/83
HWS1000-12/HD	12V	9.6 - 14.4	88	100	1056	100	48	150	15-17.4	82/85
HWS1500-12/HD	12V	9.6 - 14.4	125	-	1500	72	48	150	15-17.4	82/85
HWS50-15/HD	15V	12.0 - 18.0	3.5	-	52.5	120	60	150	18.8-21.8	81/83
HWS100-15/HD	15V	12.0 - 18.0	7	-	105	120	60	150	18.8-21.8	83/86
HWS150-15/HD	15V	12.0 - 18.0	10	-	150	120	60	150	18.8-21.8	83/86
HWS300-15/HD	15V	12.0 - 18.0	22	-	330	90	60	150	18.8-21.8	80/83
HWS600-15/HD	15V	12.0 - 18.0	43	-	645	90	60	150	18.8-21.8	81/84
HWS1000-15/HD	15V	12.0 - 18.0	70	80	1500	120	60	150	18.7-21.8	83/85
HWS1500-15/HD	15V	12.0 - 18.0	100	-	1500	90	60	150	18.7-21.8	83/87
HWS50-24/HD	24V	19.2 - 28.8	2.2	-	52.8	192	96	150	30-34.8	82/84
HWS100-24/HD	24V	19.2 - 28.8	4.5	-	108	192	96	150	30-34.8	84/87
HWS150-24/HD	24V	19.2 - 28.8	6.5	-	156	192	96	150	30-34.8	85/88
HWS300-24/HD	24V	19.2 - 28.8	14	16.5	336	144	96	150	30-34.8	82/85
HWS600-24/HD	24V	19.2 - 28.8	27	31	648	144	96	150	30-34.8	82/85
HWS1000-24/HD	24V	19.2 - 28.8	46	58.5	1104	150	96	150	30-34.8	85/87
HWS1500-24/HD	24V	19.2 - 28.8	65/70 (1)	105	1560	144	96	200	30-34.8	84/88
HWS1000-36/HD	36V	28.8 - 43.2	30.7	39	1104	150	144	200	45-49.7	85/88
HWS1500-36/HD	36V	28.8 - 43.2	42/46.5(2)	70	1512	150	144	200	45-49.7	84/88
HWS50-48/HD	48V	38.4 - 52.8	1.1	-	52.8	384	192	200	55.2-64.8	83/85
HWS100-48/HD	48V	38.4 - 52.8	2.1	-	100.8	384	192	200	55.2-64.8	84/87
HWS150-48/HD	48V	38.4 - 52.8	3.3	-	158.4	384	192	200	55.2-64.8	85/88
HWS300-48/HD	48V	38.4 - 52.8	7	-	336	288	192	350	55.2-64.8	82/85
HWS600-48/HD	48V	38.4 - 52.8	13	-	624	288	192	350	55.2-64.8	83/86
HWS1000-48/HD	48V	38.4 - 52.8	28	29.2	1104	300	192	200	55.2-60	86/88
HWS1500-48/HD	48V	38.4 - 52.8	32	-	1536	288	192	200	55.2-64.8	86/90
HWS1000-60/HD	60V	48.0 - 66.0	18.4	23.4	1104	360	240	400	69-75	85/88

(4) 200-265VAC Input, 10s maximum on time, 35% duty cycle

Options	
Suffix	Description
Blank	No Cover (HWS50-150 Only) HWS300-1500 the cover is fitted as standard
/HDA	The cover option for HWS50-150 is special order only HWS300-1500 the cover is fitted as standard
/RYHD	ISA 12.12.01 (UL1604) - Class 1 Div 2 with dry contact relay DC Good signal (300W, 600W and 1500W 24V output models only, no remote on/off function.)

Other Industrial Products	
LZSA	500W to 1500W Single output
DPP, DLP, DSP	10W to 960W DIN Rail Mount
PFE	300 to 1000W AC-DC Power Models

For Additional Information, please visit  
[us.tdk-lambda.com/lp/products/hws-series.htm](http://us.tdk-lambda.com/lp/products/hws-series.htm)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.