

DC/DC Converter

THN 15N Series, 15 Watt

- 15 Watt converter in a compact 1" x 1" metal package
- Wide 2:1 input voltage 9-18, 18-36, 36-75 VDC
- Internal EN 55032 class A filter
- Operating temperature range -40 to +70 °C without derating
- Low no-load power consumption 96 – 336 mW
- High efficiency up to 91%
- I/O-isolation voltage 1600 VDC
- Protection against overload, overvoltage and short circuit
- Remote On/Off and Trim function
- 3-year product warranty



The THN 15N series is the latest generation of high performance 15 Watt DC/DC converters and comes in an encapsulated, shielded 1" x 1" x 0.4" metal package. The new and improved design allows to fully integrate an EN 55032 class A filter and greatly reduces the no-load power consumption (96-336 mW).

Advanced circuit design and a high efficiency of up to 91% enable the THN 15N to operate in a temperature range of -40°C to +70°C without derating. All models have a wide 2:1 input voltage range and precisely regulated, isolated output voltages. Further features include remote On/Off and trim able outputs.

Together with the latest IT safety certifications (UL 62368-1) typical applications for these converters are mobile equipment, instrumentation, distributed power architectures in communication and industrial electronics and everywhere where space on PCB is critical.

Models

Order code	Input voltage	Output voltage (single outputs: adjustable)	Output current max.	Efficiency typ.
THN 15-1210N	9 - 18 VDC (nominal 12 VDC)	3.3 VDC	4500 mA	88 %
THN 15-1211N		5 VDC	3000 mA	90 %
THN 15-1212N		12 VDC	1300 mA	89 %
THN 15-1213N		15 VDC	1000 mA	90 %
THN 15-1215N		24 VDC	625 mA	91 %
THN 15-1221N		±5 VDC	±1500 mA	86 %
THN 15-1222N		±12 VDC	±625 mA	89 %
THN 15-1223N		±15 VDC	±500 mA	90 %
THN 15-1225N		±24 VDC	±315 mA	90 %
THN 15-2410N	18 - 36 VDC (nominal 24 VDC)	3.3 VDC	4500 mA	88 %
THN 15-2411N		5 VDC	3000 mA	90 %
THN 15-2412N		12 VDC	1300 mA	89 %
THN 15-2413N		15 VDC	1000 mA	90 %
THN 15-2415N		24 VDC	625 mA	91 %
THN 15-2421N		±5 VDC	±1500 mA	86 %
THN 15-2422N		±12 VDC	±625 mA	90 %
THN 15-2423N		±15 VDC	±500 mA	90 %
THN 15-2425N		±24 VDC	±315 mA	90 %
THN 15-4810N	36 - 75 VDC (nominal 48 VDC)	3.3 VDC	4500 mA	87 %
THN 15-4811N		5 VDC	3000 mA	89 %
THN 15-4812N		12 VDC	1300 mA	89 %
THN 15-4813N		15 VDC	1000 mA	89 %
THN 15-4815N		24 VDC	625 mA	90 %
THN 15-4821N		±5 VDC	±1500 mA	85 %
THN 15-4822N		±12 VDC	±625 mA	89 %
THN 15-4823N		±15 VDC	±500 mA	89 %
THN 15-4825N		±24 VDC	±315 mA	89 %

Input current at no load	12 Vin models: 10 mA typ. 24 Vin models: 8 mA typ. 48 Vin models: 7 mA typ.
Surge voltage (1 s max.)	12 Vin models: 25 VDC max. 24 Vin models: 50 VDC max. 48 Vin models: 100 VDC max.
Start up voltage	12 Vin models: 9 VDC (or lower) 24 Vin models: 18 VDC (or lower) 48 Vin models: 36 VDC (or lower)
Under voltage shut down	12 Vin models: 7.5 VDC min. 24 Vin models: 15.5 VDC min. 48 Vin models: 32.5 VDC min.
Input filter	internal Pi type
Recommended input fuse	12 Vin models: 3.15 A (slow blow type) 24 Vin models: 1.6 A (slow blow type) 48 Vin models: 0.8 A (slow blow type)
Remote On/Off	Open or 3 – 15 VDC Short or 0 – 1.2 VDC –0.5 to +1.0 mA 1.5 mA typ.

Voltage adjustability	– Single output	15 & 24 Vout models: other single output models:	–10 to +20 % –10 to +10 %
Voltage set accuracy			±1 % max.
Regulation	– Input variation (Vin min. to Vin max.)	single output: dual output:	0.2 % max. 0.5 % max.
	– Load variation (0 – 100 %)	single output: dual output:	0.2 % max. 1 % max. (balanced load)
	– Cross regulation	dual output:	5 % max. (asymmetrical load 25 % / 100 %)
Temperature coefficient			±0.02 %/K max.
Ripple and noise (20 MHz Bandwidth)		3.3 & 5 Vout models: 12 & 15 Vout models: 24 Vout models:	75 mVp-p typ. (10uF/6.3V X7R MLCC, each output) 100 mVp-p typ. (1uF/25V X7R MLCC, each output) 125 mVp-p typ. (2.2uF/50V X7R MLCC, each output)
Start up time (constant resistive load)			40 ms max.
Transient response time (25% load step change)			250 µs typ.
Over voltage protection		3.3 Vout models: 5 Vout models: 12 Vout models: 15 Vout models: 24 Vout models:	3.7 – 5.4 VDC 5.6 – 7.0 VDC 13.5 – 19.6 VDC 18.3 – 22.0 VDC 29.1 – 32.5 VDC
Current limitation			150 % typ. of Iout max.
Short circuit protection			Continuous, automatic recovery
Capacitive load	– Single output	3.3 Vout models: 5 Vout models: 12 Vout models: 15 Vout models: 24 Vout models:	5200 µF max. 3600 µF max. 600 µF max. 500 µF max. 200 µF max.
	– Dual output	±5 Vout models: ±12 Vout models: ±15 Vout models: ±24 Vout models:	1500 µF max. (each output) 360 µF max. (each output) 250 µF max. (each output) 100 µF max. (each output)

Page 2 of 4

General Specifications


Temperature ranges	– Operating (natural convection: 20 LFM, 0.1 m/s) – Case temperature – Storage temperature	–40°C to +105°C +105°C max. –55°C to +125°C
Derating	Please refer to Application note:	Depending on model www.tracopower.com/overview/thn15n
Thermal Impedance		17 K/W
Humidity (non condensing)		5 – 95 % rel H
Isolation voltage	– Input to output (60 s) – Input/output to case	1'600 VDC 1'000 VDC
Isolation resistance		1 GOhm min.
Isolation capacitance		2000 pF max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		1'670'000 h
Switching frequency	3.3 & 5 Vout models: other output models:	220 – 270 kHz (pulse width modulation) 270 – 330 kHz (pulse width modulation)
Safety standards /approvals	– Certification documents	IEC/EN/UL 62368-1 www.tracopower.com/overview/thn15n
EMC emissions	– Application note for filter class B proposal	EN 55032, EN 55011 class A without external components class B with external components www.tracopower.com/overview/thn15n
EMC immunity	– ESD (electrostatic discharge) – Radiated immunity – Fast transient (with external components) – Surge (with external components) – Application note for Fast transient / surge filter – Conducted immunity – Magnetic field immunity	EN 55024 EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV perf. criteria A www.tracopower.com/overview/thn15n EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8, 100 A/m continuous, 1000 A/m 1 s, perf. criteria A
Shock, vibration and thermal shock		acc. MIL-STD-810F
Environmental compliance	– Reach – RoHS	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU

Physical Specifications

Casing material	Copper
Base material	FR4 PCB
Potting material	Silicone (UL 94V-0 rated)
Package weight	16.5 g (0.58 oz)

Supporting Documents: www.tracopower.com/overview/thn15n

Outline Dimensions

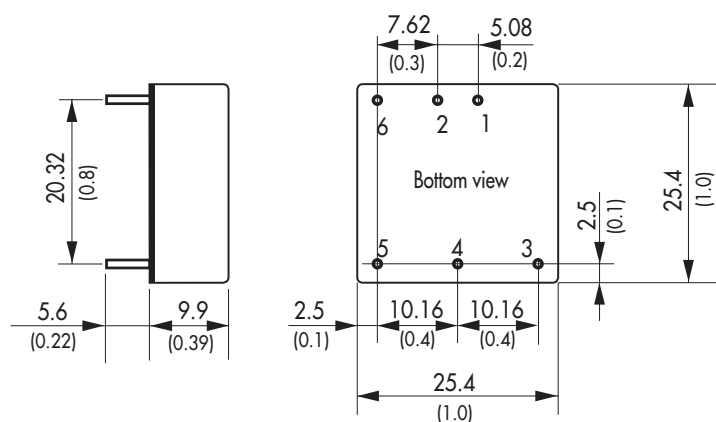

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off

Dimensions in mm, () = Inch

Pin diameter $\varnothing$ 1.0 (0.04)

Tolerances: x.x ± 0.5 (± 0.02)

x.xx ± 0.25 (± 0.01)

Pin pitch tolerance ± 0.25 (± 0.01)

Pin dimension tolerance ± 0.1 (± 0.004)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.