


Features

- Epitaxial Planar Die Construction
- Complementary PNP Types Available (DDTA)
- Built-In Biasing Resistors, R1 = R2
- **Lead Free/RoHS Compliant (Note 1)**
- **"Green" Device (Note 3 and 4)**



Mechanical Data

- Case: SOT-523
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See Diagram
- Terminals: Finish - Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Marking Information: See Table Below and Page 7
- Ordering Information: See Page 7
- Weight: 0.002 grams (approximate)

| P/N | R1, RN (NOM) | Marking |
|-----------|---------------|---------|
| DDTC123EE | 2.2K Ω | N04 |
| DDTC143EE | 4.7K Ω | N08 |
| DDTC114EE | 10K Ω | N13 |
| DDTC124EE | 22K Ω | N17 |
| DDTC144EE | 47K Ω | N20 |
| DDTC115EE | 100K Ω | N24 |

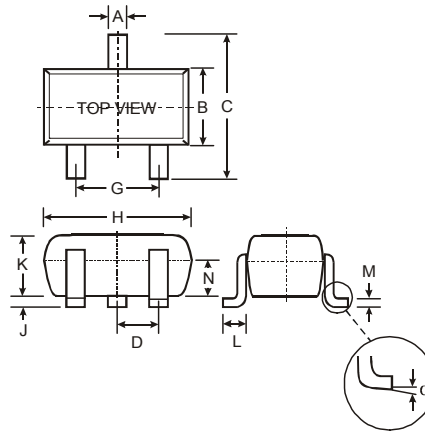

| SOT-523 | | | |
|----------------------|------|------|------|
| Dim | Min | Max | Typ |
| A | 0.15 | 0.30 | 0.22 |
| B | 0.75 | 0.85 | 0.80 |
| C | 1.45 | 1.75 | 1.60 |
| D | — | — | 0.50 |
| G | 0.90 | 1.10 | 1.00 |
| H | 1.50 | 1.70 | 1.60 |
| J | 0.00 | 0.10 | 0.05 |
| K | 0.60 | 0.80 | 0.75 |
| L | 0.10 | 0.30 | 0.22 |
| M | 0.10 | 0.20 | 0.12 |
| N | 0.45 | 0.65 | 0.50 |
| α | 0° | 8° | — |
| All Dimensions in mm | | | |

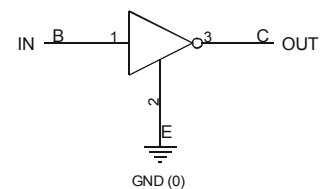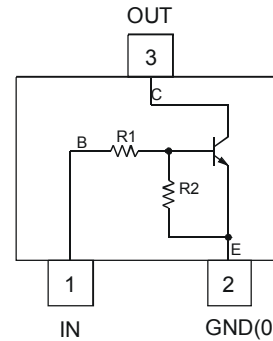

Schematic and Pin Configuration

Equivalent Inverter Circuit

Maximum Ratings @_{T_A} = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|--|------|
| Supply Voltage (3) to (2) | V _{CC} | 50 | V |
| Input Voltage (1) to (2) | V _{IN} | -10 to +12 -10 to +30 -10 to +40 -10 to +40 -10 to +40 -10 to +40 | V |
| Output Current | I _O | 100 100 50 30 100 20 | mA |
| Power Dissipation | P _d | 150 | mW |
| Thermal Resistance, Junction to Ambient Air (Note 2) | R _{θJA} | 833 | °C/W |
| Operating and Storage Temperature Range | T _i , T _{STG} | -55 to +150 | °C |



- Notes:
1. No purposefully added lead.
 2. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 3. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 4. Product manufactured with Date Code UO (week 40, 2007) and newer are built with Green Molding Compound. Product manufactured prior to Date Code UO are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

Electrical Characteristics @T_A = 25°C unless otherwise specified

| Characteristic | | Symbol | Min | Typ | Max | Unit | Test Condition |
|--|--|--------------------------------|----------------------------------|-----|--|------|---|
| Input Voltage | | V _{I(off)} | 0.5 | 1.1 | — | V | V _{CC} = 5V, I _O = 100mA |
| | | V _{I(on)} | — | 1.9 | 3 | | V _O = 0.3V, I _O = 20mA, DDTC123EE V _O = 0.3V, I _O = 20mA, DDTC143EE V _O = 0.3V, I _O = 10mA, DDTC114EE V _O = 0.3V, I _O = 5mA, DDTC124EE V _O = 0.3V, I _O = 2mA, DDTC144EE V _O = 0.3V, I _O = 1mA, DDTC115EE |
| Output Voltage | | V _{O(on)} | — | 0.1 | 0.3 | V | I _O /I _I = 10mA/0.5mA, DDTC123EE I _O /I _I = 10mA/0.5mA, DDTC143EE I _O /I _I = 10mA/0.5mA, DDTC114EE I _O /I _I = 10mA/0.5mA, DDTC124EE I _O /I _I = 10mA/0.5mA, DDTC144EE I _O /I _I = 5mA/0.25mA, DDTC115EE |
| Input Current | DDTC123EE DDTC143EE DDTC114EE DDTC124EE DDTC144EE DDTC115EE | I _I | — | — | 3.8 □ 1.8 □ 0.88 □ 0.36 0.18 □ 0.15 | mA | V _I = 5V |
| Output Current | | I _{O(off)} | — | — | 0.5 | μA | V _{CC} = 50V, V _I = 0V |
| DC Current Gain | DDTC123EE DDTC143EE DDTC114EE DDTC124EE DDTC144EE DDTC115EE | G _I | 20 20 30 56 68 82 | — | — | — | V _O = 5V, I _O = 20mA V _O = 5V, I _O = 10mA V _O = 5V, I _O = 5mA V _O = 5V, I _O = 5mA V _O = 5V, I _O = 5mA V _O = 5V, I _O = 5mA |
| Input Resistor (R ₁) Tolerance | | ΔR ₁ | -30 | — | +30 | % | — |
| Resistance Ratio | | R ₂ /R ₁ | 0.8 | 1 | 1.2 | — | — |
| Gain-Bandwidth Product* | | f _T | — | 250 | — | MHz | V _{CE} = 10V, I _E = 5mA, f = 100MHz |

* Transistor – For Reference Only

Electrical Characteristics @T_A = 25°C unless otherwise specified

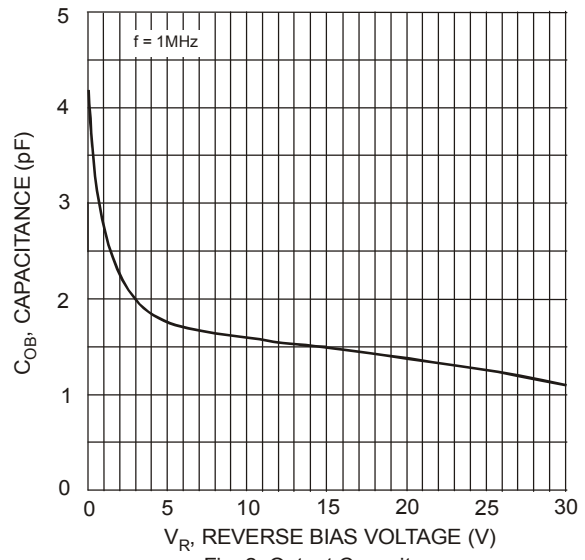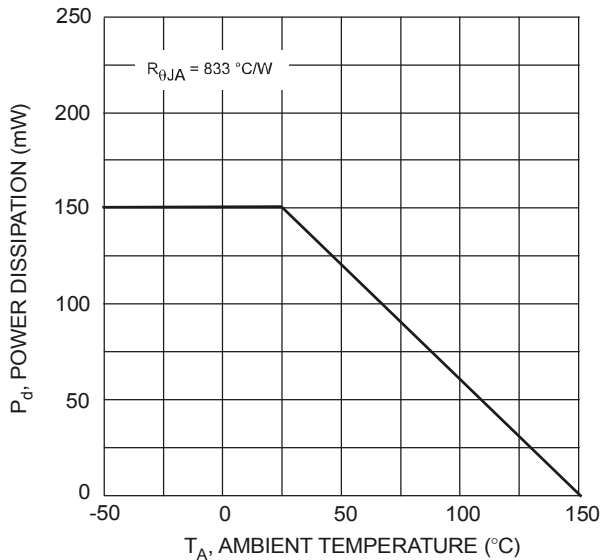

Typical Curves – DDTC123EE

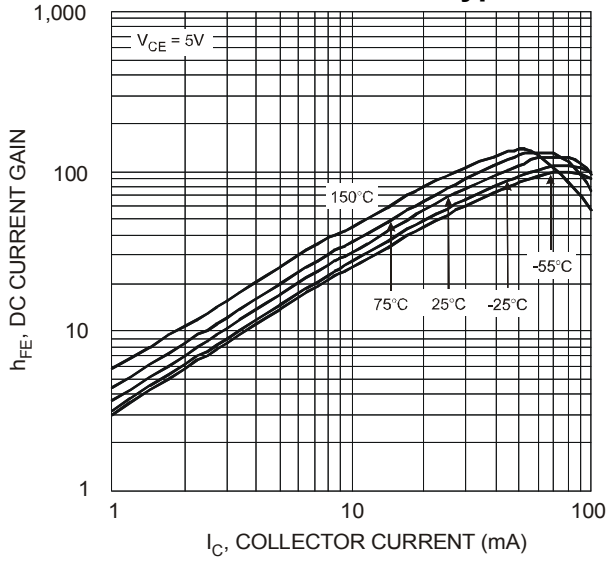


Fig. 3 Typical DC Current Gain vs. Collector Current

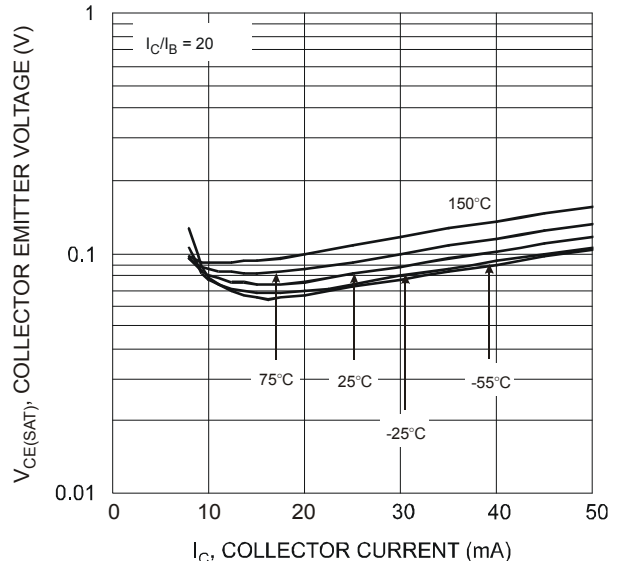


Fig. 4 $V_{CE(SAT)}$ vs. I_C

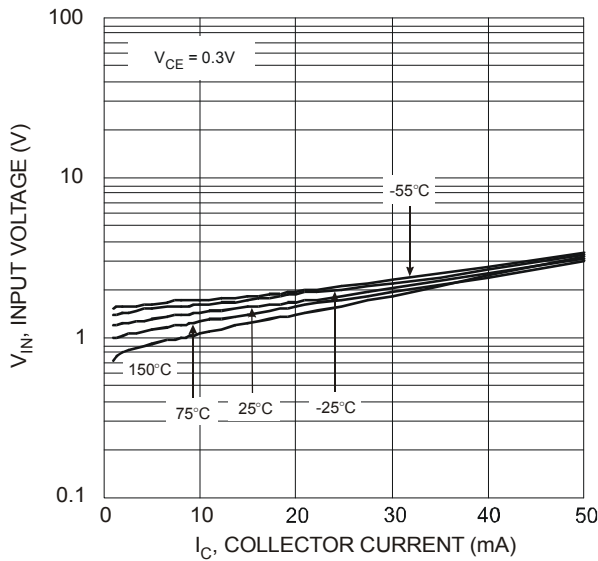


Fig. 5 Input Voltage vs. Collector Current

Typical Curves – DDTC143EE

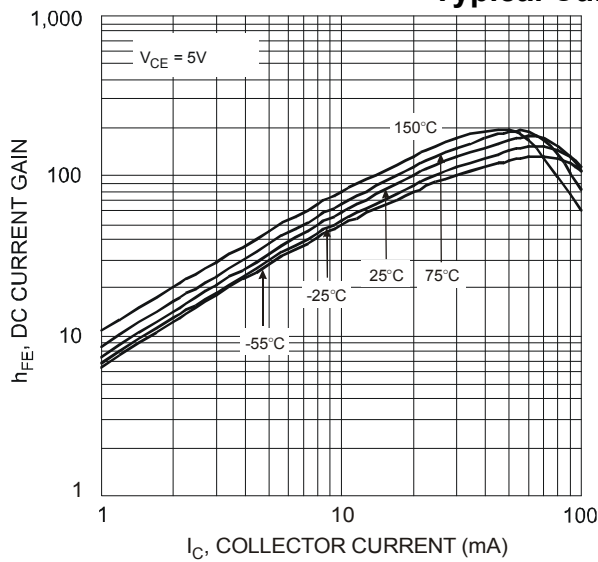


Fig. 6 Typical DC Current Gain vs. Collector Current

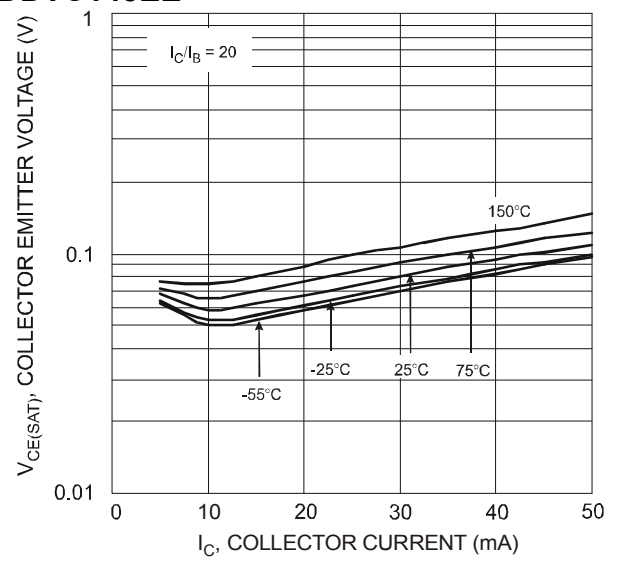


Fig. 7 $V_{CE(SAT)}$ vs. I_C

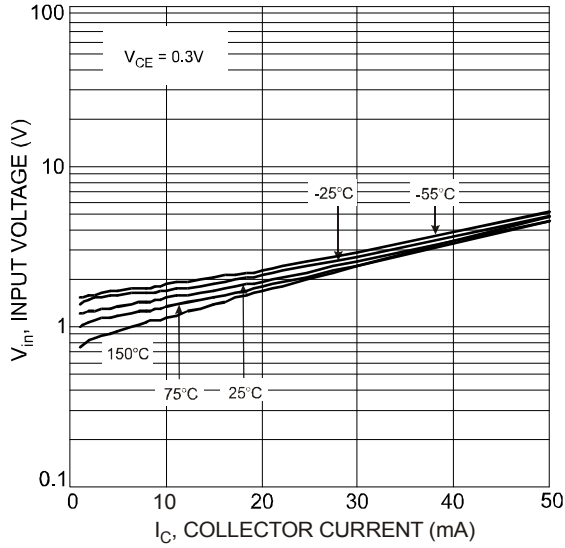


Fig. 8 Input Voltage vs. Collector Current

Typical Curves – DDTC114EE

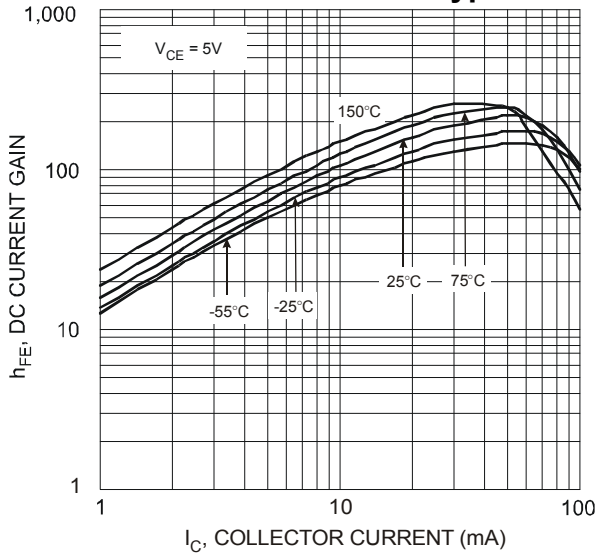


Fig. 9 Typical DC Current Gain vs. Collector Current

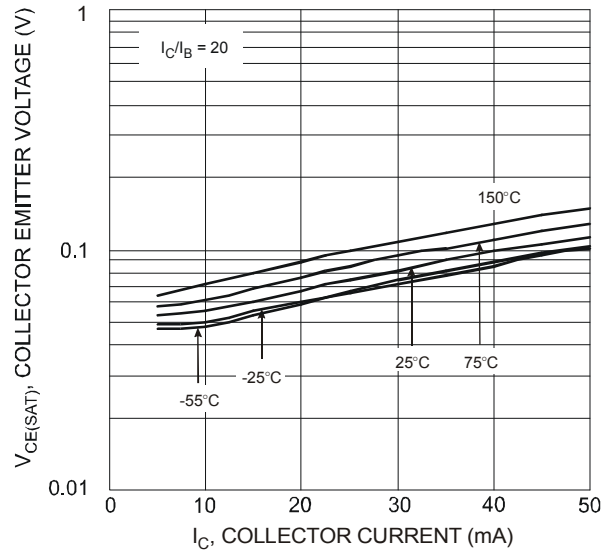


Fig. 10 $V_{CE(SAT)}$ vs. I_C

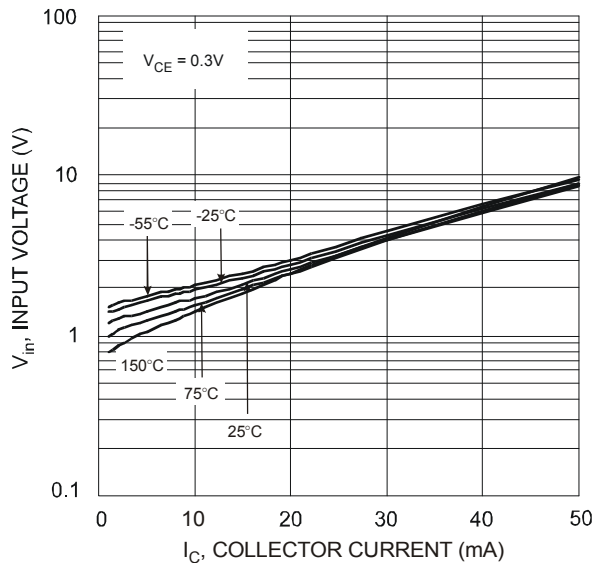


Fig. 11 Input Voltage vs. Collector Current

Typical Curves – DDTC124EE

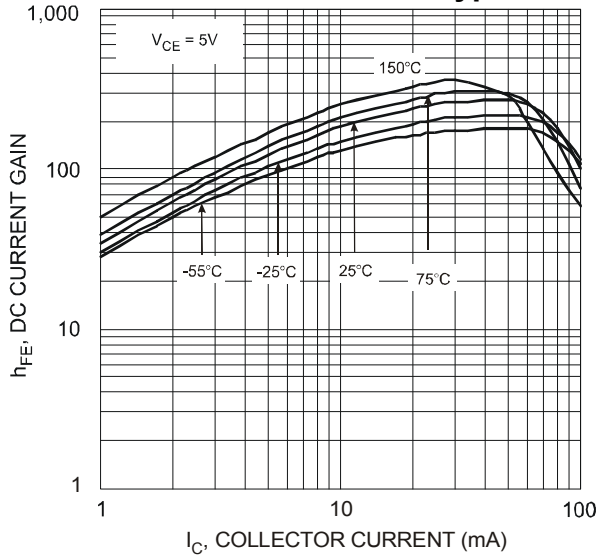


Fig. 12 Typical DC Current Gain vs. Collector Current

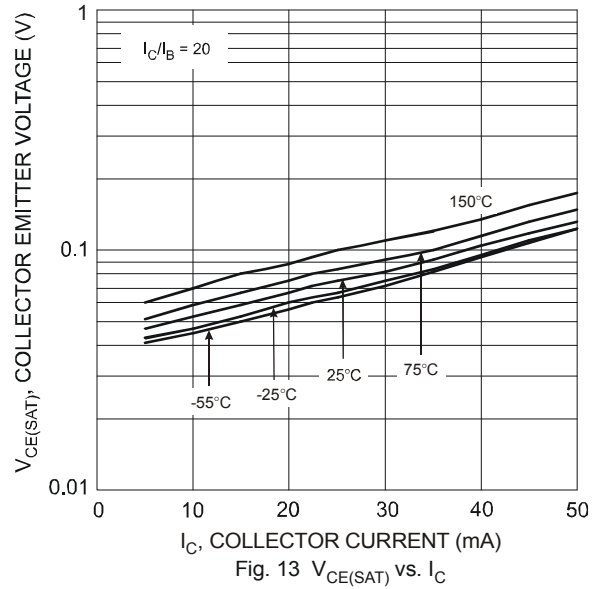


Fig. 13 $V_{CE(SAT)}$ vs. I_C

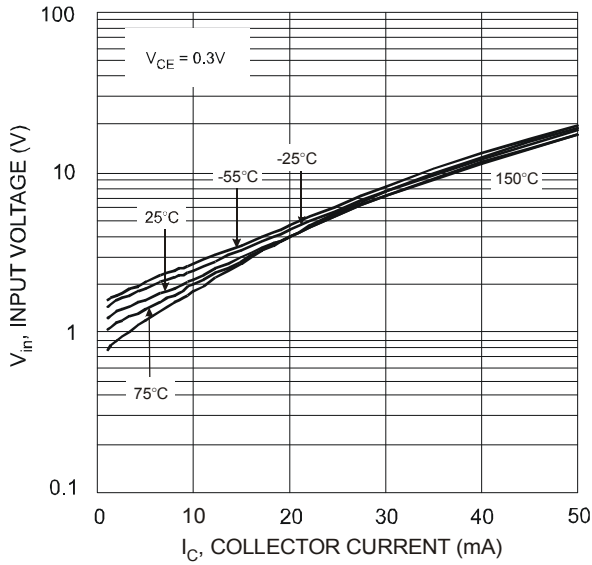


Fig. 14 Input Voltage vs. Collector Current

Typical Curves – DDTC144EE

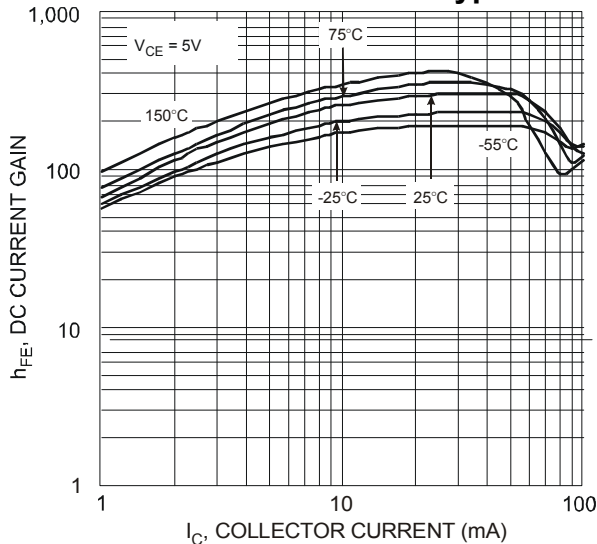


Fig. 15 Typical DC Current Gain vs. Collector Current

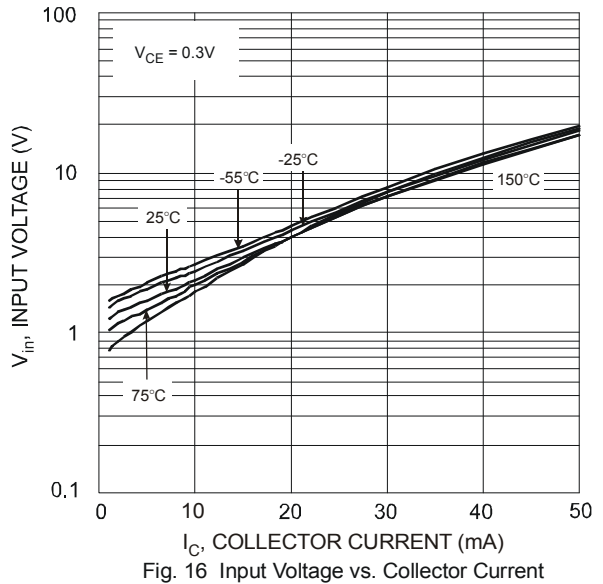


Fig. 16 Input Voltage vs. Collector Current

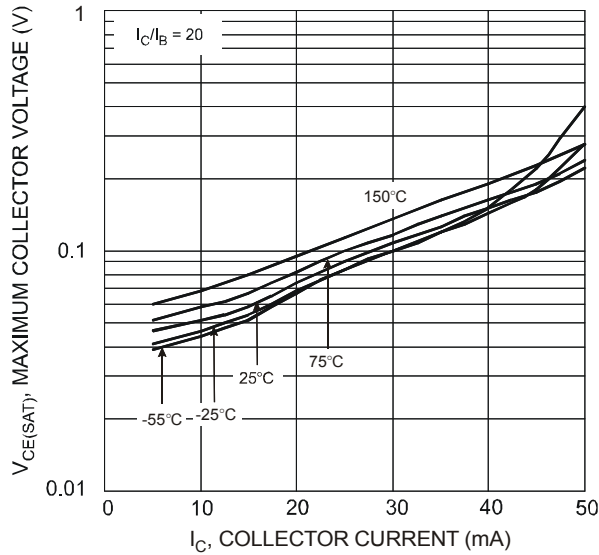



Fig. 17 $V_{CE(SAT)}$ vs. I_C

Ordering Information (Note 5)

| Device | Packaging | Shipping |
|---------------|-----------|------------------|
| DDTC123EE-7-F | SOT-523 | 3000/Tape & Reel |
| DDTC143EE-7-F | SOT-523 | 3000/Tape & Reel |
| DDTC114EE-7-F | SOT-523 | 3000/Tape & Reel |
| DDTC124EE-7-F | SOT-523 | 3000/Tape & Reel |
| DDTC144EE-7-F | SOT-523 | 3000/Tape & Reel |
| DDTC115EE-7-F | SOT-523 | 3000/Tape & Reel |

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



Nxx = Product Type Marking Code (See Page 1)
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.