

- Compact 1"x1"x0.4" standard package
- Ultra-wide 4:1 input voltage range  
9–36, 18–75, 36–160 VDC
- EN 50155 and EN 61373 approval for railway applications
- Qualification for fire behaviour according to EN 45545-2
- 3000 VDC I/O-isolation
- High efficiency up to 91%
- Operating temperature range –40°C to +90°C
- Under-voltage lock out circuit
- Adjustable output voltage & Remote On/Off



The THN 15WIR series is a family of ruggedized 15 Watt DC/DC converters for highest reliability in harsh environments. The converters have an increased resistance against electromagnetic interference, shock/vibration and thermal shock. The approvals according to standards EN 50155 and EN 61373 qualify them for railway and transportation systems. The qualification for the fire behaviour of components according to EN 45545-2 and the safety approval according IEC/EN 60950-1, UL60950-1 support a potential compliance test of the application. Built-in EMI 55032 class A filter, input under-voltage-lockout, short circuit protection, remote On/Off and output voltage trim are further features which facilitate the design in.

Models				
Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
THN 15-2410WIR	9 - 36 VDC (nominal 24 VDC)	3.3 VDC	4500 mA	88 %
THN 15-2411WIR		5.0 VDC	3000 mA	89 %
THN 15-2412WIR		12 VDC	1300 mA	89 %
THN 15-2413WIR		15 VDC	1000 mA	89 %
THN 15-2415WIR		24 VDC	625 mA	90 %
THN 15-2421WIR		±5 VDC	±1500 mA	86 %
THN 15-2422WIR		±12 VDC	±625 mA	89 %
THN 15-2423WIR		±15 VDC	±500 mA	89 %
THN 15-2425WIR		±24 VDC	±315 mA	91 %
THN 15-4810WIR		18 - 75 VDC (nominal 48 VDC)	3.3 VDC	4500 mA
THN 15-4811WIR	5.0 VDC		3000 mA	89 %
THN 15-4812WIR	12 VDC		1300 mA	89 %
THN 15-4813WIR	15 VDC		1000 mA	89 %
THN 15-4815WIR	24 VDC		625 mA	91 %
THN 15-4821WIR	±5 VDC		±1500 mA	86 %
THN 15-4822WIR	±12 VDC		±625 mA	90 %
THN 15-4823WIR	±15 VDC		±500 mA	89 %
THN 15-4825WIR	±24 VDC		±315 mA	90 %
THN 15-7210WIR	36 - 160 VDC (nominal 72 VDC)		3.3 VDC	4500 mA
THN 15-7211WIR		5.0 VDC	3000 mA	89 %
THN 15-7212WIR		12 VDC	1300 mA	89 %
THN 15-7213WIR		15 VDC	1000 mA	89 %
THN 15-7215WIR		24 VDC	625 mA	90 %
THN 15-7221WIR		±5 VDC	±1500 mA	85 %
THN 15-7222WIR		±12 VDC	±625 mA	89 %
THN 15-7223WIR		±15 VDC	±500 mA	89 %
THN 15-7225WIR		±24 VDC	±315 mA	90 %

## Input Specifications

Input current no load	24 Vin models: 12 mA typ. 48 Vin models: 10 mA typ. 72 Vin models: 8 mA typ.
Surge voltage (1 s max.)	24 Vin models: 50 V max. 48 Vin models: 100 V max. 72 Vin models: 185 V max.
Start-up voltage	24 Vin models: 9 VDC (or lower) 48 Vin models: 18 VDC (or lower) 72 Vin models: 38 VDC (or lower)
Start-up time	40 ms max.
Under voltage shut down	24 Vin models: 8 VDC typ. 48 Vin models: 16 VDC typ. 72 Vin models: 35 VDC typ.
Input filter	Pi-type
Reflected input ripple current	30 mA <sub>p-p</sub> typ.
Electromagnetic compatibility (EMC), Emissions	EN 55011, EN 55032 class A (internal), class B (with external components)
Electromagnetic compatibility (EMC), Immunity	EN 55024, EN 50155
– Electrostatic discharge (ESD)	EN 61000-4-2, ±8 kV/±6 kV, perf. criteria A
– Radiated RF field immunity	EN 61000-4-3, 10 V/m, perf. criteria A
– Electrical fast transient / Surge immunity	EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A
– with external components:	24 Vin models: capacitor 220µF/100V and TVS (58V, 3kW) 48 Vin models: Nippon chemi-con KY capacitor 220µF/100V 72 Vin models: capacitor 150µF/200V and TVS (300V, 600W)
– Immunity to conducted RF disturbances	EN 61000-4-6, 10 V <sub>rms</sub> , perf. criteria A
– Magnetic field immunity	EN 61000-4-8, 100 A/m continuous, perf. criteria A 1000 A/m 1s, perf. criteria A

## Output Specifications

Voltage set accuracy	±1 % max.
Voltage adjustability (by connecting external resistor)	12, 15 VDC models: –10 % / +20 % other models: ±10 %
Regulation	– Input variation: single output: 0.2 % max. dual output: 0.5 % max. – Load variation 0 – 100 %: single output: 0.2 % max. dual output: 1 % max. – cross regulation (asymmetrical load 25%/100 %): 5 % max.
Minimum load	not required
Ripple and noise (20 MHz Bandwidth)	–Single output: 3.3 & 5.0 VDC models: 75 mV <sub>p-p</sub> typ. (with 10µF/6.3V X7R MLCC) 12 & 15 VDC models: 100 mV <sub>p-p</sub> typ. (with 1µF/25 V X7R MLCC) 24 VDC model: 125 mV <sub>p-p</sub> typ. (with 2.2µF/50 V X7R MLCC) –Dual output: 5 VDC model: 75 mV <sub>p-p</sub> typ. (each 10µF / 6.3V X7R MLCC) 12 & 15 VDC models: 100 mV <sub>p-p</sub> typ. (each 1µF / 25 V X7R MLCC) 24 VDC model: 125 mV <sub>p-p</sub> typ. (each 2.2µF/50 V X7R MLCC)
Transient Response (25% load step change)	250 µs typ.
– Recovery time	

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### Output Specifications (continued)

Current limitation		at 170% typ. of I <sub>out</sub> max.
Short circuit protection		continuous, automatic recovery
Overvoltage protection		3.3 VDC model: 3.7 – 5.4 VDC 5.0 VDC model: 5.6 – 7.0 VDC 12 VDC model: 13.5 – 19.6 VDC 15VDC model: 18.3 – 22.0 VDC 24 VDC model: 29.1 – 32.5 VDC
Capacitive load	–Single output	3.3 VDC models: 5'200 µF max. 5.0 VDC models: 3'600 µF max. 12 VDC models: 600 µF max. 15 VDC models: 500 µF max. 24 VDC models: 200 µF max.
	–Dual output	±5 VDC models: ±1'500 µF max. (each output) ±12 VDC models: ±360 µF max. (each output) ±15 VDC models: ±250 µF max. (each output) ±24VDC models: ±100 µF max. (each output)

### General Specifications


Temperature ranges	<ul style="list-style-type: none"> <li>– Operating (convection cooling 20LFM, 0,1m/s)</li> <li>– Case temperature</li> <li>– Storage temperature</li> </ul>	–40°C to +90°C (with derating) +105°C max. –55°C to +125°C
Derating		3.3 %/K above 75°C
Humidity (non condensing)		5 – 95 % rel H max.
Temperature coefficient		±0.02 %/K max.
Thermal impedance	without heatsink: with heatsink:	17.0 K/W typ. 15.3 K/W typ.
Thermal shock		acc. MIL-STD-810F
Shock & Vibration		acc. MIL-STD-810F, EN61373
Isolation voltage	<ul style="list-style-type: none"> <li>– Input to Output isolation voltage (60 sec.)</li> <li>– Input/Output to Case isolation voltage (60 sec.)</li> </ul>	3'000 VDC 1'600 VDC
Isolation capacitance (input/output)		3'000 pF max.
Isolation resistance (input/output)		>1 Gohm
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		1'600'000 h
Switching frequency	3.3 & 5.0 VDC models: other models:	245 kHz typ. (±25 kHz) 300 kHz typ. (±30 kHz)
Remote On/Off	<ul style="list-style-type: none"> <li>– On:</li> <li>– Off:</li> <li>– Off idle current:</li> </ul>	3.0 to 15 VDC or open circuit 0 to 1.2 VDC or short circuit pin 6 and pin 2 2.5 mA typ.
Safety standards /approvals	<ul style="list-style-type: none"> <li>– Certification documents</li> </ul>	IEC/EN 60950-1 UL 60950-1 <a href="http://www.tracopower.com/overview/thn15wir">www.tracopower.com/overview/thn15wir</a>
Environmental compliance	<ul style="list-style-type: none"> <li>– Reach</li> <li>– RoHS</li> <li>– Flammability identified acc. EN 45545-2</li> </ul>	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> RoHS directive 2011/65/EU <a href="http://www.tracopower.com/info/en45545-declaration.pdf">www.tracopower.com/info/en45545-declaration.pdf</a>

### Physical Specifications

Casing material	copper
Base material	FR4 PCB
Potting material	Silicone (UL94 V-0 rated)
Package weight	16.5 g (0,58 oz)
Soldering temperature	260°C / 10 s max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### Outline Dimensions




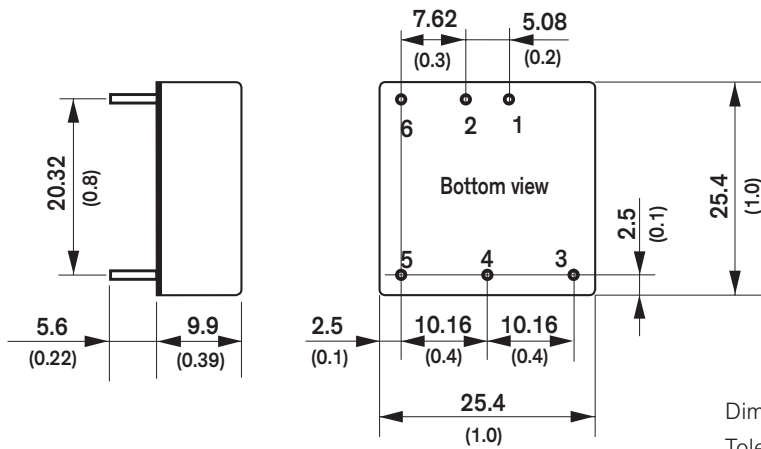


Pin-Out		
Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	On/Off	On/Off

Dimensions in [mm], ( ) = Inch  
 Tolerances:  $\pm 0.5$  (0.02)  
 Pin pitch tolerance:  $\pm 0.25$  (0.01)  
 Pin diameter: 1.0 (0.04)  $\pm 0.1$  (0.004)

### Optional heatsink

<b>Order code</b>	THN-HS1
<b>Content</b>	Heatsink, thermal pad, 2 clamps
<b>Material</b>	Aluminum
<b>Finish</b>	Anodic treatment (black)
<b>Weight</b>	8g (0.28 oz) without converter

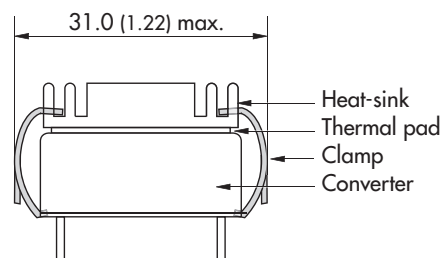

Dimensions in mm, ( ) = Inch



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.