


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


NOTES:

1. SEE SHEETS 2, 3 & 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

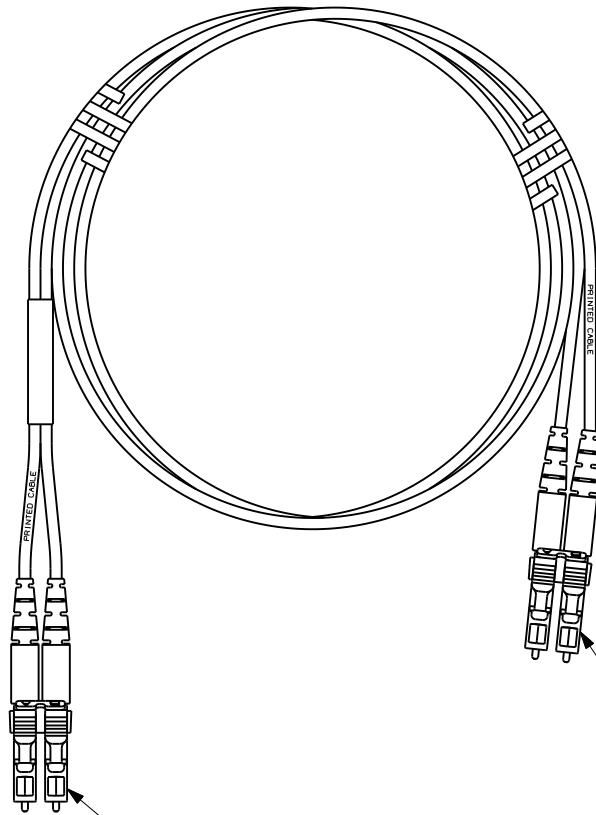

DUPLEXED LC CONNECTORS
(PRINTED CABLE SIDE B)

DUPLEXED LC CONNECTORS
(PRINTED CABLE SIDE A)



										FIBER OPTIC PATCH CORD DUPLEX LC TO LC CONFIGURATION CUSTOMER DRAWING			
										 PANDUIT ™ CORP. TINLEY PARK, ILL 60477			
										ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.		DRAWING FILENAME M02779BC_DC/01A	
										DIMENSIONAL TOLERANCES ARE: (.X) ±.010 (0.3) (.XX) ±.03 (0.8) ANGLES		SCALE NONE	
										THIRD ANGLE PROJECTION		PART NO. SEE SHEETS 2, 3 & 4	
										DRAWN BY MC		REVIEW DRAWING NUMBERS	
										DATE 04-27-07		DRAWING NO. 02779-11	
										CHK'D RAF		SIZE A	
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-11								
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH				

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX LC TO LC FIBER OPTIC PATCH CORD							
PANDUIT PART NO.	CABLE				LC CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	BOOT COLOR
F5E10-10M*Y	RISER (OFNR)	50/125um	DUPLEX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK
F6E10-10M*Y		62.5/125um					ELECTRIC IVORY
FXE10-10M*Y		10GbE OM3		AQUA	0.25dB	26dB	AQUA
FXOE10-10M*		OPTIMIZED 10GbE OM3			0.15dB	26dB	
FZE10-10M*		10GbE OM4		AQUA	0.25dB	26dB	AQUA
FZOE10-10M*		OPTIMIZED 10GbE OM4			0.15dB	26dB	
F9E10-10M*Y		9/125um OS1		YELLOW	0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET



REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-11				

		PANDUIT TM CORP. TINLEY PARK, ILL 60477	
 THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (0.3) ±.008 ANGLES	DRAWING FILENAME M02779BC_DC/01A SCALE NONE	
DRAWN BY MC DATE 04-27-07 CHK'D RAF		REVIEW DRAWING NUMBERS PART NO. SEE SHEETS 2, 3 & 4 DRAWING NO. 02779-11 SHEET 2 OF 4 SIZE A	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX LC TO LC FIBER OPTIC PATCH CORD							
PANDUIT PART NO.	CABLE				LC CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	BOOT COLOR
F5PE10-10M*	PLENUM (OFNP)	50/125um OM2	DUPLEX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK
F6PE10-10M*		62.5/125um OM1					ELECTRIC IVORY
FXPE10-10M*		10GbE OM3		AQUA	0.25dB	26dB	AQUA
FXOPE10-10M*		OPTIMIZED 10GbE OM3			0.15dB	26dB	
FZPE10-10M*		10GbE OM4		AQUA	0.25dB	26dB	AQUA
FZOPE10-10M*		OPTIMIZED 10GbE OM4			0.15dB	26dB	
F9PE10-10M*		9/125um OS1		YELLOW	0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET



REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	FIBER OPTIC PATCH CORD DUPLEX LC TO LC CONFIGURATION CUSTOMER DRAWING		
										 PANDUIT TM CORP. TINLEY PARK, ILL 60477	ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (0.3) ±.008 ANGLES	DRAWING FILENAME M02779BC_DC/01A
										 THIRD ANGLE PROJECTION	SCALE NONE	
										DRAWN BY MC	REVIEW DRAWING NUMBERS	
										DATE 04-27-07	PART NO. SEE SHEETS 2, 3 & 4	
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-11					CHK'D RAF	DRAWING NO. 02779-11 SHEET 3 OF 4	SIZE A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX LC TO LC FIBER OPTIC PATCH CORD							
PANDUIT PART NO.	CABLE				LC CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	MIN. RL	BOOT COLOR
F5LE10-10M*	LOW SMOKE ZERO HALOGEN (LSZH) IEC	50/125um OM2	DUPLEX 1.6mm ZIPCORD	ORANGE	0.25dB	20dB	BLACK
F6LE10-10M*		62.5/125um OM1					ELECTRIC IVORY
FXLE10-10M*		10GbE OM3		AQUA	0.25dB	26dB	AQUA
FXOLE10-10M*		OPTIMIZED 10GbE OM3			0.15dB	26dB	
FZLE10-10M*		10GbE OM4		AQUA	0.25dB	26dB	AQUA
FZOLE10-10M*		OPTIMIZED 10GbE OM4			0.15dB	26dB	
F9LE10-10M*		9/125um OS1		YELLOW	0.35dB	55dB	BLUE

* - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-11				

		PANDUIT TM CORP. TINLEY PARK, ILL 60477	
 THIRD ANGLE PROJECTION		ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.005 ANGLES	
DRAWN BY MC		REVIEW DRAWING NUMBERS	
DATE 04-27-07		DRAWING FILENAME M02779BC_DC/01A	
CHK'D RAF		SCALE NONE	
PART NO. SEE SHEETS 2, 3 & 4		DRAWING NO. 02779-11	
SHEET 4 OF 4		SIZE A	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.