

NOTES:

1. MATERIALS AND FINISHES:

- BODY - BRASS - NICKEL PLATED
CONTACT - BeCu - TIN PLATED
REAR CONTACT - BRASS - TIN PLATED
FERRULE - COPPER ALLOY - NICKEL PLATED
INSULATOR - PTFE

2. ELECTRICAL:


- A. IMPEDANCE = 75 OHMS, NOMINAL
B. RETURN LOSS = 20 dB MINIMUM (DC TO 1.0 GHz)
15 dB MINIMUM (1.0 TO 3.0 GHz)

3. PHYSICAL:

- A. OPERATING TEMPERATURE = -40°F TO +140°F

4. CABLE ASSEMBLY INSTRUCTIONS:

- A. USE RG-179 TYPE CABLE.
B. SLIP THE FERRULE OVER THE CABLE.
C. REFER TO THE CABLE STRIPPING DIMENSIONS TO PREPARE THE CABLE.
D. SOLDER PIN TO CENTER CONDUCTOR, PIN MUST BUTT ON DIELECTRIC.
E. USE 0.128 HEX TOOL TO CRIMP THE FERRULE AMPHENOL DIE SET P/N 227-1221-3.

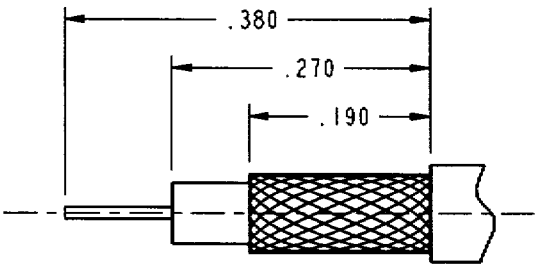

CABLE STRIPPING DIMENSIONS

SCALE 5.000

531-40088

DRAWING NO.

THIRD ANGLE PROJ.

REV

A

B

REVISIONS

DESCRIPTION

RELEASE TO MANUFACTURING

SEE SHEET 1

DATE

12-Oct-00

10/24/00

ECO

43540


43568

APPR


BCG

BCG

CUSTOMER OUTLINE DRAWING
FOR REFERENCE ONLY

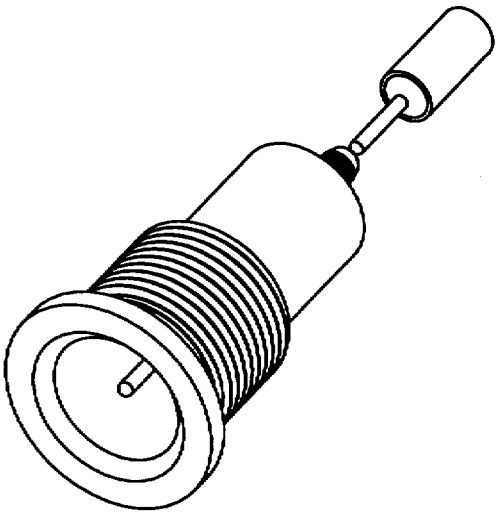

SCALE 2.000

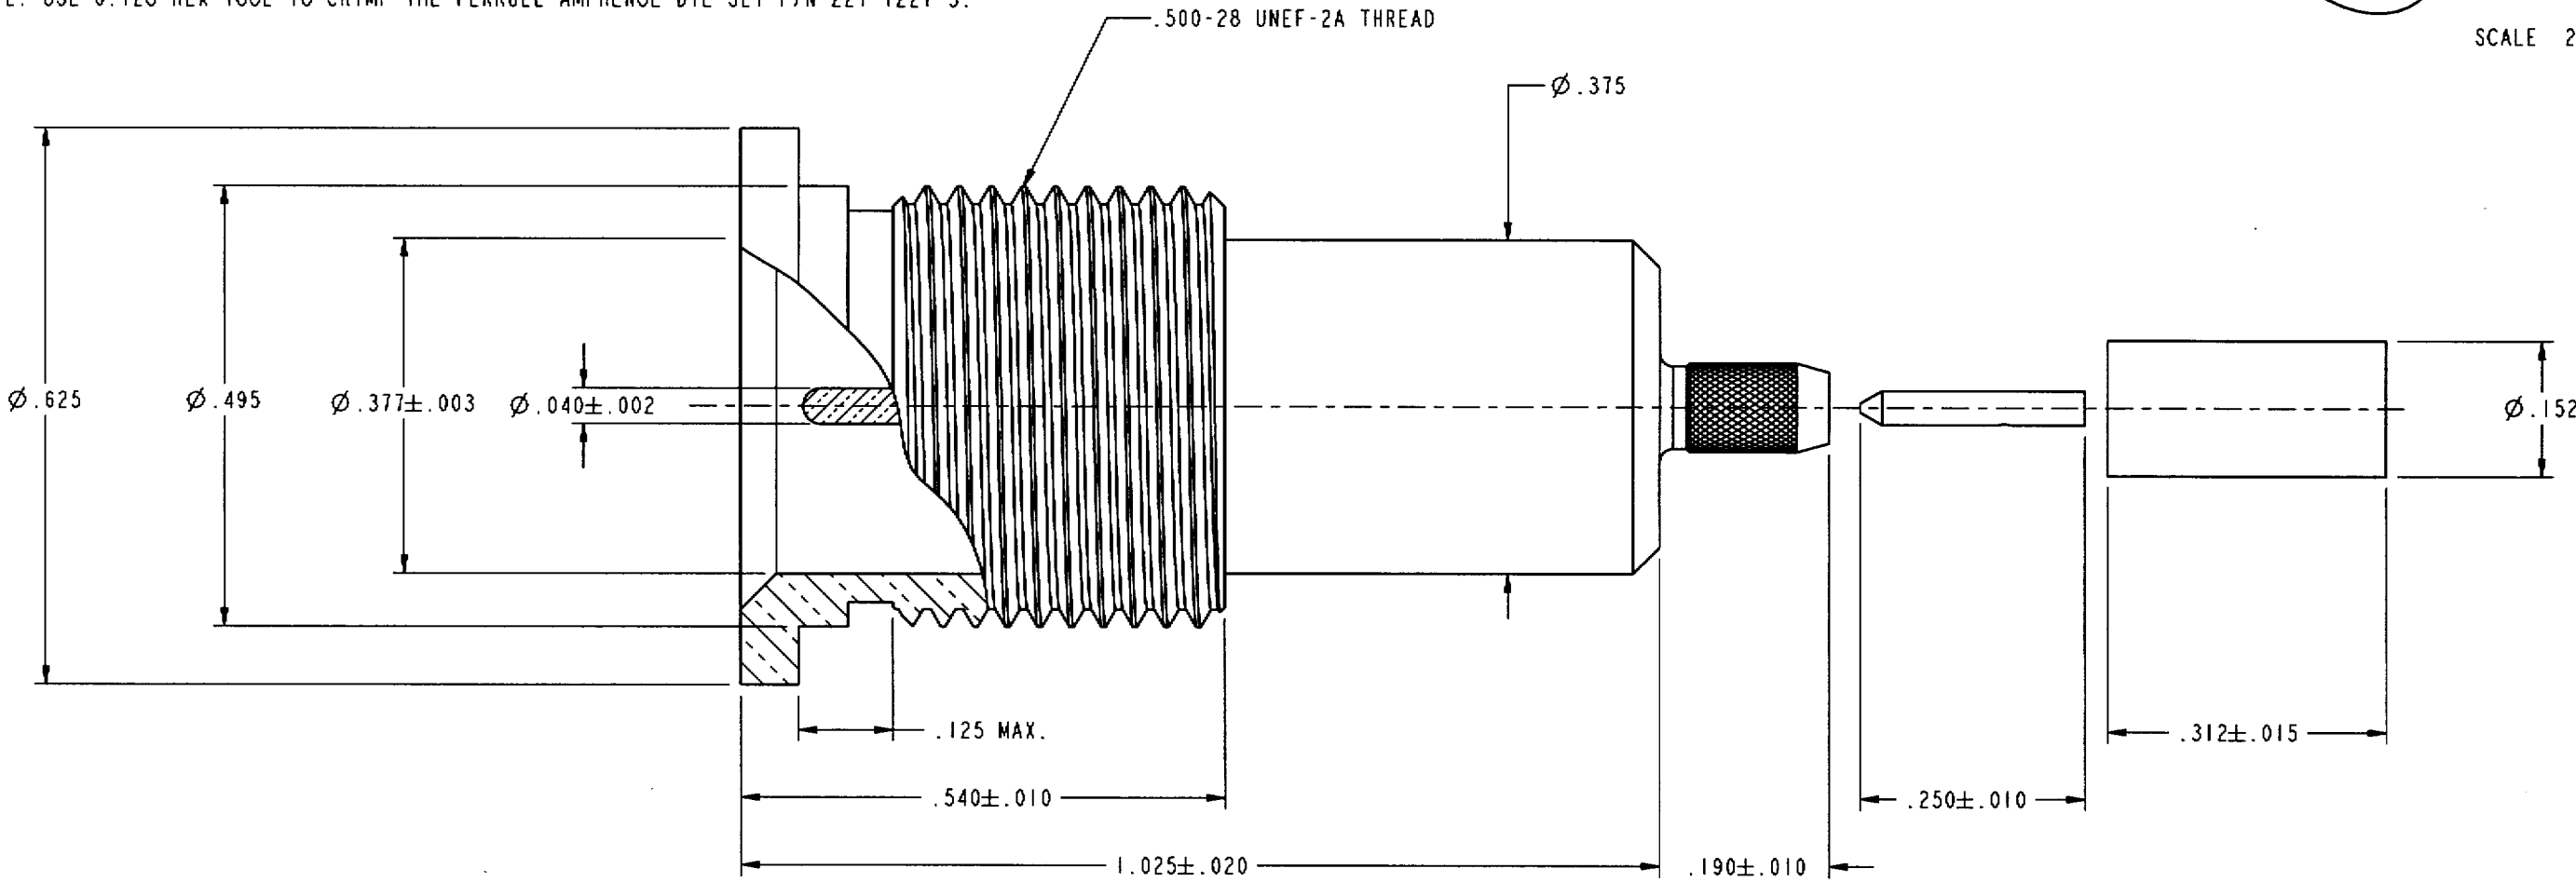

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES
±.015 (0.381 mm) ±.005 (0.127 mm) ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE
SCIENTIFIC ATLANTA
616X-1039-100
EAR# 967651-0
GEN# ASSYMI_G

DRAWN

B.C. GLEISSNER

DATE

29-Sep-00

ENGINEER

B.C. GLEISSNER

DATE

29-Sep-00

APPROVED

O. BARTHELMES

DATE

06-Oct-00

CAD FILE

I:\CATV\F&G\531-40088

TITLE

'G' PLUG,
STRAIGHT, BULKHEAD
FOR RG-179

Amphenol

Amphenol Corporation
Communication and Network
Products Division
Danbury, CT U.S.A. 06810

SCALE: 5.0:1

SHEET 2 OF 2

CODE ID

74868

DWG SIZE

B

DRAWING NO.

531-40088

REV

B



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.